

A line of five workers is shown from the chest up, receding into the distance from left to right. They are all wearing high-visibility orange safety jackets. The worker in the foreground is a Black man wearing a black JSP helmet with a clear visor and safety glasses. The second worker is a man with a beard wearing a black JSP helmet with a clear visor. The third worker is a man wearing a white JSP helmet and safety glasses. The fourth worker is a woman wearing a white JSP helmet and safety glasses. The fifth worker is a man wearing a white JSP helmet and a respirator mask. The background is a textured red.

# PPE PRODUCT GUIDE

MANUFACTURING FOR SAFETY

# TO IMPROVE THE SAFETY, HEALTH & PRODUCTIVITY OF PEOPLE

Dear Partners,

We are very pleased to present JSP's 2025 PPE (Personal Protective Equipment) Product Guide. With new products and more information than before, it provides a comprehensive overview of JSP's ranges.

Operating lean, automated manufacturing at our UK and Germany sites, JSP has never provided faster service to our customers in the UK and throughout Europe. And now with increased capacity we provide customers with the products they want right up to the last minute.



Well worth a deep dive - on each page you will see a QR code - this will take you to the relevant page on [www.jspsafety.com](http://www.jspsafety.com) where there is a plethora of data, information, video and other content on each product.

More information is also available by signing up on our JSP DigiHub interactive platform at [www.jspdigihub.com](http://www.jspdigihub.com).


We have been 'Manufacturing For Safety' since 1964 - on page 07 you will see information on JSP's ESG goals and principles. On page 09 JSP's five sustainability pillars are laid out.

JSP is committed to innovation with a high proportion of our revenue spent on research and development by our in-house teams. JSP products help keep end users safe in ever more dynamic and hazardous environments. Our pipeline of proprietary innovation and new products is formidable.

JSP sells exclusively via its distribution network. We support our valued distributor partners to provide end users with the best PPE products, solutions and services on the market. We are able to produce bespoke items to meet end user requirements, including adding logos and adapting products for specific needs. Working together with our distribution partners we know we all collectively achieve more.

I would like to thank all JSP colleagues, partners and friends for their support in presenting such a superb range of products, helping us to achieve our mission - "To improve the safety, health & productivity of people in the workplace, worldwide".

Yours faithfully,

A handwritten signature in black ink, appearing to read 'Mark R. Johnstone'. The signature is fluid and cursive, written over a white background.

Mark R Johnstone ACA  
Chief Executive  
JSP Group of Companies



# S T I L L L I N G S

## ABOUT US

Research, develop, manufacture.....	.01
Quality assurance.....	.03
Compatibility is key.....	.05
ESG goals.....	.07
Sustainability pillars.....	.09
JSP-GO™ Guides Online.....	.11

## HEAD PROTECTION

Understanding JSP Safety helmet markings.....	.15
Know your PPE's DNA.....	.17
EN 812 Industrial bump caps.....	.19
EN 397 Industrial safety helmets.....	.23
EN 12492 Mountaineering & working at height safety helmets.....	.31
EN 397 & EN12492 Dual standard safety helmets.....	.33
EN 14052 High performance safety helmets.....	.37
EN 397 Industrial safety helmet systems.....	.38
Logo Express® safety helmet and bump cap branding.....	.39
Helmet accessories.....	.41

## RESPIRATORY PROTECTION

Powered air purifying respirators.....	.51
3 Simple steps for an effective face fit.....	.55
Face fit training courses.....	.63
Face fit testing.....	.65
Selecting filters for half & full face masks.....	.67
PressToCheck™ daily face fit check technology.....	.69
Half and full face mask filters.....	.71
Exhalation valve benefits.....	.75
Disposable face masks.....	.77
Cleaning & maintenance.....	.80

## EYE & FACE PROTECTION


Eye & face protection markings guide.....	.83
Eyewear lens guide.....	.85
Safety spectacles.....	.87
Safety overspectacles.....	.93
Safety goggles.....	.95
Faceshields.....	.99
Eye & face accessories.....	.103
Logo Express® Stealth™ 9000 branding.....	.105

## HEARING PROTECTION


Ear defender selection.....	.109
Ear defenders.....	.111
Ear plugs.....	.114
Logo Express® ear defender branding.....	.115

# RESEARCH DEVELOP MANUFACTURE

JSP's in-house Research and Development and state-of-the-art production facilities support the design and manufacture of innovative PPE for today's workplace. Advanced prototyping and design technologies accelerate the development of comfortable, compatible and uncompromising protective solutions.

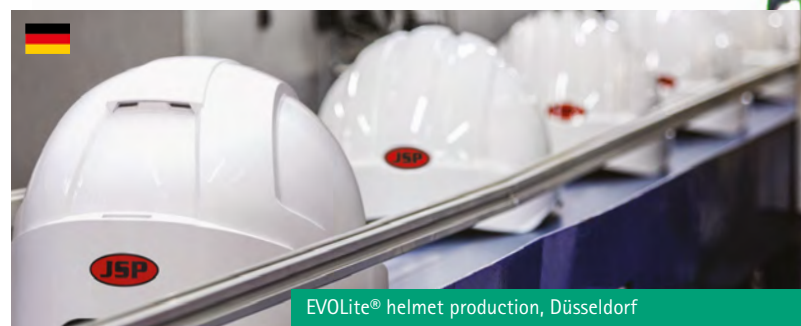

Our lean manufacturing ethos makes JSP highly responsive to customer needs, enabling short runs of bespoke and branded items. Feedback from users and on-site trials directs JSP product innovation, delivering groundbreaking PPE that workers want to wear.

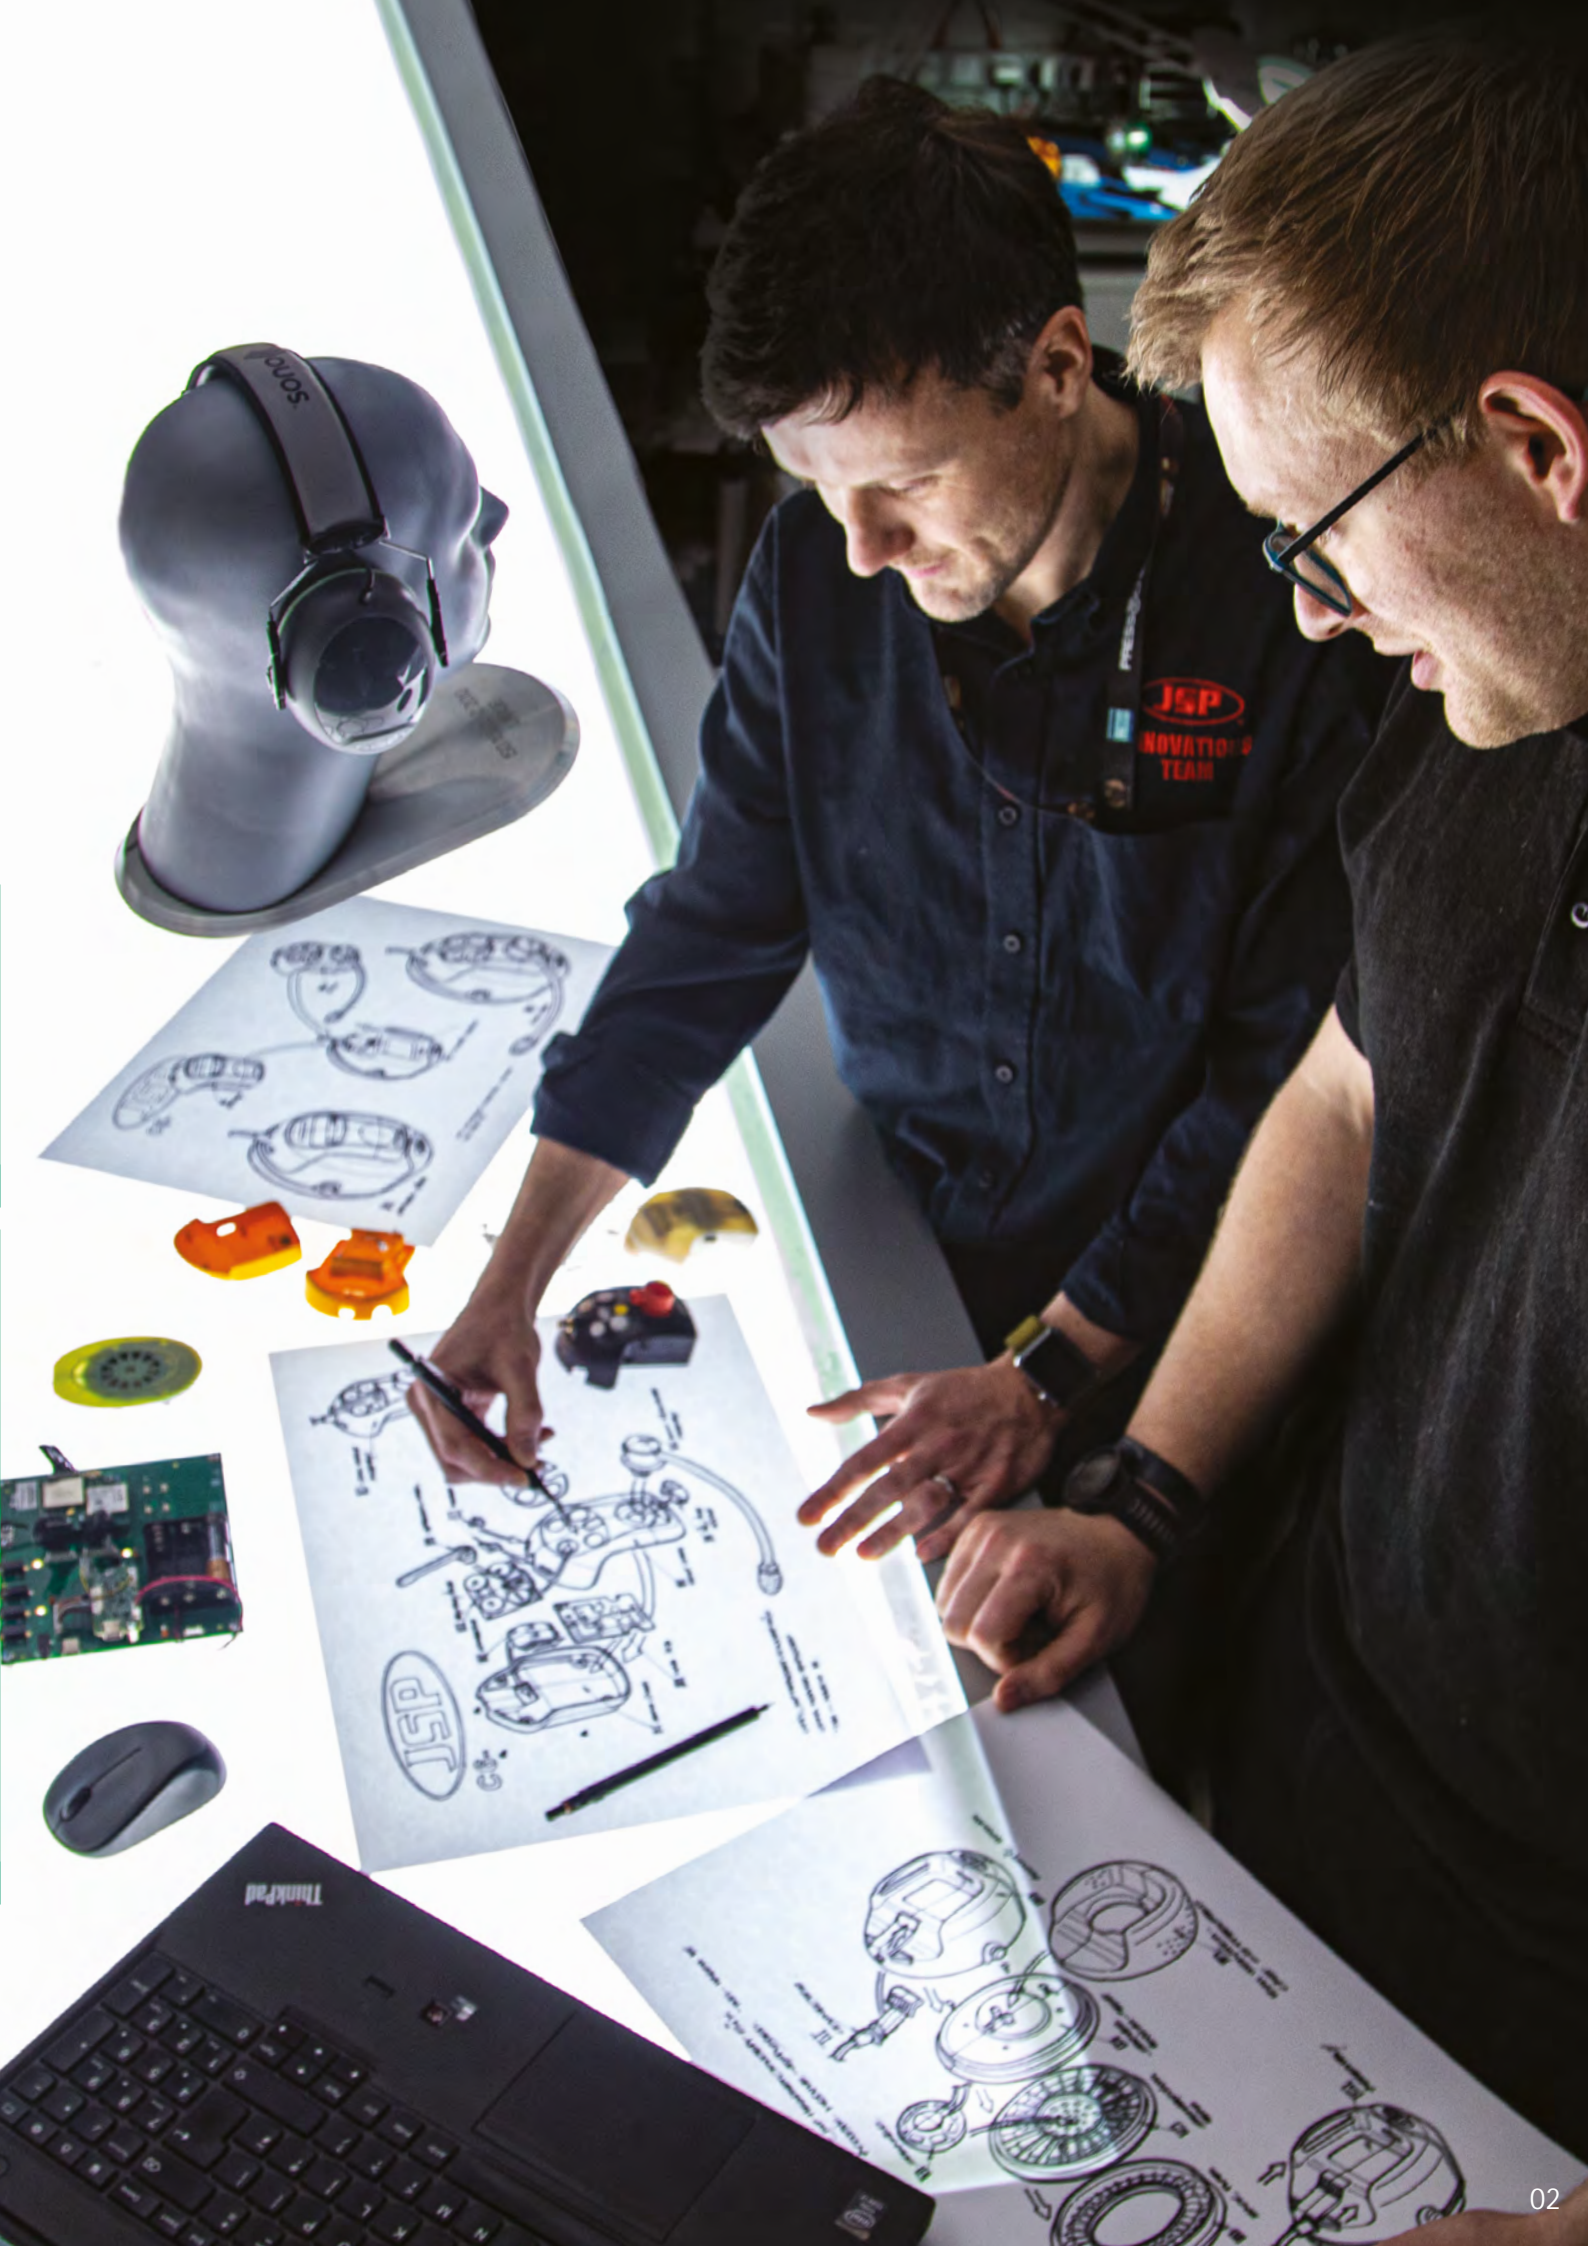

# QUALITY ASSURANCE

JSP PPE conforms to and complies with PPE Regulation 2016/425 as well as the relevant British, European and International standards. Consistent testing and inspection ensures that every JSP product meets strict standards of quality. Our PPE is assessed and certified by world-renowned independent test houses. Products are inspected throughout the production process, and batch-release tested to verify high quality and performance levels.

We operate an ISO 9001 quality management system and run BSI-approved test laboratories at all manufacturing sites. The BSI Kitemark™ licenses covering JSP head, respiratory, hearing, and eye & face ranges are testament to our commitment to quality and continuous product testing for every manufacturing batch.






TIL testing at JSP's UK respiratory test facility



Eye protection impact testing in the QA laboratory

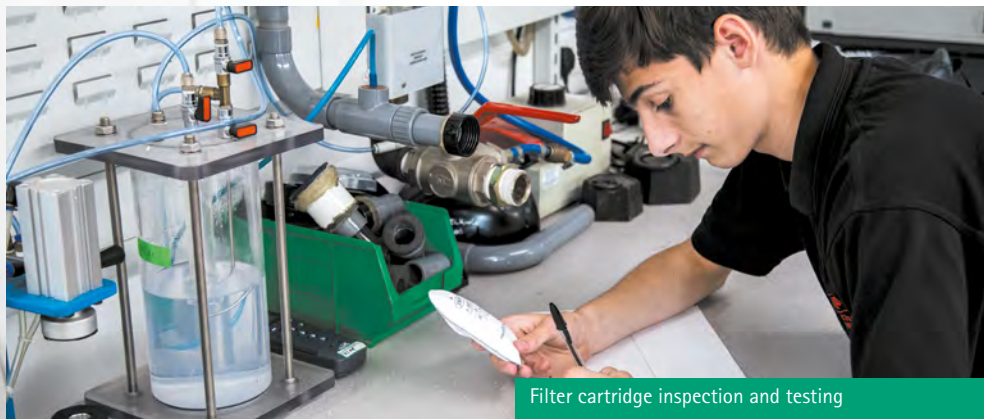

Filter cartridge inspection and testing



*"The Kitemark™ is the ultimate accreditation of quality – it is evidence that ALL production is ongoing batch tested to the relevant Standard which is then audited and verified by the British Standard Institution.*

*- A type examination (CE/UKCA) certificate is the minimum requirement for PPE, with monitoring in place for certain product types, but employing voluntary Kitemark™ schemes ensures all products are subject to the same stringent controls."*



# COMPATIBILITY IS KEY

In accordance with PPE Regulation 2016/425, different items of PPE intended to be worn together must be proven to be compatible.

PPE needs to work in harmony to provide the right level of protection. For example, mounted ear defenders must be tested in combination with specified safety helmets and faceshields – with the combination certified as compatible. Ancillary equipment, such as helmet torches and winter liners, must also be compatible to ensure that the protective function of the PPE is not compromised.



At JSP, we research, design and manufacture 'above the neck' PPE that works together, providing interoperable safety solutions that allow wearers to concentrate on the job!

Testing and certifying PPE combinations enables JSP to provide protection against multiple hazards, assuring comfort, performance and ease of use.



# JSP is fully committed to the following ESG goals and principles to support a more sustainable and inclusive world.

Our strong ESG ethos drives us to enhance efficiency, proactively manage risks, and uphold the highest standards of responsible business practices and compliance. By embedding these principles into our operations, we aim to not only meet but exceed expectations, fostering positive impact and resilience in an increasingly sustainable and socially responsible manner.



# ESG

## ENVIRONMENTAL

- Achieved Zero Waste to Landfill in 2024, across all UK and European manufacturing facilities.
- Greenhouse Gas (GHG) emissions tracking with annual reduction targets certified by Planet Mark.
- Net Zero by 2035.
- Committed to UNGC principles and United Nations Sustainable Development Goals.
- 100% Green electricity consumed by our UK and European operations, including significant investment in Photovoltaic (PV) for our UK safety helmet manufacturing site.
- Energy Saving Opportunity Scheme surveys to support long-term carbon reduction plan.
- Lower carbon mode of transport and onsite electrical charging points.

## SOCIAL

- Human rights, equality, diversity and inclusion, employee development and well-being, fair wages, benefits, and safe working conditions.
- Community engagement and volunteering.
- Health & Safety app for manufacturing operatives, 5S Kaizen training.
- Programs and initiatives for promoting social responsibility and ethical practices.
- Philanthropic activities – 10+ years support of the Lighthouse Charity – the Construction Charity – Octobre Rose and CRASH Charity.
- JSP hosts open days for local schools, colleges, and a Build UK Open Door event, and actively supports apprenticeships.

## GOVERNANCE

- Transparency and accountability, commitment to ethical trading, corporate policies, cyber security, risk management, internal controls and audits, compliance and regulatory adherence, sustainability and corporate social responsibility.
- ISO9001, ISO45001 and ISO14001.
- SEDEX member, SMETA audits (Sedex Members Ethical Trade Audit).
- EcoVadis Silver – 91st Percentile. Rated in top 3% of manufacturing companies assessed.
- Gold member of the Supply Chain Sustainability School.
- Industry organisations: BSIF, RSSS, Build UK, Synamap, Asepal, Assosistema, ISEA, Febelsafe, and IVPS.

# SUSTAINABILITY PILLARS



OUR  
FIVE  
KEY  
PILLARS  
ARE

## PRODUCT DESIGN

- Commitment to design innovative products and solutions to enable users to operate more sustainably.
- In-house Research & Development teams focus on 'Design for Sustainability' with robustness, flexibility & adaptability.
- Reusable products with replacement parts for durability and longevity: extending lifespan to reduce waste and lower cost of ownership.
- Consumer-centric driven designs for worker comfort and compliance with extensive beta trials optimising sustainability, wearability, compatibility, functionality and inclusivity for all genders and nationalities.

## MATERIAL

- Local, ethically, and sustainably sourced high-performance materials.
- Responsible sourcing throughout supply chain considering the environmental impact.
- Innovative sustainable materials and technologies to lower carbon footprint of product.
- Use of durable, long-lasting materials designed for product longevity and easy end-of-life recyclability.

Sustainability at JSP encompasses a holistic approach, considering the environmental, social, and economic impacts throughout the product's lifecycle. Each pillar represents a key stage of the product lifecycle, with information under each pillar to showcase our sustainable practices.

By analysing each key process, JSP can target lowering the carbon footprint of a product whilst still providing you with high-quality PPE supporting your commitment to environmental sustainability.



## MANUFACTURING

- Energy efficiency using facilities energy management system and energy audits.
- Upgrade to energy efficient equipment using the latest technologies.
- Vertical Integration of manufacturing to reduce component miles, sustainable production practices reducing waste and energy consumption.
- Investing in and harnessing renewable energy.
- Employee training in best practice energy management.



## PACKAGING

- Internal packaging audit using reduce, reuse, recycle principles without compromising product quality.
- Focus on sustainable options with increased end of life recyclability and reuse.
- Compliance of packaging materials with relevant environmental and social regulations.
- Industry packaging certifications including FSC and GRS.



## PRODUCT LIFE

- Durable high-quality products with replacement parts to prolong product life.
- Encourage responsible product use through education and training on JSP GO™.
- Product design for ease of product disassembly for easy maintenance and end of life recycling.
- Lifecycle analysis (LCA) of products – cradle to grave analysis to evaluate impact of materials, manufacturing processes and disposal of product at end of life.



# GUIDES ONLINE

JSP-GO™ is like having our team of experts in your pocket!

We are committed to making information about your PPE easy to access and simple to understand.

JSPGO.com provides 24/7 access to safety critical information, supporting you with guidance on proper selection, use, care and maintenance.


Graphical explanations show suitable applications and important factors to consider when selecting PPE. Features and performance levels are made easy to understand with icons on the product packaging linking to detailed descriptions on the JSP-GO™ website.

Digital user guides and tutorial videos demonstrate how to fit and maintain products correctly.






FITTING

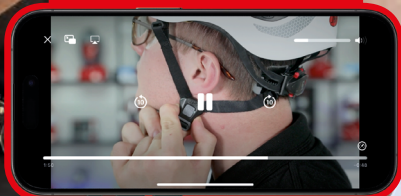

MAINTENANCE

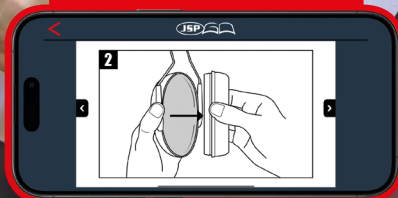

# HEAD PROTECTION

An estimated 69 million cases of Traumatic Brain Injury (TBI) are reported worldwide every year.\* To combat risks in the workplace it is important to select high quality PPE. As leaders in head protection, JSP are committed to protecting workforces around the world.

Our safety helmets are designed, manufactured, and tested at our manufacturing headquarters in Oxfordshire, UK, with additional manufacturing and testing facilities in Düsseldorf, Germany, and further regions across the globe. The BSI Kitemark™ scheme for head protection provides assurance of the rigorous production and testing controls in place for each batch of helmets and bump caps. JSPCheck™ offers access to detailed information for traceability, enabling users to pinpoint the exact time and location of production to verify authenticity and performance. With compatible accessories and complete above-the-neck solutions, JSP head protection offers high performing products backed-up by full technical support.



\*Dewan et al., Estimating the global incidence of traumatic brain injury. J. Neurosurg. 2018



012  
C LUD NMM



JSP Ltd. OX29 0TA, UK

EVO<sup>03</sup> NON-VENTED

[www.jsp-safety.com](http://www.jsp-safety.com)












KM579403



# UNDERSTANDING JSP SAFETY HELMET MARKINGS

JSP safety helmets are manufactured under both the ISO9001 Quality Management System (QMS) and the British Standard Institution's (BSI) Kitemark™ scheme. They not only comply with but often exceed all relevant international performance standards. See below for a guide to the markings found on your JSP safety helmet.

	Manufacturers Trademark.		Product logo name / identifier.
<b>Design Registered</b>	The design registered mark prevents others from using the design without permission and also indicates that the helmet is genuine.		Indicates that the product manufacture meets international performance and quality management standards as assessed by the British Safety Institute.
	Manufacturing date wheel: year of manufacture indicated in centre, month shown by arrow.		Some components can be recycled. A number inside the triangle refers to the type of material.
	Conformity to Regulation (EU) 2016/425.		Conformity to Regulation (EU) 2016/425 as amended to apply in GB.
<b>53-64 cm</b>	The size range of the helmet, head circumference.		
<b>EN 397:</b> - - - -	The European Standard Number for Industrial Safety Helmets and its year of publication.	<b>A#:</b> - - - -	Amendment to EN 397 and its year of publication.
<b>EN 50365:</b> - - - -	The European Standard Number for electrically insulating helmets for use on low voltage installations and its year of publication.		This helmet is electrically insulated for use working live or close to live parts on installations not exceeding 1000 V a.c. or 1500 V d.c.
<b>440 V a.c.</b>	The helmet will protect the user against short term, accidental contact with live electrical conductors up to a voltage of 440 V a.c.	<b>-20°C / -30°C / -40°C</b>	The helmet will provide some protection when worn in an environment at or above these temperatures.
<b>MM</b>	The helmet will provide some protection against molten metal splash.	<b>LD</b>	The helmet will provide some protection from lateral compressive loads.
<b>ANSI/ISEA Z89.1- 2014</b>	The American Standard (ANSI) for Industrial Head Protection and its year of publication.		Harness can be inserted for reverse donning.
<b>TYPE I</b>	The helmet is intended to reduce the force of impact resulting from a blow only to the top of the head.	<b>CLASS C</b>	The helmet is not intended to provide protection against contact with electrical hazards.
<b>LT</b>	The helmet will provide some protection when worn in an environment at or above -30°C.	<b>HT</b>	The helmet will provide some protection when worn in an environment at or below +60°C.

# KNOW YOUR PPE'S DNA

JSPCheck™ is the first online verification system enabling you to check the DNA of your PPE – giving assured protection and traceability.

The unique JSPCheck™ system allows end users to validate JSP EVO® helmets and Sonis® ear defenders. The individual manufacturing barcode reveals everything about the DNA of that product – the date and time of manufacture to the very second, the materials used, machine settings, and quality testing information. The process is quick and easy:

- ✔ VISIT [WWW.JSPCHECK.COM](http://WWW.JSPCHECK.COM)
- ✔ FOLLOW TWO SIMPLE STEPS
- ✔ CLICK 'VERIFY'

Full product traceability information will be delivered to your inbox in under a minute. JSPCheck™ can be accessed using any PC, laptop, tablet or smart phone, from anywhere in the world.

**LABEL ON THE OUTSIDE OF THE HELMET:**

Country of Origin → Made In UK

JSPCheck™ URL → [JSPCHECK.COM](http://JSPCHECK.COM)

BSI Kitemark & Number → KM579403

EAN Barcode → 5 038428 553704

JSP Product Code → AJF030-000-100

Date of Manufacture → 30/10/24

Unique product barcode →

Unique Serial Number → 7031090256

**LABEL ON THE INSIDE OF THE HELMET:**

Country of origin → Made In UK

JSPCheck™ URL → [JSPCHECK.COM](http://JSPCHECK.COM)

BSI Kitemark & Number → KM579403

EAN Barcode → 5 038428 553704

JSP Product Code → AJF030-000-100

Date of Manufacture → 30/10/24

Unique product barcode →

Unique Serial Number → 7031090256

Warranty: If the inner sticker is removed, the warranty becomes void. → **WARRANTY VOID IF REMOVED**



"The JSPCheck™ system makes each JSP hard hat traceable and gives assurance to the end user regarding the quality of the product. Consequently, the company has been able to position itself as a supplier of reliable head protection."

**Shray Sharma – Research Associate**  
Frost & Sullivan



"This is a very reliable way to establish the authenticity of the product, being able to identify attempted replicas of much less performance."

**James Bednarz – Health & Safety Officer**  
Thomas Vale Construction



"Excellent traceability so that in the event of an incident you can get back to the headgear's birthplace."

**Peter Hopkins – Principal Consultant**  
Richard Lawrence Associates

[www.jspcheck.com](http://www.jspcheck.com)

# EN 812

# INDUSTRIAL BUMP CAPS

The EN 812 standard requires bump caps to be impact tested four times with a 5kg flat striker falling from a height of 250mm with 12.5J of energy. Four penetration tests are carried out using a 0.5kg conical striker dropped from 500mm. Optional requirements include resistance to flame and electrical properties.

A bump cap is intended to provide protection against bumps and scrapes to the head, it should not be used where falling or thrown objects are likely and should not be used where an industrial safety helmet is required.

## QUICK REFERENCE & SELECTION GUIDE

	STANDARDS	BUMP CAP TESTING & PERFORMANCE					SHELL			
		Front /rear impact resistance	Off crown impact resistance	Crown penetration	Operational temperature range	Anti-bacterial Polygiene® StayFresh™ technology	EPP liner	Internal liner material	Recyclable	
EN 812	HARDCAP AEROLITE® Page 21 	EN 812	 12.5 Joules	 2.5 Joules	 2.5 Joules	 +50°C -40°C			 HDPE	
	HARDCAP AEROLITE® 60° Page 21 	EN 812	 12.5 Joules	 2.5 Joules	 2.5 Joules	 +50°C -40°C			 HDPE	
	HARDCAP™ A1+ Page 22 	EN 812	 12.5 Joules	 12.5 Joules	 2.5 Joules	 +50°C -10°C			 HDPE	
	HARDCAP™ A1+ WINTER Page 22 	EN 812	 12.5 Joules	 12.5 Joules	 2.5 Joules	 +50°C -10°C			 HDPE	
	HARDCAP™ A1+ FLAME RETARDANT Page 22 	EN 812	 12.5 Joules	 12.5 Joules	 2.5 Joules	 +50°C -10°C			 HDPE	

	PEAK SIZE			COVER			OPTIONS & GENERAL FEATURES								
	2.5cm Micro peak	5cm Short peak	7cm Long peak	Material	Adjustable elasticated strap and buckle	Reflective area	Air flow technology	ID card holder	Comfort pad	Flame retardant	Chinstrap / harness	Embroidery Logo	Heat Transfer Logos	Machine washable temperature	Weight
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		100% woven Polyester	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Brushed Nylon		<input checked="" type="checkbox"/> 2-pt	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Max 30°C	135g
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		100% woven Polyester	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		Brushed Nylon		<input checked="" type="checkbox"/> 2-pt	<input checked="" type="checkbox"/>		Max 60°C	135g
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Cotton / Polyester	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Max 40°C	198g
		<input checked="" type="checkbox"/>		100% Polyester	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Max 30°C	185g
		<input checked="" type="checkbox"/>		Cotton / Polyester	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Max 40°C	155g

# HARDCAP AEROLITE® THE LIGHTEST FULL SHELL BUMP CAP



Designed by JSP's in-house R&D team, the HardCap Aerolite® weighs less than 135g without compromising on performance. The cap cover features large open weave panels, and reflective details to increase visibility in low light conditions. The comfort pad and sweatband are made with Polygiene® StayFresh™ anti-bacterial technology for improved hygiene and extended product lifespan.




**HARDCAP AEROLITE®**  
5CM SHORT PEAK  
EN 812



**AAF000-002-100** HardCap Aerolite® - short peak - navy

**AAF000-001-100** HardCap Aerolite® - short peak - black

**HARDCAP AEROLITE®**  
2.5cm MICRO PEAK  
EN 812

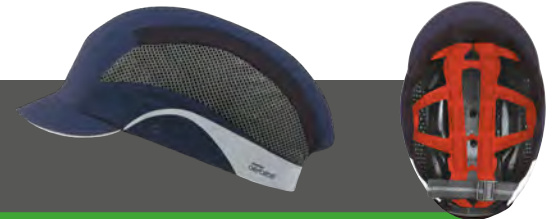

**AAG000-002-100** HardCap Aerolite® - micro peak - navy

**AAG000-001-500** HardCap Aerolite® - micro peak - hi vis yellow

**AAG000-001-100** HardCap Aerolite® - micro peak - black

**AAG000-001-600** HardCap Aerolite® - micro peak - hi vis orange

**AAG000-000-100** HardCap Aerolite® - micro peak - white

# HARDCAP AEROLITE® WITH ID CARD HOLDER



HardCap Aerolite® is available with an integrated badge holder to display identification where security is required. Ideal for businesses, corporations, hospitals, prisons, conventions, trade fairs, and backstage passes used in the entertainment industry.



**HARDCAP AEROLITE®**  
2.5cm MICRO PEAK  
EN 812



**AAG003-402-100** Hardcap Aerolite® - micro peak - navy

# HARDCAP AEROLITE® 60° INDUSTRIAL WASH BUMP CAP



The HardCap AeroLite® 60° weighs less than 135g and is suitable for industrial washing. The protective liner is easy to remove, allowing the outer cap and comfort pad to be machine washed at 60°C for good hygiene and extended product life.



**HARDCAP AEROLITE®**  
2.5CM SHORT PEAK  
EN 812

WASHABLE  
AT 60°C



**AAG002-102-100** HardCap Aerolite® 60° micro peak - navy


**AAG002-100-600** HardCap Aerolite® 60° micro peak - red

**AAG002-100-100** HardCap Aerolite® 60° micro peak - white

# HARDCAP™ A1+ INDUSTRIAL BUMP CAP



HardCap™ A1+ is a sleek, low-profile industrial bump cap with a terry towelling sweatband and built-in ventilation. The cap features a removable cover suitable for machine washing and subtle reflective piping offering increased visibility.

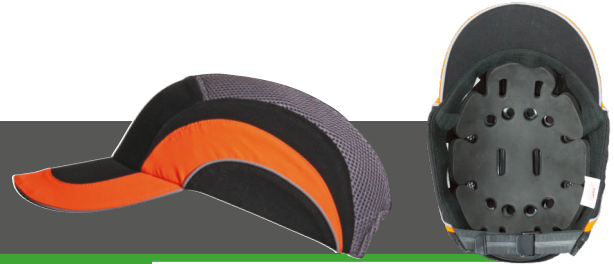

**HARDCAP™ A1+**  
7CM LONG PEAK  
EN 812

**ABR000-000-500** HardCap™ A1+ - long peak - navy

**ABR000-00N-500** HardCap™ A1+ - long peak - black / orange

**HARDCAP™ A1+**  
5CM SHORT PEAK  
EN 812



**ABS000-002-100** HardCap™ A1+ - short peak - navy

**ABS000-00L-500** HardCap™ A1+ - short peak - grey / Red

**ABS000-001-100** HardCap™ A1+ - short peak - black

**ABS000-001-500** HardCap™ A1+ - short peak - hi-vis yellow

**ABS000-005-000** HardCap™ A1+ - short peak - black / grey

**ABS000-001-600** HardCap™ A1+ - short peak - hi-vis orange

**ABS000-00N-500** HardCap™ A1+ - short peak - black / orange

**HARDCAP™ A1+**  
2.5CM MICRO PEAK  
EN 812



**ABT000-002-100** HardCap™ A1+ - micro peak - navy

**ABT000-00L-500** HardCap™ A1+ - micro peak - grey / red

**ABT000-001-100** HardCap™ A1+ - micro peak - black

## HARDCAP™ A1+ WINTER



Made from 100% polyester for extra warmth and comfort, with fold-up ear and neck covers.



**HARDCAP™ A1+**  
5CM SHORT PEAK  
EN 812

**ABW000-001-100** HardCap™ A1+ Winter - black

## HARDCAP™ A1+ FLAME RETARDANT



Meets optional flame retardant 'F' requirements of EN 812, with additional testing to ISO 11612 and ISO 14116.



**HARDCAP™ A1+**  
5CM SHORT PEAK  
EN 812, ISO 11612, ISO 14116

**ABP000-002-100** HardCap™ A1+ Flame Retardant - navy


# EN 397

# INDUSTRIAL SAFETY HELMETS

British and European standards have been setting the performance requirements for industrial safety helmets for over 50 years. EN 397 requires impact testing only to the top of the helmet. A 49J impact to the crown measures shock absorption, tested with a 5kg hemispherical striker dropped from 1m. Penetration testing is

conducted with a 3kg conical striker from 1m. There are no side, front, or rear impact requirements only a lateral rigidity test, which is a slow progressive force loading followed by measurement of any deformation. Optional requirements include molten metal and lateral deformation protection, plus 440V electrical insulation.

## QUICK REFERENCE & SELECTION GUIDE













































































	STANDARDS	HELMET TESTING & PERFORMANCE							
		Crown impact resistance	Side impact resistance	Crown penetration	LD - lateral deformation	Electrical protection	MM - molten metal	Operational temperature range	
EN 397	<b>EVO® ALTA™ BASEWORKER™</b> Page 25 	EN 397 EN 50365	49 Joules	25.5 Joules	29 Joules	LD	Non-vented: 1000V, 440V Vented: 1000V	MM	+50°C -40°C
	<b>EVO® VISTAshield®</b> Page 25 	EN 397 EN 50365 AS/NZS 1801 EN 166 EN 170	49 Joules		29 Joules	LD	Non-vented: 1000V, 440V Vented: 1000V	MM	+50°C -40°C
	<b>EVO® VISTA lens®</b> Page 26 	EN 397 EN 50365 AS/NZS 1801 EN 166 EN 170	49 Joules		29 Joules	LD	Non-vented: 1000V, 440V Vented: 1000V	MM	+50°C -40°C
	<b>EVO® 6100</b> Page 28 	EN 397 EN 50365 ANSI/ISEA Z89.1 AS/NZS 1801	49 Joules		29 Joules	LD	Non-vented only: 1000V, 440V	MM	+50°C -40°C
	<b>EVOLite®</b> Page 27 	EN 397 EN 50365	49 Joules		29 Joules	LD	Non-vented only: 1000V, 440V	MM	+50°C -40°C
	<b>EVO® 3</b> Page 29 	EN 397 EN 50365	49 Joules		29 Joules		Non-vented only: 1000V, 440V	MM	+50°C -40°C
	<b>EVO® 2</b> Page 30 	EN 397 EN 50365	49 Joules		29 Joules		Non-vented only: 1000V, 440V	MM	+50°C -30°C
	<b>MK™ 7.0</b> Page 30 	EN 397 EN 50365	49 Joules		29 Joules		Non-vented only: 1000V, 440V	MM	+50°C -40°C

## EN 50365 – ELECTRICAL INSULATION

EN 50365 is an additional specification applicable to helmets used for working on live installations. The standard sets out requirements for design and electrical testing. Helmets are classified by performance. Class 0 helmets are suitable for use on installations up to 1000Va.c.

## BASEWORKER™ AND LINESMAN CHINSTRAPS:

Chinstraps are optional for EN 397 helmets and must release under a force of 150-250N if caught up creating danger for the user. Chinstrap helmets meeting EN 397 include Baseworker™ and Linesman.


EYEWEAR TESTING & PERFORMANCE						SHELL			HARNESS			OPTIONS & GENERAL FEATURES						
Ultraviolet filter scale number	Impact rating	Operational temperature range	Optical class	Anti-mist Anti-scratch	Visible light transmittance	Helmet material	Internal liner	Recyclable	Textile	Depth adjustment	Wheel ratchet	Ventilated	CR2 reflective	Integrated eyewear	ID card holder	Chinstrap	Lamp bracket & cable loop	Weight
												Optional	Optional					500g
 2C-1.2		 +55°C -5°C		 	 VLT 90%							Optional	Optional	As standard				521g
 2C-1.2		 +55°C -5°C		 	 VLT 90%							Optional	Optional	As standard				490g
												Optional	Optional	Optional				428g
												Optional	Optional	Optional				328g
												Optional	Optional	Optional				372g
												Optional	Optional	Optional				402g
												Optional	Optional	Optional				393g

# EVO® ALTA™ BASEWORKER™ HIGH PERFORMANCE HEAD PROTECTION



The new EVO® ALTA™ offers all-round impact protection. The mountaineering-style helmet features a specialised shell structure and internal liner to increase durability and shock absorption performance. Precise adjustment settings enable a secure fit, ensuring the helmet remains stable.

EVO® ALTA™ is also available with DualSwitch™ chinstrap (EN 397 & EN 12492) and Skyworker™ chinstrap (EN 12492)



**EVO® ALTA™ BASEWORKER™**  
FITTED WITH EN 397 BASEWORKER™ CHINSTRAP  
EN 397, EN 50365

**ARB170-00-\_-00** EVO®ALTA™ Baseworker™ - vented

**ARA170-00-\_-00** EVO®ALTA™ Baseworker™ - non-vented

Replace dashes with colour code: **01 05 11** Extra Visibility: **C7 16**

Replace dashes with colour code: **01 05 11** Extra Visibility: **C7 16**

**EVO® ALTA™ BASEWORKER™**  
FITTED WITH EN 397 BASEWORKER™ CHINSTRAP  
& ID CARD HOLDER  
EN 397, EN 50365

**ARB173-40-\_-00** EVO®ALTA™ Baseworker™ - vented, ID card holder, lamp bracket




Replace dashes with colour code: **01 05 11** Extra Visibility: **C7 16**

# EVO® VISTAshield® VISIONARY PROTECTION



EVO® VISTAshield® is a next generation safety helmet incorporating a fully retractable optical class 1 integrated faceshield offering A-rated impact protection. The visor is easy to deploy, adjust and maintain, ensuring protection is on hand whenever it is required.

Also available in DualSwitch™ (EN 397 & EN 12492) and Skyworker™ (EN 12492) versions.



**EVO® VISTAshield®**  
EN 397, EN 50365, EN 166, EN 170

<b>AMD170-005-F00</b>	EVO® VISTAshield®  white/smoke, vented	<b>AMC170-005-F00</b>	EVO® VISTAshield®  white/smoke, non-vented
<b>AMD170-003-K00</b>	EVO® VISTAshield®  yellow/smoke, vented	<b>AMC170-003-K00</b>	EVO® VISTAshield®  yellow/smoke, non-vented
<b>AMD170-006-P00</b>	EVO® VISTAshield®  green/smoke, vented	<b>AMC170-006-P00</b>	EVO® VISTAshield®  green/smoke, non-vented
<b>AMD170-007-F00</b>	EVO® VISTAshield®  blue/smoke, vented	<b>AMC170-007-F00</b>	EVO® VISTAshield®  blue/smoke, non-vented
<b>AMD170-008-K00</b>	EVO® VISTAshield®  red/smoke, vented	<b>AMC170-008-K00</b>	EVO® VISTAshield®  red/smoke, non-vented
<b>AMD170-00M-900</b>	EVO® VISTAshield®  orange/smoke, vented	<b>AMC170-00M-900</b>	EVO® VISTAshield®  orange/smoke, non-vented
<b>AMD170-006-J00</b>	EVO® VISTAshield®  black/smoke, vented		


Also available in DualSwitch™ (EN 397 & EN 12492)

**EVO® VISTAsield® LINESMAN**  
 FITTED WITH EN 397 LINESMAN CHINSTRAP,  
 ID CARD HOLDER & LAMP BRACKET  
 EN 397, EN 50365, EN 166, EN 170




<b>AMD249-M05-F00</b>	EVO® VISTAsield® Linesman ■■ white/smoke, vented, Linesman 4-point chinstrap, ID card holder, lamp bracket, CR2
<b>AMD247-T05-F00</b>	EVO® VISTAsield® Linesman ■■ white/smoke, vented, Linesman 4-point chinstrap, ID card holder, lamp bracket

## EVO® VISTAlens® VISIONARY PROTECTION



EVO® VISTAlens® is a next generation safety helmet incorporating a fully retractable optical class 1 integrated overspec offering impact and UV protection. The eyewear is easy to deploy, adjust and maintain, ensuring protection is on hand whenever it is required.

Also available in DualSwitch™ (EN 397 & EN 12492) and Skyworker™ (EN 12492) versions.



Non-vented only

**EVO® VISTAlens®**  
 EN 397, EN 50365, EN 166, EN 170



<b>AMB170-005-F00</b>	EVO® VISTAlens® ■■ white/smoke, vented	<b>AMA170-005-F00</b>	EVO® VISTAlens® ■■ white/smoke, non-vented
<b>AMB170-007-800</b>	EVO® VISTAlens® ■■ yellow/smoke, vented	<b>AMA170-007-800</b>	EVO® VISTAlens® ■■ yellow/smoke, non-vented
<b>AMB170-006-P00</b>	EVO® VISTAlens® ■■ green/smoke, vented	<b>AMA170-006-P00</b>	EVO® VISTAlens® ■■ green/smoke, non-vented
<b>AMB170-007-F00</b>	EVO® VISTAlens® ■■ blue/smoke, vented	<b>AMA170-007-F00</b>	EVO® VISTAlens® ■■ blue/smoke, non-vented
<b>AMB170-008-K00</b>	EVO® VISTAlens® ■■ red/smoke, vented	<b>AMA170-008-K00</b>	EVO® VISTAlens® ■■ red/smoke, non-vented
<b>AMB170-00M-900</b>	EVO® VISTAlens® ■■ orange/smoke, vented		
<b>AMB170-006-J00</b>	EVO® VISTAlens® ■■ black/smoke, vented		

**EVO® VISTAlens® LINESMAN**  
 FITTED WITH EN 397 LINESMAN CHINSTRAP,  
 EN 397, EN 50365, EN 166, EN 170



<b>AMB240-005-F00</b>	EVO® VISTAlens® Linesman ■■ white/smoke, vented, 4-point chinstrap	<b>AMB240-007-F00</b>	EVO® VISTAlens® ■■ blue/smoke, vented, 4-point chinstrap
<b>AMB240-007-800</b>	EVO® VISTAlens® ■■ yellow/smoke, vented, 4-point chinstrap	<b>AMB240-008-K00</b>	EVO® VISTAlens® ■■ red/smoke, vented, 4-point chinstrap

**EVO® VISTAlens®**  
 WITH ID CARD HOLDER AND LAMP BRACKET  
 EN 397, EN 166, EN 170



<b>AMB177-T05-F00</b>	EVO® VISTAlens® ■■ white/smoke, vented, ID card holder, lamp bracket	<b>AMB177-T08-K00</b>	EVO® VISTAlens® ■■ red/smoke, vented, ID card holder, lamp bracket
<b>AMB177-T07-800</b>	EVO® VISTAlens® ■■ yellow/smoke, vented, ID card holder, lamp bracket	<b>AMB177-T0M-900</b>	EVO® VISTAlens® ■■ orange/smoke, vented, ID card holder, lamp bracket
<b>AMB177-T07-F00</b>	EVO® VISTAlens® ■■ blue/smoke, vented, ID card holder, lamp bracket		

# EVOLite® JSP'S LIGHTEST SAFETY HELMET



The EVOLite® is designed to be as lightweight as possible whilst providing the high level of protection expected from JSP safety helmets. EVOLite® features a textile cradle with 3D-Adjustment to enable a precise, secure fit. Available with OneTouch™ slip ratchet or the new Revolution® Flex wheel ratchet harness.



<b>EVOLite® - REVOLUTION® FLEX WHEEL RATCHET</b> MID PEAK EN 397, EN 50365 (non-vented)			
<b>AJB170-00-__00</b> EVOLite® - mid peak, wheel ratchet, vented		<b>AJA170-00-__00</b> EVOLite® - mid peak, wheel ratchet, non-vented	

Replace dashes with colour code: **01 02 03 04 05 06 08 11** Extra Visibility: **C7**

Replace dashes with colour code: **01 02 05**

<b>EVOLite® - REVOLUTION® FLEX WHEEL RATCHET</b> MID PEAK, CR2 EN 397, EN 50365 (non-vented)			
<b>AJB170-40-__00</b> EVOLite® - mid peak, wheel ratchet, vented, CR2		<b>AJA170-40-__00</b> EVOLite® - mid peak, wheel ratchet, non-vented, CR2	

Replace dashes with colour code: **01 02 03 04 05 06 08 11** Extra Visibility: **C7**

Replace dashes with colour code: **01 02 05**

<b>EVOLite® - REVOLUTION® FLEX WHEEL RATCHET</b> MICRO PEAK EN 397, EN 50365 (non-vented)			
<b>AJD170-00-__00</b> EVOLite® - micro peak, wheel ratchet, vented		<b>AJC170-00-__00</b> EVOLite® - micro peak, wheel ratchet, non-vented	

Replace dashes with colour code: **01 02 05**

Replace dashes with colour code: **01 02 05**

# EVOLite® WITH PRE-FITTED EN 397 LINESMAN CHINSTRAP

The EVOLite® helmet is available with a Linesman chinstrap to provide greater security. Also available in Skyworker™ version (EN 12492).

<b>EVOLite® - REVOLUTION® FLEX WHEEL RATCHET - LINESMAN</b> MID PEAK, FITTED WITH EN 397 LINESMAN CHINSTRAP EN 397, EN 50365 (non-vented)			
<b>AJB240-00-__00</b> EVOLite® Linesman - mid peak, wheel ratchet, vented		<b>AJA240-00-__00</b> EVOLite® Linesman - mid peak, wheel ratchet, non-vented	

Replace dashes with colour code: **01 02 03 04 05 06 08 11** Extra Visibility: **C7**

Replace dashes with colour code: **01 02 05**

**EVOLite® - REVOLUTION® FLEX WHEEL RATCHET - LINESMAN**

MICRO PEAK, FITTED WITH EN 397 LINESMAN CHINSTRAP  
EN 397, EN 50365 (non-vented)



AJD240-00-\_\_00 EVOLite® Linesman - micro peak, wheel ratchet, vented

AJC240-00-\_\_00 EVOLite® Linesman - micro peak, wheel ratchet, non-vented

Replace dashes with colour code: 01 02 05

**EVOLite® WITH ONETOUCH™ SLIP RATCHET**

**EVOLite® - ONETOUCH™ SLIP RATCHET**

MID PEAK  
EN 397



AJB160-00-\_\_00 EVOLite® - mid peak, slip ratchet, vented

Replace dashes with colour code: 01 02 03 04 05 06 08 11

**EVOLite® - ONETOUCH™ SLIP RATCHET**

MID PEAK, CR2  
EN 397



AJB160-40-\_\_00 EVOLite® - mid peak, slip ratchet, vented, CR2

Replace dashes with colour code: 01 02 03 04 05 06 08 11

**EVOLite® - ONETOUCH™ SLIP RATCHET**

MICRO PEAK  
EN 397



AJD160-000-100 EVOLite® - micro peak, slip ratchet, white, vented

**EVO® 6100 FULL BRIM PROTECTION**



EVO® 6100 features a full brim shell fitted with the Evolution®3D-Adjustment harness system and Revolution® wheel ratchet, enabling easy adjustment using one hand in a single swift movement.



**EVO® 6100 - REVOLUTION® FLEX WHEEL RATCHET**

FULL BRIM  
EN 397, EN 50365, ANSI / ISEA Z89.1




AJP170-000-100 EVO®6100 Full Brim - white

# EVO<sup>®</sup>3 COMFORT & PERFORMANCE



EVO<sup>®</sup>3 combines a tough HDPE shell and textile harness to provide comfortable all-day protection. The Evolution<sup>®</sup> 3D-Adjustment system enables a precise fit, available with OneTouch<sup>™</sup> slip ratchet or intuitive Revolution<sup>®</sup> wheel ratchet for easy one-handed operation.



**EVO<sup>®</sup>3 - REVOLUTION<sup>®</sup> WHEEL RATCHET**  
MID PEAK  
EN 397, EN 50365 (non-vented)

AJF170-00\_ \_00 EVO<sup>®</sup>3 - mid peak, wheel ratchet, vented

AJE170-00\_ \_00 EVO<sup>®</sup>3 - mid peak, wheel ratchet, non-vented

Replace dashes with colour code: 01 02 03 04 05 06 08 11

Replace dashes with colour code: 01 02 03 04 05 06 08 11

**EVO<sup>®</sup>3 - REVOLUTION<sup>®</sup> WHEEL RATCHET**  
MICRO PEAK  
EN 397

AJH170-00\_ \_00 EVO<sup>®</sup>3 - micro peak, wheel ratchet, vented

Replace dashes with colour code: 01 02 05

**EVO<sup>®</sup>3 MINERS - REVOLUTION<sup>®</sup> WHEEL RATCHET**  
MID PEAK  
EN 397

AJE179-400-100 EVO<sup>®</sup>3 Miners with Trifix lamp bracket + cable loop, mid peak, wheel ratchet, non-vented, CR2

AJE179-30\_ \_00 EVO<sup>®</sup>3 Miners with Trifix lamp bracket + cable loop, mid peak, wheel ratchet, non-vented

Replace dashes with colour code: 01 02 03 06 08

# EVO<sup>®</sup>3 WITH ONETOUCH<sup>™</sup> SLIP RATCHET

**EVO<sup>®</sup>3 - ONETOUCH<sup>™</sup> SLIP RATCHET**  
MID PEAK  
EN 397, EN 50365 (non-vented)

AJF160-00\_ \_00 EVO<sup>®</sup>3 - mid peak, slip ratchet, vented

AJE160-00\_ \_00 EVO<sup>®</sup>3 - mid peak, slip ratchet

Replace dashes with colour code: 01 02 03 04 05 06 08 11

Replace dashes with colour code: 01 02 03 04 05 06 08 11

**EVO<sup>®</sup>3 MINERS - ONETOUCH<sup>™</sup> SLIP RATCHET**  
MID PEAK  
EN 397

AJE169-30\_ \_00 EVO<sup>®</sup>3 Miners - mid peak, slip ratchet, non-vented

Replace dashes with colour code: 01 02 03 04 05 06 08 11

# EVO<sup>®</sup>2 ECONOMY & PERFORMANCE



EVO<sup>®</sup>2 features a traditional 6-point LDPE cradle harness and tough HDPE shell. The helmet offers a precise fit with an Evolution<sup>®</sup> 3D-Adjustment system and easy-to-use OneTouch<sup>™</sup> slip ratchet.



## EVO<sup>®</sup>2 - ONETOUCH<sup>™</sup> SLIP RATCHET

MID PEAK  
EN 397, EN 50365 (non-vented)



AJF030-00-00 EVO<sup>®</sup>2 - mid peak, slip ratchet, vented

AJE030-00-00 EVO<sup>®</sup>2 - mid peak, slip ratchet, non-vented

Replace dashes with colour code: 01 02 05 08 11

Replace dashes with colour code: 01 02 05

## EVO<sup>®</sup>2 BADGE - ONETOUCH<sup>™</sup> SLIP RATCHET

MID PEAK  
EN 397



APB030-000-100 EVO<sup>®</sup>2 Badge - mid peak, slip ratchet, white, vented

# MK<sup>®</sup>7.0 CLASSIC SHELL DESIGN



Mk<sup>®</sup>7.0 is designed with a classic shell incorporating a rain channel, retaining the style of traditional industrial safety helmets while offering the latest performance features. The textile harness provides a comfortable secure fit with 3D-Adjustment depth settings and intuitive Revolution<sup>®</sup> wheel ratchet.



## MK<sup>®</sup>7.0 - REVOLUTION<sup>®</sup> WHEEL RATCHET

LONG PEAK  
EN 397, EN 50365



AHM170-000-100 Mk<sup>®</sup>7.0 - long peak, non-vented

















# EN 12492

# MOUNTAINEERING & WORKING AT HEIGHT SAFETY HELMETS

A helmet complying to the mountaineering standard is impact tested with two 5kg strikers. A hemispherical striker is dropped from 2m onto the crown of the helmet and a flat striker from 0.5m on to the front, rear and side by tilting the headform 60° to

the vertical. In all cases, the transmitted force must not exceed 10kN. Two penetration tests are performed using a 3kg pointed striker dropped from a height of 1m within a 50mm radius of the helmet's crown.

## QUICK REFERENCE & SELECTION GUIDE

	STANDARDS	HELMET TESTING & PERFORMANCE						
		Crown impact resistance	Side impact resistance	Crown penetration	LD - lateral deformation	Electrical protection	MM - molten metal	Operational temperature range
EN 12492	 <p><b>EVO® ALTA™ SKYWORKER™</b> Page 31</p> <p>EN 12492 *EN 397 **EN 50365</p>	 98.4 Joules	 25.5 Joules	 29 Joules	 LD*	 1000V*	 MM*	 +50°C -40°C
	 <p><b>EVO Lite® SKYWORKER™</b> Page 32</p> <p>EN 12492 *EN 397 **EN 50365</p>	 98.4 Joules	 25.5 Joules	 29 Joules	 LD*	 1000V*	 MM*	 +50°C -40°C

## EVO® ALTA™ SKYWORKER™ HIGH PERFORMANCE HEAD PROTECTION



The new EVO® ALTA™ offers all-round impact protection. The mountaineering-style helmet features a specialised shell structure and internal EPP liner to increase durability and shock absorption performance. Precise adjustment settings enable a secure fit, ensuring the helmet remains stable.

EVO® ALTA™ is also available in Baseworker™ (EN 397) and DualSwitch™ (EN 397 & EN 12492) versions.



EVO® ALTA™ SKYWORKER™  
FITTED WITH EN 12492 SKYWORKER™ CHINSTRAP  
EN 12492, EN 397\*, EN 50365\*\*



ARC170-00\_ \_ 00 EVO®ALTA™ Skyworker™, Vented

Replace dashes with colour code: 01 04 05 11 Extra Visibility: C7 16

Chinstraps are mandatory for EN 12492 helmets. Testing is carried out to ensure the strap does not break or stretch when a force of 500N is applied. This is designed to keep the helmet secure in case of repeated impacts from swinging or multiple falling objects.

Though the standard refers to 'mountaineering' helmets, EN 12492 helmets are also used for other work at height due to the type of protection offered.

SHELL			HARNES			OPTIONS & GENERAL FEATURES						
Helmet material	Internal liner	Recyclable	Textile	Depth adjustment	Wheel ratchet	Ventilated	CR2 reflective	Integrated eyewear	ID card holder	Chinstrap	Lamp bracket & cable loop	Weight
ABS	EPP					As standard	Optional	-	Optional	4-pt as standard	-	500g
ABS	EPS					As standard	Optional	-	Optional	4-pt as standard	-	382g

\*Meets shock absorption, penetration, lateral deformation, and molten metal requirements. \*\*Meets electrical requirements.

## EVOLite® SKYWORKER™ THE SKY'S THE LIMIT



The EVOLite® Skyworker™ suspension system and shell structure are designed for industrial, mountaineering, rescue and leisure activities, with a lightweight EPS liner, 4-point chinstrap and 3D-Adjustment system.



EVOLite® SKYWORKER™  
FITTED WITH EN 12492 SKYWORKER™ CHINSTRAP  
EN 12492, EN 397\*, EN 50365\*\*



































AJS260-00\_ \_00 EVOLite® Skyworker™, Vented

Replace dashes with colour code: 01 02 05 08 11

EN 397  
EN 12492









































# DUAL STANDARD SAFETY HELMETS



## QUICK REFERENCE & SELECTION GUIDE

		STANDARDS	HELMET TESTING & PERFORMANCE							
			Crown impact resistance	Side impact resistance	Crown penetration	LD - lateral deformation	Electrical protection	MM - molten metal	Operational temperature range	
EN 12492 SWITCH DOWN	EN 397 SWITCH UP	<b>EVO® ALTA™ DUALSWITCH™</b> Page 35 	EN 12492 EN 397 EN 50365	 98.4 Joules	 25.5 Joules	 29 Joules	 LD	 1000V	 MM	 +50°C -40°C
		<b>EVO® VISTAshield® DUALSWITCH™</b> Page 35 	EN 12492 EN 397 EN 50365 AS/NZS 1801 EN 166 EN 170	 98.4 Joules	 25.5 Joules	 29 Joules	 LD	 1000V	 MM	 +50°C -40°C
		<b>EVO® VISTA lens® DUALSWITCH™</b> Page 36 	EN 12492 EN 397 EN 50365 AS/NZS 1801 EN 166 EN 170	 98.4 Joules	 25.5 Joules	 29 Joules	 LD	 1000V	 MM	 +50°C -40°C
		<b>EVO® 5 DUALSWITCH™</b> Page 36 	EN 12492 EN 397 EN 50365 ANSI/ISEA Z89.1 AS/NZS 1801	 98.4 Joules	 25.5 Joules	 29 Joules	 LD	 1000V	 MM	 +50°C -40°C

## DUALSWITCH™ EXPLAINED

JSP's DualSwitch™ technology is fully certified to both [EN 12492](#) and [EN 397](#) offering the ability to change between the two standards easily at the flick of a switch. Initially developed for the EVO®5 and later rolled out to EVO® VISTA® & EVO® ALTA™ helmet ranges, the innovative system enables selection of release force without swapping the chinstrap.

EYEWEAR TESTING & PERFORMANCE						SHELL			HARNES			OPTIONS & GENERAL FEATURES						
Ultraviolet filter scale number	Impact rating	Operational temperature range	Optical class	Anti-mist Anti-scratch	Visible light transmittance	Helmet material	Internal liner	Recyclable	Textile	Depth adjustment	Wheel ratchet	Ventilated	CR2 reflective	Integrated eyewear	ID card holder	Chinstrap	Lamp bracket & cable loop	Weight
												As standard	Optional		Optional	As standard		500g
 2C-1.2		 +55°C -5°C		 	 VLT 90%							As standard	Optional	As standard	Optional	As standard		610g
 2C-1.2		 +55°C -5°C		 	 VLT 90%							As standard	Optional	As standard	Optional	As standard		584g
												As standard	Optional		Optional	As standard		450g

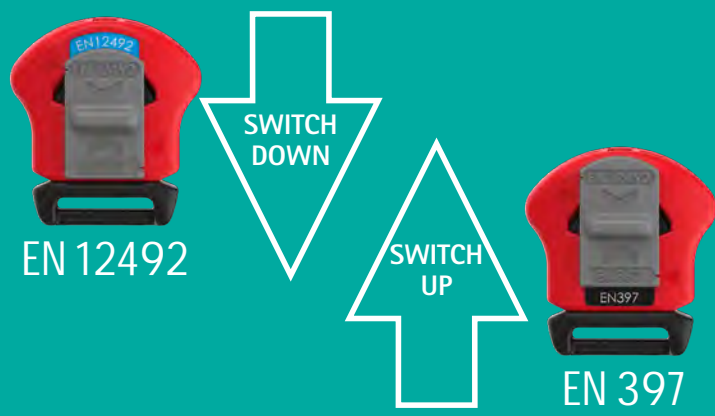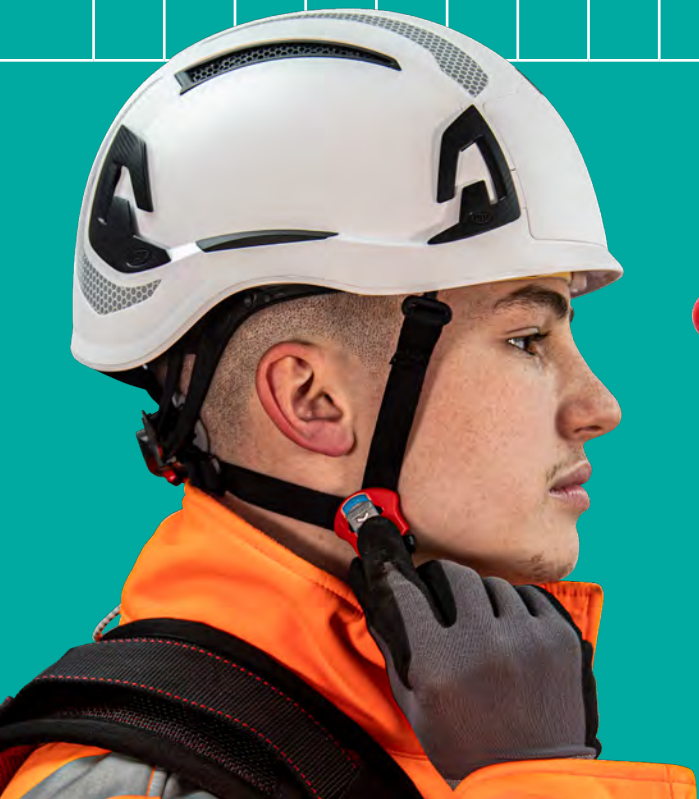

# EVO® ALTA™ DUALSWITCH™ TWO STANDARDS ONE SWITCH



The new EVO® ALTA™ offers all-round impact protection. The mountaineering-style helmet features a specialised shell structure and internal liner to increase durability and shock absorption performance. Precise adjustment settings enable a secure fit, ensuring the helmet remains stable.

EVO® ALTA™ is also available in Baseworker™ (EN 397) and Skyworker™ (EN 12492) versions.



\*When switched to EN 397 mode




EVO® ALTA™ DUALSWITCH™  
FITTED WITH EN 12492 & EN 397 DUALSWITCH™ CHINSTRAP  
EN 12492, EN 397, EN 50365\*



ARD170-40-\_00 EVO®ALTA™ Dualswitch™ - vented

Replace dashes with colour code: **01** **05** **11** Extra Visibility: **C7** **16**

# EVO® VISTAshield® DUALSWITCH™ TWO STANDARDS ONE SWITCH



EVO® VISTAshield® DUALSWITCH™ combines the new EVO® VISTA® retractable eyewear helmet technology with the innovative DUALSWITCH™ chinstrap harness system, making it simple to change between working at ground level and working at height safety standards. The faceshield offers A-rated impact protection - tested with 6mm steel ball bearing at speeds of up to 425mph (685kph).

EVO® VISTAshield® is also available in EN 397 and Skyworker™ (EN 12492) versions.



\*When switched to EN 397 mode




EVO® VISTAshield® DUALSWITCH™  
FITTED WITH EN 12492 & EN 397 DUALSWITCH™ CHINSTRAP  
EN 12492, EN 397, EN 50365\*, EN 166, EN 170



AMH270-405-F00	EVO® VISTAshield® ■ white/smoke, vented	AMH270-40M-900	EVO® VISTAshield® ■ orange/smoke, vented
AMH270-407-800	EVO® VISTAshield® ■ yellow/smoke, vented	AMH270-406-J00	EVO® VISTAshield® ■ black/smoke, vented
AMH270-406-P00	EVO® VISTAshield® ■ green/smoke, vented		
AMH270-408-K00	EVO® VISTAshield® ■ red/smoke, vented	AMH270-409-H00	EVO® VISTAshield® ■ extra vis yellow/smoke, vented

# EVO® VISTAlens® DUALSWITCH™ TWO STANDARDS ONE SWITCH



EVO® VISTAlens® DUALSWITCH™ combines the new EVO® VISTA® retractable eyewear helmet technology with the innovative DUALSWITCH™ chinstrap harness system, making it simple to change between working at ground level and working at height safety standards. The safety lens offers B-rated impact protection - tested with 6mm steel ball bearing at speeds of up to 270mph (435kph).

EVO® VISTAlens® is also available in EN 397 and Skyworker™ (EN 12492) versions.



\*When switched to EN 397 mode



EVO® VISTAlens® DUALSWITCH™  
FITTED WITH EN 12492 & EN 397 DUALSWITCH™ CHINSTRAP  
EN 12492, EN 397, EN 50365\*, EN 166, EN 170



- AMF270-405-F00 EVO® VISTAlens® ■■ white/smoke, vented
- AMF270-406-P00 EVO® VISTAlens® ■■ green/smoke, vented
- AMF270-407-F00 EVO® VISTAlens® ■■ blue/smoke, vented
- AMF270-408-K00 EVO® VISTAlens® ■■ red/smoke, vented
- AMF270-40M-900 EVO® VISTAlens® ■■ orange/smoke, vented

- AMF270-406-J00 EVO® VISTAlens® ■■ black/smoke, vented
- AMF270-409-H00 EVO® VISTAlens® ■■ extra vis yellow/smoke, vented
- AMF270-401-J00 EVO® VISTAlens® ■■ extra vis orange/smoke, vented

# EVO® 5 DUALSWITCH™ TWO STANDARDS ONE SWITCH



The EVO® 5 DualSwitch™ is fully certified to both EN 397 and EN 12492, with the ability to change between the two standards easily at the flick of a switch. The helmet combines the strong ABS shell of the EVO® 5 Olympus® helmet with the innovative DualSwitch™ system to deliver a helmet that can be used at ground level (EN 397) or at height (EN 12492).



\*When switched to EN 397 mode



EVO® 5 DUALSWITCH™  
FITTED WITH EN 12492 & EN 397 DUALSWITCH™ CHINSTRAP  
EN 12492, EN 397, EN 50365\*



- AKS270-000-100 EVO® 5 DualSwitch™ - white, vented

EN 14052

HIGH PERFORMANCE  
SAFETY HELMETS

The EN 14052 high performance helmet standard specifies testing for side impact and penetration protection. The shell is subjected to a total of 150J of impact energy, 100J to the top of the helmet and 50J to the side (up to 60° from the crown). Penetration testing is conducted with a 1kg blade striker dropped from 2.5m on top of the helmet, and from 2m on to the side.

Additional optional requirements include molten metal resistance and 440V electrical insulation.

Chinstraps are optional for EN 14052 helmets and must release under a force of 150-250N for safety in case the strap becomes caught on something.

EVO® 8  
JSP'S STRONGEST INDUSTRIAL SAFETY HELMET

The Mk8 Evolution® was the first industrial hard hat to achieve the EN 14052 high performance helmet standard – the greatest advance in industrial head protection for over 45 years. Designed for today's highest risk environments, where hazards include intense side-on impacts, the EVO®8 provides protection for heavy construction, demolition, mining, tunnelling, oil & gas, refinery & petrochemical, offshore marine, high-pressure jetting, and certain emergency services.



Non-vented only

EVO® 8 INDUSTRIAL  
EN 14052

AHU150-000-100 EVO®8 Industrial, vented



AHS150-000-100

EVO®8 Industrial, non-vented

EVO® 8 LINESMAN  
FITTED WITH EN 397 LINESMAN CHINSTRAP  
EN 14052

AHU240-000-100 EVO®8 Linesman, vented

AHS240-000-100 EVO®8 Linesman, non-vented



# EN 397

# INDUSTRIAL SAFETY HELMET SYSTEMS

## EVOGUARD® M FORESTRY HELMET SYSTEMS



The EVOGuard®M Forestry helmet system and replacement forestry visors offer a host of features designed in-house by the JSP R&D team. Developed over three years, EVOGuard® maximises compatibility for optimum comfort and protection levels with simple, effortless maintenance.



### EVOGUARD® M2 FORESTRY HELMET SYSTEM

EN 397, EN 166, EN 1731, EN 352-3



EVOGuard®M2

AKE24A-400-800

EVOGuard®M2 Forestry Helmet System



### EVOGUARD® M3 FORESTRY HELMET SYSTEM

EN 397, EN 166, EN 1731, EN 352-3



EVOGuard®M3

AKE24A-500-800

EVOGuard®M3 Forestry Helmet System

AKE24E-200-800

EVOGuard®M3 Forestry Helmet System with throat cover and neck cape

## EVOGuard® C5 MAX ELECTRICAL HELMET SYSTEM



The EVOGuard® C5 MAX Helmet System combines the EVO®5 Olympus® global industrial safety helmet with the EVOGuard® C5 MAX visor, offering Class 1 arc protection. The panoramic visor provides A-rated impact resistance, UV filtering and K&Tn anti-scratch, anti-mist properties.

### EVOGuard® C5 MAX ELECTRICAL HELMET SYSTEM

EN 166, EN 170, GS-ET-29, EN 397, EN 50365



EN 50365  
ELECTRICAL PROTECTION TO 1000V

AKE24C-600-100

EVOGuard®C5 MAX Electrical Helmet System

⚠ Should be worn as part of a complete arc flash ensemble.

# JSP LOGO EXPRESS<sup>®</sup>

## CLEAR AND SIMPLE BRANDING

### 1 SELECT PRODUCT

Choose your helmet / cap model, colour and where you want your logo to be printed. Select front, back, sides or any combination.

### 2 SUPPLY ARTWORK

Email logo design artwork to [logos@jsp-safety.com](mailto:logos@jsp-safety.com), preferably Adobe Illustrator .ai or .eps files as well as a JPEG file. Other file types are accepted, however these may incur additional set-up charges.

### 3 APPROVE PROOFS

JSP will provide colour proofs via email. Confirm your order by contacting [logos@jsp-safety.com](mailto:logos@jsp-safety.com), alternatively state any amendments that you require. Minimum order quantities apply\*.

For delivery lead-times, Minimum Order Quantities and other supply related terms and conditions, please visit [www.jsp-safety.com](http://www.jsp-safety.com) or contact JSP Customer Service.

















# HELMETS

						 
FRONT	 80mm x 35mm	 100mm x 35mm	 80mm x 35mm	 80mm x 35mm	 75mm x 50mm	 80mm x 35mm
BACK	 50mm x 30mm	 Upper: 35mm x 20mm Lower: 60mm x 35mm	 Upper: 35mm x 20mm Lower: 60mm x 35mm			 35mm x 20mm
SIDES	 60mm x 30mm	 40mm x 25mm	 60mm x 20mm	 60mm x 30mm	 80mm x 30mm	 60mm x 30mm

Minimum order quantities apply

# BUMP CAPS

	EMBROIDERY	
		
FRONT	 40mm x 90mm	 40mm x 90mm
BACK	 40mm x 82mm	 40mm x 40mm

	HEAT TRANSFER	
		
FRONT	 40mm x 90mm	 40mm x 90mm
BACK	 40mm x 80mm	 40mm x 40mm
SIDES	 25mm x 25mm	 25mm x 25mm

Minimum Order Quantity (MOQ) 60 for heat transfer and embroidery.  
Please note: Rear heat transfer / embroidery area varies for HardCap™ A1+ and HardCap Aerolite®.

# SONIS® MOUNTED EAR DEFENDERS



Sonis® Mounted ear defenders are fully adjustable and offer certified compatibility with JSP EVO® helmets and EVOGuard® browguards. Designed to fit with a range of visor systems for combined protection, Sonis® provide comfortable, high-performance attenuation.

Certified compatible with:




**SONIS® 1**  
MOUNTED EAR DEFENDERS  
EN 352-3, SNR=26

**sonis 1**  
SNR 26

Frequency (Hz) H = 32 M = 23 L = 15

SNR=26

- AEB010-0CY-800 Sonis®1 Mounted Ear Defenders
- AEB800-000-300 Sonis®1 hygiene kit

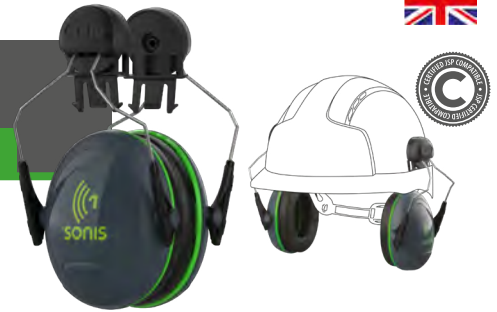

Certified compatible with:


**SONIS® COMPACT**  
MOUNTED EAR DEFENDERS  
EN 352-3, SNR=31

**sonis COMPACT**  
SNR 31

Frequency (Hz) H = 35 M = 28 L = 20

SNR=31

- AEB030-0CY-000 Sonis®C Mounted Ear Defenders
- AEB820-000-800 Sonis®C hygiene kit

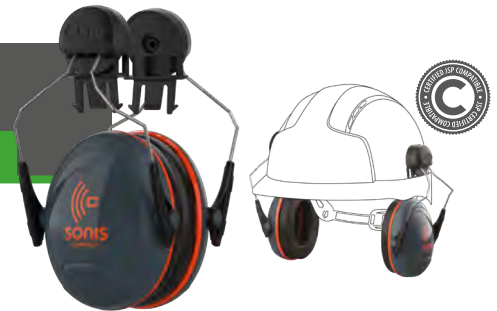

Certified compatible with:

**SONIS® COMPACT**  
FULL BRIM MOUNTED  
EAR DEFENDERS  
EN 352-3, SNR=31

**sonis COMPACT**  
SNR 31

Frequency (Hz) H = 35 M = 28 L = 20

SNR=31

- AEB030-0DY-000 Sonis®C Full Brim Mounted Ear Defenders
- AEB820-000-800 Sonis®C hygiene kit



Certified compatible with:


**SONIS® 3** MOUNTED  
EAR DEFENDERS  
EN 352-3, SNR=36

**sonis 3**  
SNR 36

Frequency (Hz) H = 37 M = 35 L = 26

SNR=36

- AEB040-0C1-A00 Sonis®3 Mounted Ear Defenders
- AEB830-000-600 Sonis®3 hygiene kit

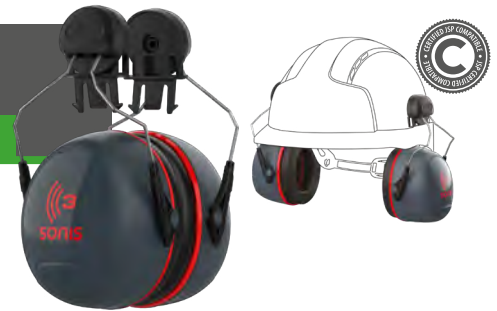

		MOUNTED
EN STANDARD		EN 352-3
WEIGHT	Sonis®1	280g +/-5g
	Sonis®C	260g +/-5g
	Sonis®3	380g +/-5g
MATERIALS	Cups/Plate	ABS
	Attachment arm	Steel, acetal & nylon
	Pivot Arm	Acetal, Steel
	Sealing ring	PET-G plate, TPU skin, Foamed Polymer
	Inner foam	Polyurethane foam



Sonis® mounted ear defenders are tested in combination with JSP helmets and the EVOGuard® browguard, ensuring the correct level of hearing protection with each model, for certified compatibility.

# EVOGuard<sup>®</sup>M FORESTRY VISOR RANGE



Three high performance forestry visors are available, enabling users to select the perfect visor for their task and price point. Visors are fully compatible with EVOGuard<sup>®</sup> browguard systems and EVO<sup>®</sup> helmets.

Available for:



## VISOR SPECIFICATIONS

		EN 1731	S - Increased Robustness	F - Low Energy Impact (45m/s)	Frame Material	Visible Light Transmittance	Visor Material	Weight (g)
 ADA290-080-000	 Visor Length 180mm 7.4"	<input checked="" type="checkbox"/>			ABS Overmoulded frame		Woven Nylon Mesh	65g
 ADA300-080-000	 Visor Length 180mm 7.4"	<input checked="" type="checkbox"/>			ABS Overmoulded frame		Woven Stainless Steel Mesh	75g
 ADA310-080-000 ADA310-080-00C EVO <sup>®</sup> VISTA <sup>®</sup> Compatible	 Visor Length 180mm 7.4"	<input checked="" type="checkbox"/>			ABS Overmoulded frame		Etched Stainless Steel Mesh	86g

# EVOGuard<sup>®</sup>C INDUSTRIAL VISOR RANGE



Five high performance industrial visors are available, enabling users to select the perfect visor for their task and price point. Visors are fully compatible with EVOGuard<sup>®</sup> browguard systems and EVO<sup>®</sup> helmets.

Available for:



## VISOR SPECIFICATIONS

		EN 170	EN 166										*GS-ET-29	Increased Chemical Resistance	Visor Material	Weight (g)			
		2C - 1, 2 - UV Filter with Enhanced Colour Recognition	A - High Energy Impact (190m/s)	B - Medium Energy Impact (120m/s)	T - High Speed Particles at Extreme Temperatures	1 - Optical Class	3 - Liquid droplets Et splash	9 - Molten Metals	K - Anti Scratch	N - Anti Mist	8 - Short Circuit Electric Arc	1 - Fault Arc Class	0 - Visible Light Transmittance						
 ADA240-060-000	 Visor Length 185mm 7.5"																Polycarbonate Clear Visor	185g	
 ADA250-060-000																		Polycarbonate Clear Visor	185g
 ADA260-070-000 ADA260-070-00C EVO <sup>®</sup> VISTA <sup>®</sup> Compatible	 Visor Length 215mm 8.5"													<input checked="" type="checkbox"/>			Co-Polyester Clear Visor	232g	
 ADA270-070-000 ADA270-070-00C EVO <sup>®</sup> VISTA <sup>®</sup> Compatible																		Polycarbonate Clear Visor	216g
 ADA280-070-000 ADA280-070-00C EVO <sup>®</sup> VISTA <sup>®</sup> Compatible																		Polycarbonate Clear Visor	216g

HM = Helmet mounted. BM = Browguard mounted \*Only applicable when combined with EVO safety helmet, arc flash protection not available with browguard system.

# AFP-25 FACESHIELD - ARC FLASH PROTECTION

Designed to provide the ultimate in industrial-grade arc flash eye and face protection, the AFP-25 faceshield meets GS-ET-29 Class 2 with an ATPV rating of 25cal/cm<sup>2</sup> under ASTM F2178.



Available for:

Available for:

**AFP-25 HELMET MOUNTED FACESHIELD**  
EN 166, EN 170, GS-ET-29



**AFF122-440-408** AFP-25 Helmet Mounted Faceshield

**AFP-25 HELMET MOUNTED FACESHIELD**  
With weight balancing system  
EN 166, EN 170, GS-ET-29



**AFF132-440-408** AFP-25 Helmet Mounted Faceshield with weight balancing system

Should be worn as part of a complete arc flash ensemble.

## EVO® VISTAlens® REPLACEMENT CLEAR LENS

Replacement clear anti-scratch, anti-mist (KN) lens for EVO® VISTAlens® helmet.

**EVO® VISTAlens® REPLACEMENT CLEAR LENS - B-RATED**  
EN 166, EN 170




**AMV250-000-000** EVO® VISTAlens® replacement clear eyeshield – B-Rated

## EVO® VISTAlens® REPLACEMENT INDOOR/OUTDOOR LENS

Replacement Indoor / Outdoor anti-scratch, anti-mist (KN) lens for EVO® VISTAlens® helmet.

**EVO® VISTAlens® REPLACEMENT CLEAR INDOOR/OUTDOOR LENS - B-RATED**  
EN 166, EN 172



**AMV150-000-000** EVO® VISTAlens® replacement indoor/outdoor eyeshield – B-Rated

## EVO® VISTAshield® REPLACEMENT CLEAR FACESHIELD

Replacement clear anti-scratch, anti-mist (KN) shield for EVO® VISTAshield® helmet.

**EVO® VISTAshield® REPLACEMENT CLEAR FACESHIELD - A-RATED**  
EN 166, EN 170



**AMV200-000-000** EVO® VISTAshield® replacement faceshield – A-Rated

## EVOSPEC® RETRACTABLE EYESHIELD


Easy assembly polycarbonate retractable eyeshield for JSP helmets\* & Browguards.

\* Not available for EVO Lite® Skyworker™, EVO® Vista® DUALSWITCH™, EVO®5 DUALSWITCH™ & EVO®Alta™



Available for:

**EVOSPEC® RETRACTABLE EYESHIELD - F-RATED**  
EN 166, EN 170, EN 172



**ANT010-200-000** EVOSpec® - clear 2C-1.2 1 FT N

**ANT120-200-000** EVOSpec® - smoke 5-2.5 1 FT N

## HELMET ID CARD HOLDERS

A range of identification card holders that can be retrofitted to compatible helmet types.



**EVO® ALTA™  
ID CARD HOLDER**

AHV550-000-111 EVO® ALTA™ ID card holder



**EVO® ALTA™  
REPLACEMENT FRONT COVER**

AHV550-00-00 EVO® ALTA™ front cover

Replace dashes with colour code: **01** **03** **04** **05** **06** **11** Extra visibility **16** **C7**



**EVO® VISTA®  
HELMET ID CARD HOLDER**

AHV600-000-000 EVO® VISTA® helmet ID card holder - snap on




**EVO Lite®  
HELMET ID CARD HOLDER**







AHV800-000-000 EVO Lite® helmet ID card holder - snap on

## CHINSTRAPS

A range of chinstraps for JSP safety helmets, enabling users to adapt the helmet to suit different tasks. Chinstraps are simple to fit, supplied with detailed fitting information and access to instructional videos.

Wide elastic chinstrap that releases automatically at forces between 150 Et 250 Newtons. The deluxe version features a chin-cup.



Available for:      

**ELASTIC CHINSTRAPS**  
EN 397, EN 14052

AHV000-500-000 Deluxe chinstrap with chin-cup

AHV001-100-000 Standard elastic chinstrap

4-point chinstrap for EVO® helmets. Releases automatically at forces between 150 Et 250 Newtons.




Available for:     

**EVO® LINESMAN CHINSTRAP**  
EN 397, EN 50365

AHV200-000-000 EVO® Linesman Chinstrap

**LED CAP LAMP**  
FOR HARDCAP™ A1+



AHV310-000-000 LED Cap Lamp for HardCap™ A1+



## CHAMLON™ SWEATBANDS

Made from high quality cotton core with porous PU coating for maximum sweat absorption. Dermatologically tested, pH neutral.



Available for:



AJA840-000-200

Chamlon™ Sweatband for Revolution® Flex, Revolution® Et OneTouch™ Harness



Available for:



AJA880-000-200

Revolution® Flex Chamlon™ Replacement Extended Sweatband



## BRUSHED NYLON SWEATBAND



Available for:



AJA830-001-100

4mm Brushed Nylon Foam Sweatband Blk for Revolution® Flex Et Revolution® Harness

## BRUSHED NYLON SWEATBAND



Available for:



AJA840-001-100

4mm Brushed Nylon Foam Sweatband Blk for Revolution® Flex Harness

## EVO® COOLING SWEATBAND

The EVO® Cooling Sweatband is powered by HyperKewl™ PLUS evaporative cooling material. This unique fabric absorbs and slowly releases water through evaporation, protecting the wearer against heat stress for up to 10 hours.

Available for:



## EVO® COOLING SWEATBAND

AJA890-0J0-500


EVO® Cooling Sweatbands



POWERED BY  
**HYPERKEWL™ PLUS**

## VISIPOINT™ AIR REFLECTIVE

Visipoint™ Air uses Class RA2 high intensity reflective material offering on average, 80% more reflectivity than standard reflective clothing (dependent on observation and light angle). Enhanced material allows wider coverage on the top of the helmet to increase visibility from above.

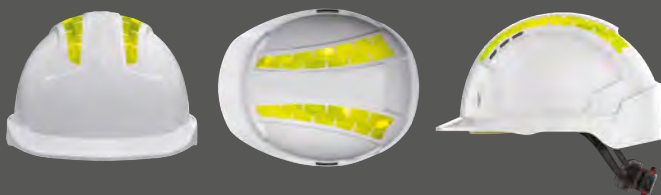

SELF APPLY VISIPOINT™ AIR FOR EVOLite®


AHV394-000-200

EVOLite® Hi-vis yellow Visipoint™ Air decal kit



visipoint  
AIR

IMPROVED  
VISIBILITY  
FROM ABOVE

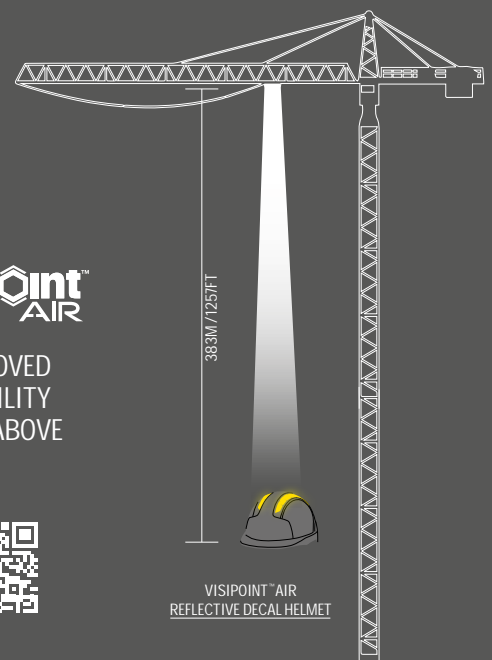

# CR2 REFLECTIVE

CR2 uses high intensity reflective material offering, on average, 60% more reflectivity than standard reflective clothing (dependent on observation and light angle). CR2 is available in a wide range of colours allowing for company branding and enabling visual identification of first aiders and fire marshals.



BE SEEN AT A SAFE DISTANCE WITH CR2

## EVOLite® VENTED HELMET FITTED WITH SILVER CR2

Helmet: EN 397



AJB170-400-100 EVOLite® CR2- Revolution™ wheel ratchet

AJB160-400-100 EVOLite® CR2- OneTouch™ slip ratchet

### SELF APPLY



#### SELF APPLY CR2 FOR EVOLite®



AHV390-002-900 EVOLite® silver CR2 decal kit

AHV390-000-500 EVOLite® blue CR2 decal kit

AHV390-000-200 EVOLite® yellow CR2 decal kit

AHV390-000-800 EVOLite® orange CR2 decal kit

AHV390-000-600 EVOLite® red CR2 decal kit



#### SELF APPLY FIRST AID CR2 FOR EVOLite®

AHV440-000-300 EVOLite® First Aid



#### SELF APPLY CR2 FOR EVO®5

AHV444-002-900 EVO®5 silver CR2 decal kit



#### SELF APPLY CR2 FOR EVO® VISTA®

AHV400-002-900 EVO®VISTA® silver CR2 decal kit



#### SELF APPLY CR2 FOR EVO®3 / EVO®2

AHV391-002-900 EVO®3/EVO®2 silver CR2 decal kit



#### FIRST AID CR2 FOR EVO® VISTA®

AHV400-000-300 EVO®VISTA® First Aid



#### SELF APPLY FIRST AID CR2 FOR EVO®3 / EVO®2

AHV441-000-300 EVO®3/EVO®2 First Aid

## SUREFIT™ THERMAL SAFETY HELMET LINER

The SureFit™ Thermal Helmet Liner is tested to ensure compatibility with all JSP EVO® safety helmets. The liner provides all-day comfort and warmth, helping to prevent the use of incompatible and dangerous alternatives, such as hoodies worn underneath helmets.



Compatible with: ALL JSP HELMETS



SUREFIT™ THERMAL SAFETY HELMET LINER			
AHV002-301-100	Medium / large, black	AHV002-301-600	Medium / large, hi vis orange
AHV004-401-100	Large / extra large, black	AHV004-401-600	Large / extra large, hi vis orange

## HI VISIBILITY UPF50 NECK CAPE

The Hi Visibility Neck Cape provides protection against solar UV radiation to UV50 level, as well as being waterproof, fire retardant and anti-static, providing complete coverage of the neck.



\* Not available for EVO Lite® Skyworker™, EVO® Vista® DUALSWITCH™, EVO®5 DUALSWITCH™ & EVO® Alta™

Compatible with:



HI VISIBILITY NECK CAPE	
EN 13758-1, ISO 14116, EN 1149-5	
AHV150-001-600	Hi visibility neck cape

## EVO® NECK CAPE ULTIMATE SUN PROTECTOR

The EVO® Neck Cape provides complete neck and ear UPF 50+ protection, offering full compatibility with EVO® safety helmets and Sonis® mounted ear defenders. The neck cape is made with lightweight materials and specially designed to maximise air ventilation.



Compatible with:



EVO® NECK CAPE	
EN 13758-1, ISO 13688	
AHV180-000-400	EVO® Neck Cape, grey
AHV180-007-200	EVO® Neck Cape, grey/black camouflage



The EVO® Neck Cape has been developed to provide maximum coverage. The level of sun protection varies depending on the JSP EVO® safety helmet model.

Grey/Black Camouflage

# USE CLEAN REPEAT

Keeping PPE clean is crucial for hygiene and protection. Unclean equipment can cause irritation for the wearer and may not be able to perform at the intended level. Following the proper cleaning and maintenance procedures maximises usage life, allowing PPE to be reused for longer.

JSP offer a range of non-abrasive, alcohol-free cleaning products, designed to enable easy maintenance and protect your PPE.



## LENS & PPE CLEANING STATION

Wall mounted Lens and PPE Cleaning Station including 4 boxes of 280 tissues and 1 bottle of cleaning spray. All items can be replaced and refitted in the cleaning station which helps to keep all necessary equipment contained and in one place.

**ASU200-000-200** Complete with 4x boxes of 280 tissues, 1x500ml cleaning fluid, label & mirror

## TISSUES

Each box contains 280 tissues that are low lint, soft, non-abrasive and absorbent for easy cleaning. Use with cleaning spray for best results.

**ASU200-000-300** Box of 280 multi function cleaning tissues

## WIPES

100 alcohol-free PPE cleaning wipe sachets suitable for a range of JSP PPE, including safety spectacles, goggles, faceshields, reusable half and full face masks, and ear defenders.

**ASU200-000-100** Box of 100 pre-moistened lens and PPE wipes

## CLEANING SPRAY

Anti-bacterial, anti-static spray cleaning fluid. Alcohol- and silicone-free.

**ASU200-000-400** 500ml bottle of lens and PPE cleaning fluid

## JSP GUIDES ONLINE

Digital user guides and tutorial videos demonstrate how to fit and maintain products correctly.



# RESPIRATORY PROTECTION

Every year thousands of workers are affected by breathing airborne dusts and gases that are hazardous to health. As experts in safety, we are committed to helping keep workplaces safe and healthy.

JSP design and manufacture high quality, innovative respiratory protective equipment (RPE) to help combat workplace exposure hazards, leading the industry with the first range of RPE assured by the BSI Kitemark™ scheme. Our respiratory products are developed using the recently upgraded respiratory test facility and batch-release tested in the dedicated quality assurance laboratory, ensuring top performance levels are achieved and maintained. JSP RPE is backed up by full technical support with an expert team of accredited fit testers available across the UK and Europe. Respiratory protection seminars and training courses on offer at our manufacturing headquarters in Oxfordshire provide detailed information on respiratory hazards, RPE, and the importance of face fit testing.






JSP

POWERCAP  
INFINITY

ILS

# POWERCAP® INFINITY® TH3 POWERED AIR PURIFYING RESPIRATOR



The PowerCap® Infinity® PAPR – a fully integrated TH3 powered air respirator offering four of the highest levels of protection in one intuitive head mounted unit. Giving the wearer complete above the neck 4 in 1 protection. The perfect choice for many industries where dust poses a great danger to health. The unit provides the very latest in Powered Air Purifying Respiratory technology, combining decades of innovation from JSP in the fields of head, respiratory, eye and face and hearing protection.



<b>POWERCAP® INFINITY®</b> EN 12941-TH3PSL, EN 397, EN 166 	
CEA646-000-100	Powercap® Infinity® complete unit - white
CEA646-000-500	Powercap® Infinity® complete unit - blue
CEA646-001-100	Powercap® Infinity® complete unit - black
CEA646-000-800	Powercap® Infinity® complete unit - orange



## 4 IN 1 FULLY INTEGRATED PROTECTION

### 1 HEAD PROTECTION

PowerCap® Infinity® is built around the super strong EV0®5 industrial safety helmet, offering EN 397 protection. The Revolution® Flex wheel ratchet harness provides a pressure-free fit for all day comfort.



EN 397, EN 50365



### 2 HIGH EFFICIENCY QUICK-CHANGE FILTERS

High capacity HEPA filters and aerodynamically optimised pre-filter covers deliver a minimum of 160 litres per minute of clean air, with real-time diagnostics automatically adapting airflow to match the wearer's breathing rate.



PowerCap® Infinity® provides users with clean air to a level of EN 12941:1998 + A2: 2008 TH3PSL – the highest possible rating, with an NPF of 500 (UK APF 40).



### 3 PANORAMIC IMPACT VISOR

The optical class 1 visor offers EN 166 B medium energy impact resistance at speeds up to 270mph. A replaceable peel-off visor protector helps to prevent scratches and damage, extending usage life.



EN 166.1.B

### 4 EAR DEFENDERS\*

PowerCap® Infinity® has been developed to integrate seamlessly with the Sonis® mounted ear defender range, providing certified compatible hearing protection that peaks at an unbeaten 36dB SNR.



EN 352-3



\*Sonis® mounted ear defenders 'available separately



## NO NEED TO FACE FIT TEST

JSP have carried out a number of tests and found, like the HSE, that a tight-fitting mask works very well when the wearer is clean-shaven but performance levels drop quickly when the wearer has facial hair. PowerCap® Infinity® removes the need for fit testing, ensuring that a high volume of clean air is delivered to the breathing zone to provide a high level of protection.




No need to FACE FIT test

# POWERCAP® INFINITY® SPARES & MAINTENANCE

PowerCap® Infinity® has been developed as a modular system, making it easy to disassemble and reassemble for effortless cleaning and maintenance. To ensure optimal performance it is important that maintenance is carried out on a regular basis. The main components can be cleaned with a damp cloth or brush. The face seal can be easily removed for machine washing with a mild detergent at 30°C.



Effortless disassembly  
for cleaning

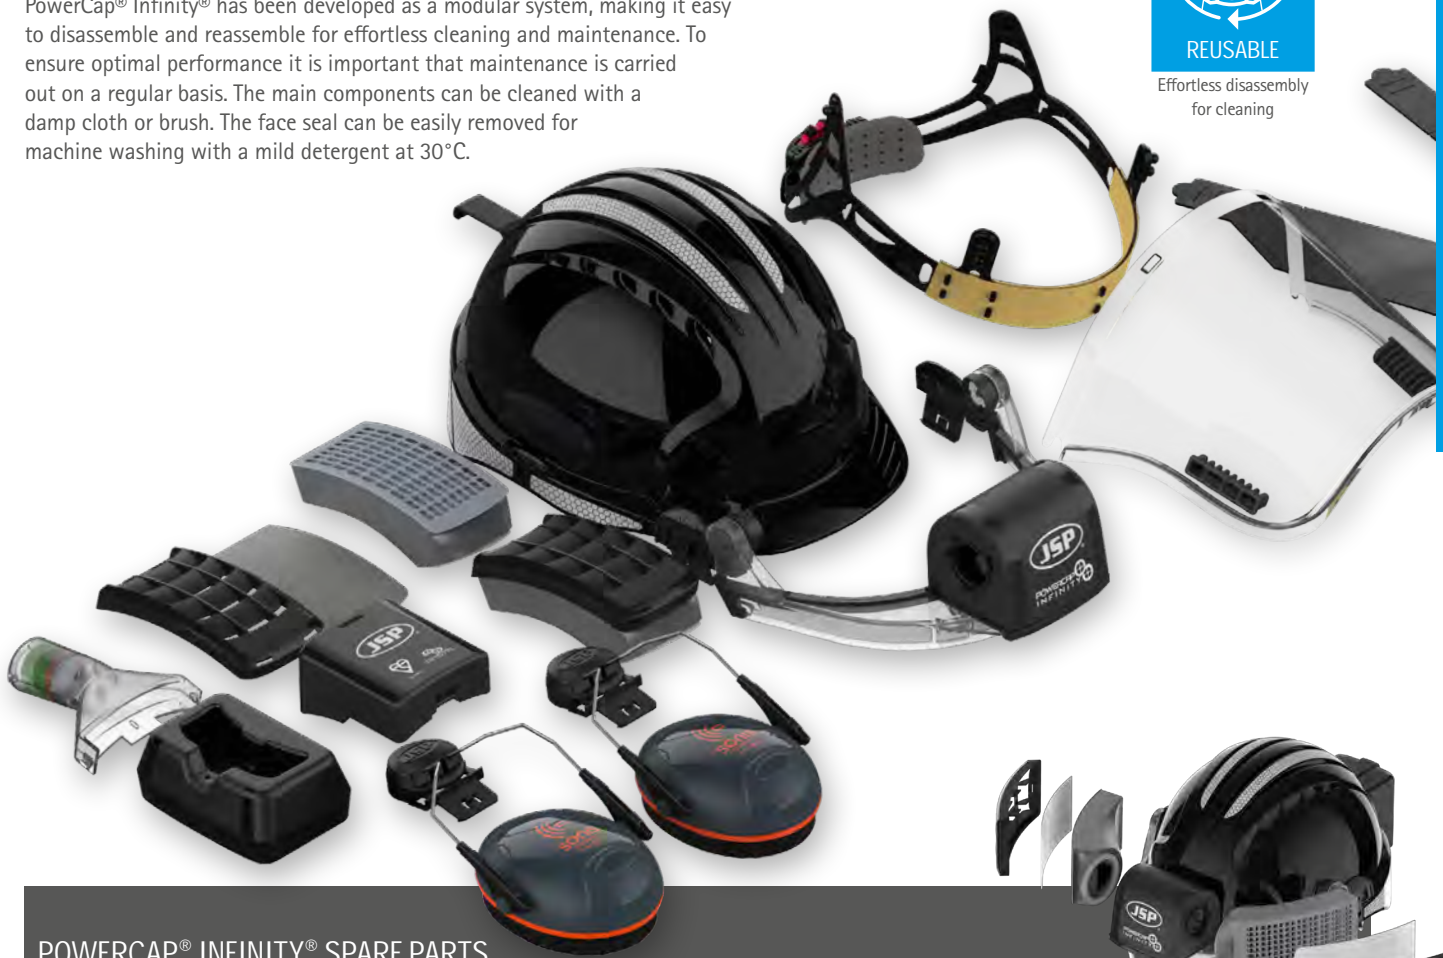

## POWERCAP® INFINITY® SPARE PARTS

CEU100-006-500	Pre-filters - pack of 5 pairs with 2 covers	CEU220-001-100	Replacement foam seal
CEU150-000-000	Pre-filters - pack of 50 pairs	CEU170-000-000	PowerBox2™ battery pack
CEU110-001-300	Replacement visor	CEU170-001-100	Carry case - PowerCap® Infinity®
CAU180-000-000	Peel off visor protectors - pack of 10	CAU660-000-400	TH3P R SL filters - 1 pair
CEU180-000-000	Visor seal	AKG179-P00-100	White EVO®5 helmet for PowerCap® Infinity®
CEU120-001-300	Twin turbo drive unit and visor carrier assembly	AKG179-P00-500	Blue EVO®5 helmet for PowerCap® Infinity®
CEU130-001-100	Charge dock and power supply	AKG179-P01-100	Black EVO®5 helmet for PowerCap® Infinity®
CEU140-001-100	Airflow indicator test unit	AKG179-P00-800	Orange EVO®5 helmet for PowerCap® Infinity®
CEU190-000-000	Helmet harness strap	AJA840-000-200	Chamlon™ Sweatband for Revolution® Flex Harness

## MINIMAL MAINTENANCE

The smart technology embedded in PowerCap® Infinity® identifies when the filters are blocked and need changing. As a general guide, pre-filters should be changed daily and filters weekly. The visor and seal skirt require replacement when damaged or worn. Replacement parts are listed in the table above.



FITTING &  
CARE VIDEOS  
<http://bit.ly/Infinity-videos>



# POWERCAP® ACTIVE™ TH1 POWERED AIR PURIFYING RESPIRATOR



Powercap® Active™ is a lightweight powered air purifying respirator with an EN 812 bump cap. The IP version provides additional eye and face protection. Firm-fitting and ergonomically designed, the Powercap® Active™ is designed to protect the user from dust and other airborne particulate pollutants to EN 12941 TH1PSL.



No need to FACE FIT test

**IMPACT PROTECTION**



No need to FACE FIT test

**POWERCAP® ACTIVE™**  
Respirator: EN 12941 TH1PSL  
Bump cap: EN 812

**CAE601-941-100** PowerCap® Active™ 0.375mm thick polycarbonate visor

**Carry case contains:**

- Headtop
- Filter unit
- Flow test unit
- Battery, charger & plug

**POWERCAP® ACTIVE™ IP**  
Respirator: EN 12941 TH1PSL  
Bump cap: EN 812 Visor: EN 166.1B

**CAE602-941-100** PowerCap® Active™ IP 1mm thick polycarbonate impact visor

**Carry case contains:**

- Headtop
- Filter unit
- Flow test unit
- Battery, charger & plug

## POWERCAP® ACTIVE™ SPARES

<b>CAU030-000-000</b>	Powercap® replacement visor
<b>CAU170-000-000</b>	Tear off polycarbonate visor strips - pack of 10
<b>CAU601-001-100</b>	Powercap® filters black - pack of 2
<b>CAU610-000-010</b>	Powercap® pre-filter pads - pack of 10
<b>CAU070-001-100</b>	Powercap® replacement face seal
<b>CAU340-001-100</b>	Powercap® Active™ battery complete

<b>CAU330-001-100</b>	Powercap® Active™ replacement cap black
<b>CAU360-001-100</b>	Powercap® Active™ replacement motor/fan unit
<b>CAU990-001-300</b>	Powercap® replacement storage bins
<b>CAU080-000-000</b>	Powercap® IP replacement impact visor
<b>CAU150-000-000</b>	Powercap® IP peel off visor covers - pack of 10
<b>CAU071-001-100</b>	Powercap® IP replacement face seal

# JETSTREAM® TH2 POWERED AIR PURIFYING RESPIRATOR



Jetstream® is a belt-mounted rechargeable powered air purifying respirator (PAPR) with large capacity filter. Air is supplied through a highly flexible reinforced hose to the loose-fitting nylon headtop.



No need to FACE FIT test

## JETSTREAM® DUST / GAS & VAPOURS / GAS & VAPOURS & DUST EN 12941-TH2

<b>CBB610-211-100</b>	Jetstream® TH2PSL filter	
<b>CCA630-211-100</b>	Jetstream® TH2A2 filter	
<b>CCA620-211-100</b>	Jetstream® TH2A2PSL filter	

**Carry case contains:**

- White nylon headtop
- Battery, charger & plug
- Filter unit
- Hose
- Flow test unit



# JETSTREAM® TH2 POWERED AIR PURIFYING RESPIRATOR KITS

Jetstream®



Jetstream® kits contain a belt-mounted rechargeable respirator with your choice of filter and headtop, offering the ideal protection for a range of applications.



## JETSTREAM® WELDER KIT

Jetstream®: EN 12941-TH2 Cobra™ Welding head top: EN 175  
Auto darkening lens: EN 379 Grinding visor: EN 166

CBP010-001-100

Jetstream® TH2PSL  
Welder kit



CDP010-901-100

Jetstream® TH2A2PSL  
Welder kit



### Carry case contains:

- Cobra™ welding/ grinding head top
- Filter unit
- Flow test unit
- Battery, charger & plug
- Hose

## JETSTREAM® INDUSTRIAL KIT

Jetstream®: EN 12941-TH2 Grinding visor: EN 166

CBP030-001-300

Jetstream® TH2PSL  
Industrial kit



CDP030-201-300

Jetstream® TH2A2PSL  
Industrial kit



### Carry case contains:

- Grinding visor head top
- Filter unit
- Flow test unit
- Battery, charger & plug
- Hose

## JETSTREAM® CONSTRUCTOR KIT

Jetstream® EN 12941-TH2 EVO®5 Helmet: EN 397 Visor: EN 166



CBP020-000-000

Jetstream® TH2PSL  
Constructor kit



CDP020-000-000

Jetstream® TH2A2PSL  
Constructor kit



### Carry case contains:

- EVO®5 safety helmet, sealed polycarbonate visor
- Filter unit
- Flow test unit
- Battery, charger & plug
- Hose

## JETSTREAM® SPARES

CBU610-000-000

Jetstream® dust filter TH2PSL

CBU620-000-000

Jetstream® dust & gas filter TH2A2PSL

CBU630-000-000

Jetstream® gas filter TH2A2

CBJ140-001-300

Jetstream® Industrial visor

CBU1A50-001-100

Jetstream® helmet replacement skirt

CBU170-001-100

Jetstream® faceshield replacement skirt

CEU180-000-000

Jetstream® - visor seal

CEU110-001-300

Jetstream® - replacement visor

CBU210-001-100

Jetstream® 8hr power unit only

CBU211-001-100

Jetstream® gas 8hr power unit only

CBU220-001-100

Jetstream® Dust 8hr waist mounted multi region power unit (TH2PSL)

CBU231-201-100

Jetstream® 8hr waist mounted multi region power unit (A2)

CBU233-201-100

Jetstream® 8hr waist mounted multi region power unit (A2PSL)

CBH030-000-000

Jetstream® nylon hood

CBH050-000-000

Jetstream® clear hood

CBH010-000-000

Jetstream® white EVO®5 helmet

CBU240-000-500

Jetstream® filter cover translucent blue (not A2 or A2PSL filter compatible)

CBJ031-001-100

Airfed Cobra® Welding visor din 9-13

CBJ011-001-100

Airfed Cobra® Welding grinding visor din 9-13

CAU180-000-000

Jetstream® - peel off visor protectors (Pack of 10)

# ENSURING A GOOD FIT WITH RESPIRATORY PROTECTIVE EQUIPMENT

Tight-fitting RPE relies on creating a seal between the mask body and the wearer's face to provide protection – a poorly fitted facepiece that leaks around the face seal cannot provide the correct level of protection to the wearer. Tight-fitting RPE products include disposable respirators, reusable half masks and full face masks, plus powered half and full face masks. Fit testing is required for all employees who wear these types of respirators.

## 3 SIMPLE STEPS FOR AN EFFECTIVE FACE FIT



**1** FACE SIZE  
& SHAPE



**2** ENSURE  
COMPATIBILITY



**3** GET FIT  
TESTED



# STEP 1 FACE SIZE AND SHAPE

Face size and shape are important considerations when selecting RPE. The mask must fit the wearer's facial features to create a seal and provide protection. Respirators are available in a range of sizes to fit different facial dimensions. To ensure a good fit, face shape and size must be considered and, if possible, measured prior to selection.



The five headforms are derived from measured facial dimensions of human test subjects, and are used for designing respiratory protective equipment as well as helping with selection. Respirators are designed to fit specific size designations and are tested on the relevant headform size.

Respirator sizes are based on dimensions given in international standard ISO 16976-2, Anthropometrics. Five headform sizes are described in the standard: Small, Short-Wide, Medium, Long-Narrow, and Large.






For your **FREE** face size guide contact your local sales office.

## SIZE SELECTION GUIDE


JSP Force® Size Guides are available free of charge to estimate facial dimensions and check whether a Small (S), Medium (M), or Large (L) mask would provide the best fit.

The Force®8 half mask and Force®10 Typhoon™ full face mask are available in Small (S), Medium (M), and Large (L) sizes to provide a great fit for a wide range of users. The Force®8 half mask is available in an additional size, Short-Wide (SW), which provides an alternative fit to Small (S) and Medium (M) masks. The Force®8 SW is designed to fit a different facial profile with a slightly wider nose bridge.

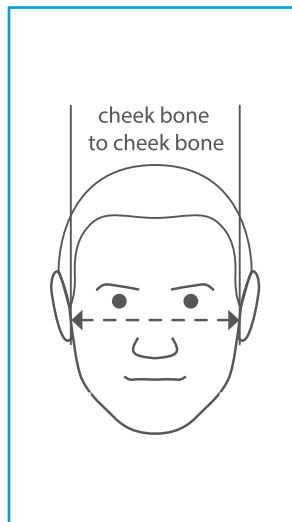

129 - 139mm	L	L	L
119 - 129mm	M	M	L
109 - 119mm	M	M	M
99 - 109mm	S	SW	M

120 - 133mm	133 - 145mm	145 - 160mm
-------------	-------------	-------------

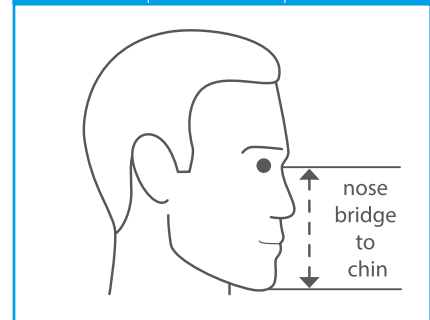

This chart is a guide to selecting a size of mask, it is not definitive, correct face fit test methods should be used to ensure the suitability of the selected size for the individual wearer.

## STEP 2 COMPATIBILITY

In some cases, it is necessary to wear other PPE in combination with a tight-fitting respirator. Equipment selected must be compatible with the respirator to ensure that protection is maintained. The sealing area around the mask must not be interrupted, and other equipment must not push or move the mask out of place while the wearer is working.

During fit testing (see page 61) all other PPE must be worn to check that the wearer can achieve a good respirator fit while wearing the other items.



### FACESHIELDS

Helmet and browguard mounted faceshields must be designed to be used in combination with the respirator, so that the mask body and filters fit behind the visor and allow freedom of movement.

### SAFETY EYEWEAR & PRESCRIPTION SPECTACLES


Eyewear fits close to the nose bridge and must not compromise the mask seal in this area. Compatible goggles and safety spectacles fit correctly with the mask to ensure proper protection. RX inserts are available for those required to wear a full face mask with prescription lenses.

**JSP complete above-the-neck solutions are designed and tested to work together for optimum performance and the highest levels of protection.**

## WHICH FACTORS AFFECT FIT?

In order to provide a good fit, the face seal area of a respirator must not be interrupted so that it can seal effectively with the wearer's face. Some factors affecting the fit of tight-fitting respirators include:

- Facial hair – wearers of tight-fitting RPE must be clean-shaven in areas that are in contact with respirator seal.
- Eyewear & other PPE – prescription spectacles and other PPE can affect respirator fit, and any eyewear or protective items worn at work should also be worn during a fit test to ensure compatibility.
- Jewellery & make up – must be removed if in contact with respirator seal.

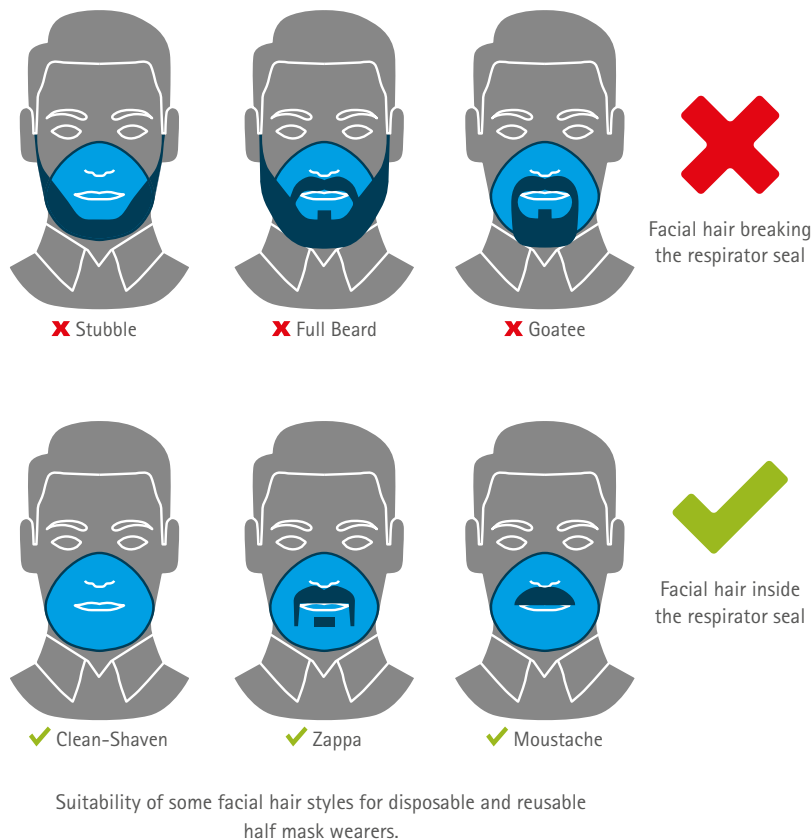


## HOW DOES FACIAL HAIR AFFECT RESPIRATOR FIT?

Facial hair can interrupt the seal area of the respirator, meaning a fit cannot be achieved. Quantitative fit checks with the Force®8 half mask demonstrated that both a full beard and stubble did not allow the respirator to seal with the face, whereas the same test performed clean-shaven delivered an extremely high fit factor and showed the mask sealed effectively.




WATCH THE FULL TEST HERE


or view the video at: <http://spsafety.info/FaceFitBeard>

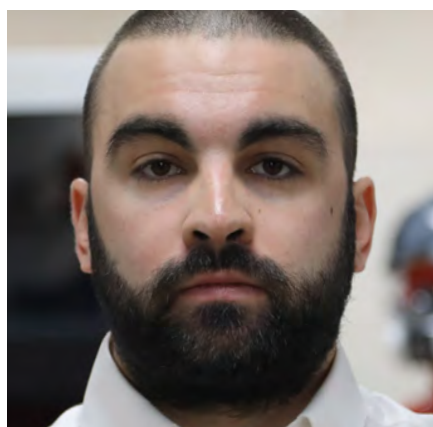

Full beard

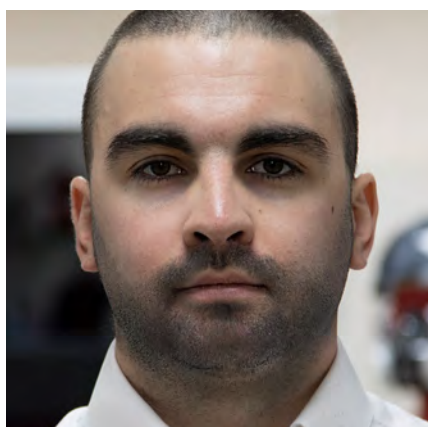


Stubble

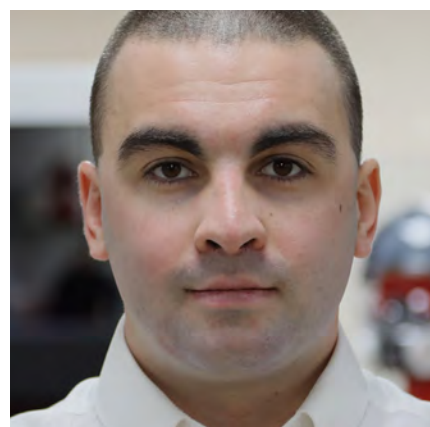


Clean-shaven




NO FIT



NO FIT



GREAT FIT



Fit factor reported by TSI Portacount™ quantitative fit testing device.

## STEP 3 FIT TESTING

Fit testing should be carried out on initial selection or, at least, before an individual uses a tight-fitting respirator in a hazardous environment. Tight-fitting RPE refers to disposable respirators, half masks and full face masks, including EN 12942 TM-rated powered masks. Fit testing should be repeated at regular intervals, determined through company policy and risk assessment, and when there is a change such as:

- The wearer gains or loses a significant amount of weight
- The wearer undergoes major dental work, facial surgery, or sustains a facial injury
- There is a change in respirator type or size

### TWO TYPES OF FIT TESTING

#### Qualitative:

- Method whereby a respirator worn by a test subject is challenged using a substance to be detected by taste or smell
- Applicable to disposable dust masks and half masks



#### Quantitative:

- Methods using ambient particle counting (APC) or controlled negative pressure (CNP)
- APC method applicable to disposable, half, and full face masks
- CNP method applicable to half and full face masks



All methods require the test subject to carry out exercises to simulate movements made during work tasks.

### FURTHER INFORMATION

For more information on fit testing see HSE fit testing information document INDG 479 and accompanying BSIF Fit2Fit Companion documents, available for free download on HSE and BSIF websites:



<https://www.hse.gov.uk/pubns/indg479.pdf>



SCAN FOR BSIF QUALITATIVE GUIDANCE DOCUMENT  
<https://www.fit2fit.org/wp-content/uploads/2019/04/Guidance-document-Qualitative.pdf>



SCAN FOR BSIF APC GUIDANCE DOCUMENT  
<https://www.fit2fit.org/wp-content/uploads/2019/04/Guidance-document-Quantitative-APC.pdf>



SCAN FOR BSIF CNP GUIDANCE DOCUMENT  
<https://www.fit2fit.org/wp-content/uploads/2019/04/Guidance-document-Controlled-Negative-Pressure.pdf>

# FACE FIT SUPPORT

JSP can help with respirator face fitting and fit testing in a number of ways. From testing to training, we provide a host of solutions to ensure JSP RPE wearers are able to achieve a good fit and get fit tested safely.



## FIT TESTING

JSP offer 'Train the Tester' fit test training sessions across the UK and Europe. Our Fit2Fit accredited personnel are also available to conduct fit testing at customer sites. Contact your local JSP representative to discuss fit testing options..

There are also a number of independent fit testing companies who can conduct testing. Fit2Fit accredited testers are listed here: <https://www.fit2fit.org/find-a-tester/>

## FIT TESTING KITS

Kits and equipment for fit testing are available. The JSP Fit Test Starter Kit is ideal for new fit testing businesses, or those beginning to use JSP RPE. The JSP Qualitative Test Kit provides everything needed to conduct a qualitative fit test.

Adaptors for quantitative fit testing JSP Force® masks are also available. Find out more about JSP fit testing kits and accessories on pages 65 - 66.



## TRAINING

JSP also offer fit testing training courses. The JSP Test Kit Course is an introduction to the JSP Qualitative Test Kit and how to use it. The new Fit2Fit Accredited Course prepares candidates for full Fit2Fit accreditation in qualitative fit testing.

For more information on JSP fit testing training courses see page 63.

## FACE FIT CHECK TECHNOLOGY

Each time tight-fitting RPE is worn the wearer must perform a 'fit check', before entering the hazard area, in addition to fit testing on selection. This ensures that the respirator has been adjusted correctly to create a tight seal.

PressToCheck™ filters provide an easy way to check the seal of Force®8 and Force®10 Typhoon™ respirators with daily face fit check technology. Find out more on page 69

# FACE FIT TRAINING COURSES

In addition to providing on-site face fit testing, JSP also offer fit test training courses. Our established half-day training course offers a useful first step toward achieving competency in the use of our qualitative test kit. A new training course has also been developed to prepare candidates for full Fit2Fit accreditation in qualitative fit testing.



JSP Innovation Hub, Oxford, UK

## JSP TEST KIT COURSE

This 2-3-hour course provides a basic foundation of knowledge necessary to understand and use the JSP Qualitative Test Kit. Attendees will learn key principles and techniques, enabling effective ongoing practice to become competent fit testers. Individuals attending this course should have basic level knowledge in using RPE.

Attendees are required to obtain a JSP qualitative test kit, JSP respirator, and a subject to practice on, prior to the course. With these requirements, this course is best suited to a pair of fit testers or two employees. This course is available to anybody with purchase of JSP qualitative test kit and JSP respirator.

### Course topics:

- Importance of fit testing
- Overview of legislation, guidance, and best practice
- Selecting 'adequate' and 'suitable' respirators
- Overview of pre-use inspection and checks
- Fitting, and performing a fit check
- How to perform a qualitative taste test method fit test
- Handling results – pass or fail
- Diagnosing issues causing failure
- Reporting
- Documentation

Attendees will receive a JSP certificate confirming completion of the course.

JSP Test Kit course	
Duration:	Half day
Entry Requirements:	Minimum age 18. Must be fluent in English language
Equipment Requirements:	Attendees must obtain test kit, respirator, and test subject prior to training
Instructor Ratio:	1:6
Assessment:	Practical & multiple choice test
Certification:	JSP Certificate confirming completion
Validity Period:	N/A



## FIT2FIT ACCREDITED TRAINING COURSE

JSP's BSIF Fit2Fit Accredited training course has been developed to take those unfamiliar with fit testing to full Fit2Fit Accredited Fit Tester status. BSIF's RPE Fit Tester accreditation scheme is not compulsory, and employers are free to take other action to comply with the requirements, but achieving this accreditation is an established route to understanding and demonstrating good practice.

The course includes two days of face-to-face instruction, with guided self-learning to be completed between, ultimately delivering competency in practical 'Qualitative Fit Testing (QLFT) Methods'. Training is delivered by Fit2Fit Accredited fit testers with a proven track record of training individuals that have successfully fulfilled Fit2Fit requirements for accredited status in both the Qualitative and

Quantitative (Ambient Particle Counting) methods of fit testing.

Assessment involves written and practical exams, which can be arranged by JSP for those wishing to complete Fit2Fit accreditation as a group at our Oxfordshire headquarters, at additional cost to the candidate(s). Alternatively, candidates can liaise directly with BSIF to arrange accreditation.

This course will provide instruction and guidance on using respirators of all types that are widely available in UK workplaces from a range of different manufacturers, including modules on legal requirements, record keeping, the use, operation, and maintenance of respirators and fit test equipment.

### Course competencies:

- Understand the terms 'Assigned Protection Factor' (APF), 'Nominal Protection Factor' (NPF), and 'fit factor'
- Selection of adequate and suitable RPE
- Inspect and identify poorly maintained RPE
- The ability to correctly fit a mask and understand the importance of a pre-use seal check / fit check
- Knowledge of legislation and guidance that deals with fit testing
- Awareness of external factors that could affect the fit test
- The purpose and applicability of fit testing
- The difference between qualitative and quantitative fit testing and when to use
- The purpose of fit test exercises
- Understand capabilities and limitations of fit test methods
- Preparation of facepieces for fit testing
- How to carry out diagnostic tests on the facepiece and fit test equipment
- How to correctly perform a fit test with the chosen method
- Awareness and knowledge of how to prevent and correct problems during fit testing
- Interpretation of results
- Record keeping requirements



Teaching methods include PowerPoint presentations, written assessments, instructor & student practical demonstrations, with a syllabus that raises real workplace scenarios.

### BSIF Fit2Fit Accredited course

Duration:	2 separate days over 3-week period.
Entry Requirements:	Minimum age 18. Must be fluent in English language.
Equipment Requirements:	Attendees must obtain test kit; a selection of test respirators will be provided.
Instructor Ratio:	1:10
Assessment:	Practical and written
Certification:	BSIF Fit2Fit Accreditation (With additional assessment)
Validity Period:	BSIF Fit2Fit Accreditation valid for 3 years



# FACE FIT TESTING



Respirators often fail to do the job they are intended to do due to poor fitting and incompatibility issues. As well as ensuring staff are properly protected, face fit testing is also an effective method of training and demonstrating the correct way to fit a mask. The Qualitative Face Fit Testing Kit is suitable for disposable dust masks and half masks only. A quantitative fit testing adaptor is available for the Force®10 Typhoon™ full face mask, which is also suitable for use with the Force®8 half mask.



SCAN TO SEE THE VIDEO  
or view the video at:  
<http://bit.ly/Fit2Face>

## QUALITATIVE FACE FIT TESTING KIT

Kit includes:

- 1 Hood
- 1 Collar
- 2 Nebulisers (1 sensitivity, 1 fit test)
- 2 Bottles of solution (1 sensitivity, 1 fit test)
- 1 Instruction manual
- 10 Test report forms

BPT050-000-000

Box Qty 1



Replacement fit test  
solution available

## FORCE® PORTACOUNT / ACCUFIT QUANTITATIVE FIT TEST ADAPTOR



SCAN FOR FITTING GUIDE  
or view the video at:  
[https://jspsafety.info/  
Quantitative-Videos](https://jspsafety.info/Quantitative-Videos)

BPT092-000-000

Box Qty 1



The Force® Portacount / AccuFIT Quantitative Fit Test adaptor enables connection of Force® respirators to TSI Portacount & AccuFIT quantitative fit testing equipment.

# JSP FACE FIT STARTER KIT

The NEW Face Fit Starter Kit from JSP contains everything necessary to conduct face fit testing or training using JSP disposable and reusable RPE.

The kit includes particulate filters, with equipment and adaptors to support both qualitative and quantitative testing methods. Products can also be selected separately, if only one filter type or testing method is required.

We are offering up to 50% special trade savings please contact sales for details: +44 (0) 1993 82050



## REUSABLE RESPIRATORS / ACCESSORIES

BHG003-1L5-000	Force® 8 Half Mask (F8-810) no filters - small	
BHT003-0L5-000	Force® 8 Half Mask (F8-820) no filters - medium	
BHG003-2L5-000	Force® 8 Half Mask (F8-830) no filters - large	
BHG002-0L5-000	Force® 8 Half Mask (F8-840) no filters - short/wide	
BPB003-104-000-UK	Force®10 Typhoon™ Full Face Mask (F10-1010) - small	
BPB003-004-000-UK	Force®10 Typhoon™ Full Face Mask (F10-1020) - medium	
BPB003-204-000-UK	Force®10 Typhoon™ Full Face Mask (F10-1030) - large	
BMN990-001-700	PressToCheck™ P3 (F-4003) Dust Filters - 2 pack	

## FACE FIT TESTING EQUIPMENT

BHU000-000-100	Force® size guide	
BPT050-000-000	Qualitative face fit testing kit	
BPT060-000-000	Qualitative face fit test hood	
BPT080-000-000	BITREX™ sensitivity & fit test solution kit	
BPT092-000-000	Force® Portacount / AccuFIT quantitative fit test adaptor	

## DISPOSABLE RESPIRATORS







BGZ130-000-A00	Disposable Moulded Mask FFP3 Valved (M632)	
BGA182-206-000	435ML FFP3 with Typhoon™ Valve (Box of 10)	
BEK136-101-A00	735 - FFP3 valved	

# SELECTING FILTERS FOR HALF AND FULL FACE MASKS

Filters for half and full face masks protect against various forms of hazardous substance, including particulates and gas / vapours. Both half masks and full face masks are tight-fitting RPE and require face fit testing upon selection and regularly thereafter - see page 61 for more information on fit testing and which methods are applicable to each type of mask. Selection of the correct filters is essential to ensure protection is provided to the wearer. A full risk assessment must be completed to determine the correct protection factor and filter type - this section gives general guidance on the appropriate filters for various hazardous substances.

## FILTER TYPES

Respiratory filters are colour-coded and marked with letters to show the type of protection provided.

TYPE	COLOUR CODE	DESCRIPTION
A		Organic vapours and gases with boiling points >65°C
AX		Organic vapours and gases with boiling points ≤65°C
B		Inorganic gases excluding carbon monoxide
E		Sulphur dioxide and acidic gases
K		Ammonia and organic ammonia derivatives
P		Solid & liquid hazardous & toxic particles



FULL FACE MASK & FILTER USE SELECTION CHART

		Silica	Concrete & stone cutting	Plaster	Welding (ferrous & lead)	Woods hard & soft	MDF (machine tooling)	Asbestos removal	Fibres & fibre glass	Volatle organic compounds (VOCs)	Contaminated earth moving, demolition	Fuel processing	Resins	Water-based paint	Brush painting – solvent-based	Spray painting – solvent-based	Manual prep	Powered prep	Chemical paint Stripping	Heat paint stripping	Coating – powder, PU, acrylic	White spirit	Chlorine	Glyphosate (weed killer)	Brick Acid	Industrial solvents & degreasers	Ammonia	Acetone
P2														<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>											
P3		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>				
A													<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>						
AX										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	
B															<input checked="" type="checkbox"/>								<input checked="" type="checkbox"/>					
K																											<input checked="" type="checkbox"/>	
AB													<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
A P3		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>				
AB P3		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				
ABEK P3		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

HALF MASK & FILTER USE SELECTION CHART

		Silica	Concrete & stone cutting	Plaster	Welding (ferrous & lead)	Woods hard & soft	MDF (machine tooling)	Asbestos removal	Fibres & fibre glass	Volatle organic compounds (VOCs)	Contaminated earth moving, demolition	Fuel processing	Resins	Water-based paint	Brush painting – solvent-based	Spray painting – solvent-based	Manual prep	Powered prep	Chemical paint Stripping	Heat paint stripping	Coating – powder, PU, acrylic	White spirit	Chlorine	Glyphosate (weed killer)	Brick acid	Industrial solvents & degreasers	Ammonia	Acetone
P2														<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>											
P3		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							<input checked="" type="checkbox"/>			
A													<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>						
B															<input checked="" type="checkbox"/>								<input checked="" type="checkbox"/>					
K																											<input checked="" type="checkbox"/>	
AB													<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
A P3												<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>				
AB P3								<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				
ABEK P3					<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
		<input checked="" type="checkbox"/> Full face mask must be worn for this task							<input checked="" type="checkbox"/> Full face mask must be worn for this task			<input checked="" type="checkbox"/> Full face mask must be worn for this task											<input checked="" type="checkbox"/> Full face mask must be worn for this task					
		<input checked="" type="checkbox"/> Full face mask must be worn for this task							<input checked="" type="checkbox"/> Full face mask must be worn for this task			<input checked="" type="checkbox"/> Full face mask must be worn for this task											<input checked="" type="checkbox"/> Full face mask must be worn for this task					
		<input checked="" type="checkbox"/> Full face mask must be worn for this task							<input checked="" type="checkbox"/> Full face mask must be worn for this task			<input checked="" type="checkbox"/> Full face mask must be worn for this task											<input checked="" type="checkbox"/> Full face mask must be worn for this task					

# PRESSTOCHECK™

## DAILY FACE FIT CHECK TECHNOLOGY

Face fit testing is reassuring, but how can you be sure that you have donned the mask correctly each time you wear it? With PressToCheck™ filters you can instantly check that you have the correct seal every time you don your mask before entering the hazard zone.



SCAN FOR  
RELATED VIDEOS  
or view the video at:  
<http://bit.ly/JSPForce8>



## PRESSTOCHECK™ FILTER TESTING AND MANUFACTURING

JSP's state-of-the-art European production facility has the ability to produce filter components on demand, reducing unnecessary material, storage and delivery wastage. Automated in-house testing of PressToCheck™ filter units,

in addition to batch release testing, ensure the filters are fully compliant with Category 3 CE marking requirements. JSP's rigorous testing procedures provide the highest quality reassurance for PressToCheck™ filter end users.



European production facility



Batch testing at European production facility's test lab

## ✓ FIT IT



### DON THE MASK

Put the straps and harness over your head and pull the straps to a suitably tight and comfortable fit.

## ✓ PRESS IT



### PRESSTOCHECK™

Press the front & backs of both filter covers together to stop air from entering through the filters.

## ✓ CHECK IT



### INHALE - No air should come through the mask.

① look forward and adjust the mask until a seal is created. Repeat this process whilst looking ② up, ③ down, ④ left and ⑤ right to complete the check.

## PRESSTOCHECK™ FILTER COMPATIBILITY

Our full range of PressToCheck™ filters are sleek and low-profile, enabling maximum compatibility with other JSP products such as the EVOGuard® visor range. PressToCheck™ filters are for use with both the Force®8 half mask and Force®10 Typhoon™ full face mask.



**FORCE®10**  
**TYPHOON™**



**FORCE®8**



# PRESSTOCHECK™ RESPIRATOR FILTER RANGE



PressToCheck™ is the easiest way to face-fit check the seal of your respirator, every time you put it on! High filtration exceeding 99.97% and low breathing resistance, with daily face fit check technology.

	Silica	Concrete & stone cutting	Plaster	Welding (ferrous & lead)	Woods hard & soft	MDF (machine tooling)	Asbestos handling	Fibres & fibre glass	Contaminated earth moving, demolition	Resins	Water-based paint	Brush painting – solvent-based	Spray painting – solvent-based	Manual prep	Powered prep	Chemical paint Stripping	Heat paint stripping	Coating – powder, PU, acrylic	White spirit	Chlorine	Glyphosate (weed killer)	Brick acid	Ammonia
<b>ABEK1 P3</b> BMN750-000-600 F-4713	✓	✓	✓	✓	✓	✓		✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
<b>A2 P3</b> BMN740-000-600 F-4123	✓	✓	✓	✓	✓	✓		✓		✓		✓				✓	✓		✓		✓		
<b>P3</b> BMN990-001-700 F-4003	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓	✓						✓		
<b>P3 Compact odour</b> BGC310-001-000 F-3103	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓	✓						✓		

Only when used with a Force®10 Typhoon™ respirator – see page 74

# FORCE® 5000 RESPIRATOR FILTER RANGE



Force® F-5000 is a new generation of gas/vapour filters engineered for minimal inhalation resistance and maximum compatibility.

	Volatile organic compounds (VOCs)	Fuel processing	Resins	Brush painting – solvent-based	Manual prep	Chemical paint stripping	Heat paint stripping	Coating – powder, PU, acrylic	White Spirit	Chlorine	Brick Acid	Industrial solvents & degreasers	Ammonia	Acetone
<b>ABEK1</b> BMK370-000-100 F-5710			✓	✓		✓	✓	✓	✓	✓	✓		✓	
<b>AB1</b> BMK360-000-100 F-5510			✓	✓		✓	✓	✓	✓	✓				
<b>A1</b> BMK340-000-100 F-5110			✓	✓		✓	✓	✓	✓					
<b>A2</b> BMK350-000-100 F-5120			✓	✓		✓	✓	✓	✓					
<b>AX</b> BMK390-000-100 F-51X0	✓	✓	✓	✓		✓						✓		✓
<b>P2 - PRE FILTER</b> BMK410-000-100 F-5002					✓									

# FORCE® CLASSIC RESPIRATOR FILTER RANGE



Force® Classic filters provide a cost-effective option, offering a wide range of gas/vapour, particulate and combined protection. The low-profile cartridges are designed to maximise the wearer's field of vision.

		Silica	Concrete & stone cutting	Plaster	Welding (ferrous & lead)	Woods hard & soft	MDF (machine tooling)	Fibres & fibre glass	Contaminated earth moving, demolition	Resins	Water-based paint	Brush painting – solvent-based	Spray painting – solvent-based	Manual prep	Powered prep	Chemical paint stripping	Heat paint stripping	Coating – powder, PU, acrylic	White spirit	Chlorine	Glyphosate (weed killer)	Brick acid	Ammonia
ABEK1 P3 BMP520-011-700 F-2713		✓ ☠	✓ ☠	✓ ☠	✓ ☠	✓ ☠	✓ ☠	✓ ☠	✓ ☠	✓		✓	✓	✓	☠	✓	✓	✓	✓	✓	✓ ☠	✓	✓
ABEK1 P2 BMP580-011-700 F-2712										✓		✓				✓	✓		✓	✓		✓	✓
ABEK1 BMN330-011-700 F-2710										✓		✓				✓	✓		✓	✓			✓
AB1P2 BMP540-011-700 F-2512										✓		✓				✓	✓		✓	✓			
AB1 BMN320-011-700 F-2510										✓		✓				✓	✓		✓	✓			
A2 P3 BMP300-011-700 F-2123		✓ ☠	✓ ☠	✓ ☠	✓ ☠	✓ ☠	✓ ☠	✓ ☠	✓ ☠	✓		✓	✓ ☠	✓ ☠	✓	✓	✓		✓	✓	✓ ☠		
A2 BMN190-011-700 F-2120										✓		✓				✓	✓		✓				
A1 BMN210-011-700 F-2110										✓		✓				✓	✓		✓				
P2 BMN380-011-700 F-2002											✓			✓									
P2 PRE-FILTER KIT BMW380-000-700 F-2002														✓									

Only when used with a Force®10 Typhoon respirator – see page 73

These tables are for guidance purposes only. A proper risk assessment by qualified personnel should be carried out before selecting an appropriate filter cartridge.

# FORCE® 10 TYPHOON™ FULL FACE RESPIRATOR



The NEW Force®10 Typhoon™ is an extremely lightweight, easy to maintain Class 1 full face respirator with panoramic visor. With 3 available sizes (S,M,L) and the ability to fit PressToCheck™ filters, the user can feel reassured of an excellent fit.



**FORCE®10 SMALL (MASK ONLY)**  
Force®10 respirator: EN 136

**BPB003-104-000-UK**

**FORCE®10 MEDIUM (MASK ONLY)**  
Force®10 respirator: EN 136

**BPB003-004-000-UK**

**FORCE®10 LARGE (MASK ONLY)**  
Force®10 respirator: EN 136

**BPB003-204-000-UK**

## EFFORTLESS MAINTENANCE FOR MAXIMUM REUSE

The Force®10 Typhoon™ has been meticulously engineered to incorporate a small number of key components. Disassembly, cleaning and maintenance are effortless with replacement parts available if necessary.

- ✓ EXTEND PRODUCT LIFE
- ✓ REDUCE WASTE



SCAN FOR MAINTENANCE GUIDE or view the video at: <http://jpsafety.info/F10MaintainGO>



Effortless disassembly for cleaning

### FORCE®10 SPARES

<b>BPS000-000-000</b>	Orinasal mask, o-ring Et diaphragm 3Pcs for Force®10
<b>BPS010-000-000</b>	Inhale/exhale diaphragm 3Pcs for Force®10 mask
<b>BPS030-000-000</b>	Harness Et clips for Force®10 mask
<b>BPS040-000-000</b>	Exhalation valve cover for Force®10 mask
<b>BPS050-000-000</b>	Peel off visor protector for Force®10 mask - pack of 10

### FORCE®8 SPARES

<b>BTC000-001-100</b>	Force®8 replacement harness cradle - black
<b>BPT170-011-000</b>	Force®8 belt bag (holds mask Et filters)
<b>BTB000-000-100</b>	JSP PPE protector - storage container

# FORCE® 8 HALF MASK RESPIRATOR



★★★★★  
Consistently rated 5 stars  
in online reviews



The Force®8 twin cartridge half mask with Typhoon™ valve offers superior low breathing resistance and a 4-point suspension harness with quick release buckles. The mask accepts the full range of low-profile PressToCheck™ filters, providing protection against particulates, many gases and vapours.



SHORT WIDE  
ISO 16976-2  
HUMAN  
FACTORS DATA

**FORCE® 8 SHORT WIDE**  
Force®8 respirator: EN 140

Force®8 half mask only

**BHG002-0L5-000**



SMALL  
ISO 16976-2  
HUMAN  
FACTORS DATA

**FORCE® 8 SMALL**  
Force®8 respirator: EN 140

Force®8 half mask only

**BHG003-1L5-000**



MEDIUM  
ISO 16976-2  
HUMAN  
FACTORS DATA

**FORCE® 8 MEDIUM**  
Force®8 respirator: EN 140

Force®8 half mask only

**BHT003-0L5-000**



LARGE  
ISO 16976-2  
HUMAN  
FACTORS DATA

**FORCE® 8 LARGE**  
Force®8 respirator: EN 140

Force®8 half mask only

**BHG003-2L5-000**



**FORCE® 8 + PRESSTOCHECK™ P3**  
Force®8 respirator: EN 140  
PressToCheck™ P3 filter: EN 143

Force®8 (medium) fitted with  
PressToCheck™ P3 dust filters

**BHT0A3-0L5-N00**



**FORCE® 8 + PRESSTOCHECK™ A2P3**  
Force®8 respirator: EN 140  
PressToCheck™ A2P3 filter: EN 14387

Force®8 (medium) fitted with  
PressToCheck™ A2P3 organic gas /  
vapour + dust filters

**BHT0B3-0L5-N00**



**FORCE® 8 + PRESSTOCHECK™ ABEK1P3**  
Force®8 respirator: EN 140  
PressToCheck™ ABEK1P3 filter: EN 14387

Force®8 (medium) fitted with  
PressToCheck™ ABEK1P3 multi-gas /  
vapour + dust filters

**BHT0C3-0L5-N00**

## CLEANING AND MAINTAINING RPE

Maintaining RPE correctly is important in order to maximise the lifespan of products. Instructions are provided with respirators that detail how to clean and maintain the product safely. Appropriate cleaning and maintenance ensure good hygiene, as well as helping to reduce costs and improve sustainability.

- ✓ USE
- ✓ CLEAN
- ✓ REPEAT



SCAN FOR  
MAINTENANCE GUIDE  
or view the video at:  
<https://jspsafety.info/3cqjqsq>




# EXHALATION VALVE BENEFITS



Exhalation valves provide greater comfort to wearers, with lower CO<sub>2</sub> levels and reduced heat and moisture build-up. Used safely, exhalation valves can help wearers retain energy and in turn improve morale. In situations with high work rates, where pulmonary stress can occur, and in hot environments, exhalation valves can be vital for safe use of RPE.

## HOW DO EXHALATION VALVES WORK?

**INHALATION:** Air is inhaled through the filters. The diaphragm in the exhalation valve is closed to prevent inhalation through the valve.

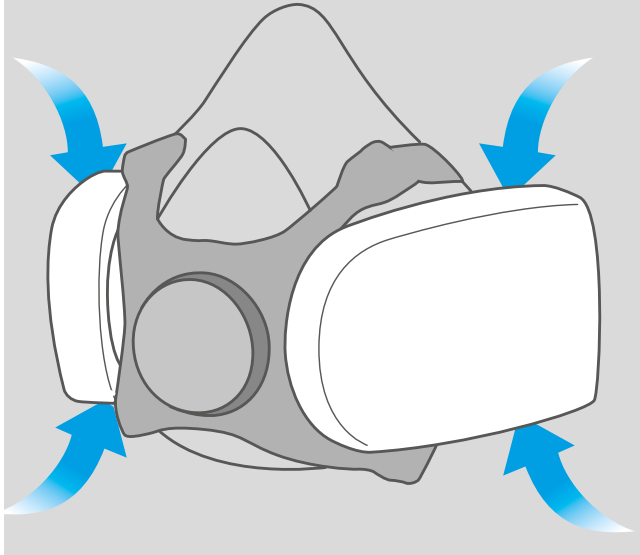


**EXHALATION:** When the wearer exhales, the diaphragm opens to allow air to pass through. This reduces the amount of air flowing back through the filter media, directing the warm and moist exhaled air out through the valve.

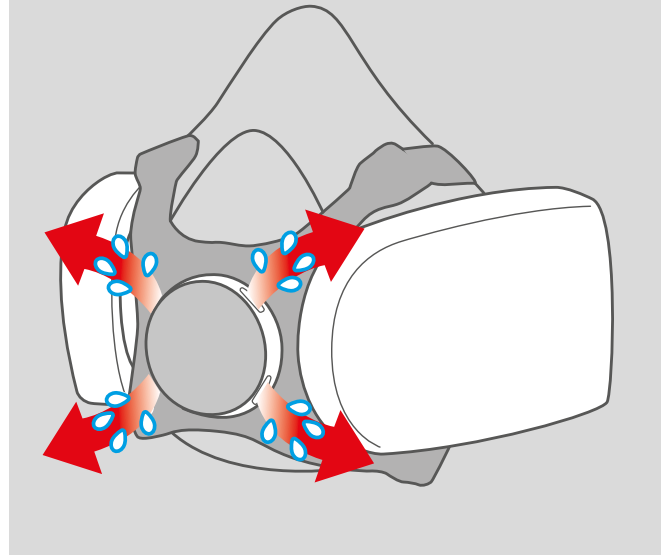


### ✓ REDUCED CO<sub>2</sub>

All JSP respirators are tested for CO<sub>2</sub> content to ensure it remains below a safe level of 1% volume. Exhalation valves work more efficiently, reducing CO<sub>2</sub> even further to avoid feelings of drowsiness or fatigue.



### ✓ REDUCED HEAT

Exhalation valves help to reduce heat build-up within the mask for more comfortable wear. This is especially important in warm environments and climates, and at high work rates, when a mask can feel claustrophobic.





### ✓ REDUCED MOISTURE

The moisture in exhaled air can clog the filter media, reducing the filtration ability of the mask. An exhalation valve directs exhaled air out to prevent a build-up in the filter material in order to improve performance and filter life.



# ADVANCED VALVE TECHNOLOGY

All exhalation valves make a difference in lowering breathing resistance and improving comfort, but some offer higher performance than others. The JSP Typhoon™ valve is designed to ensure air can easily escape through the valve, to provide extremely low breathing resistance for enhanced comfort during wear.

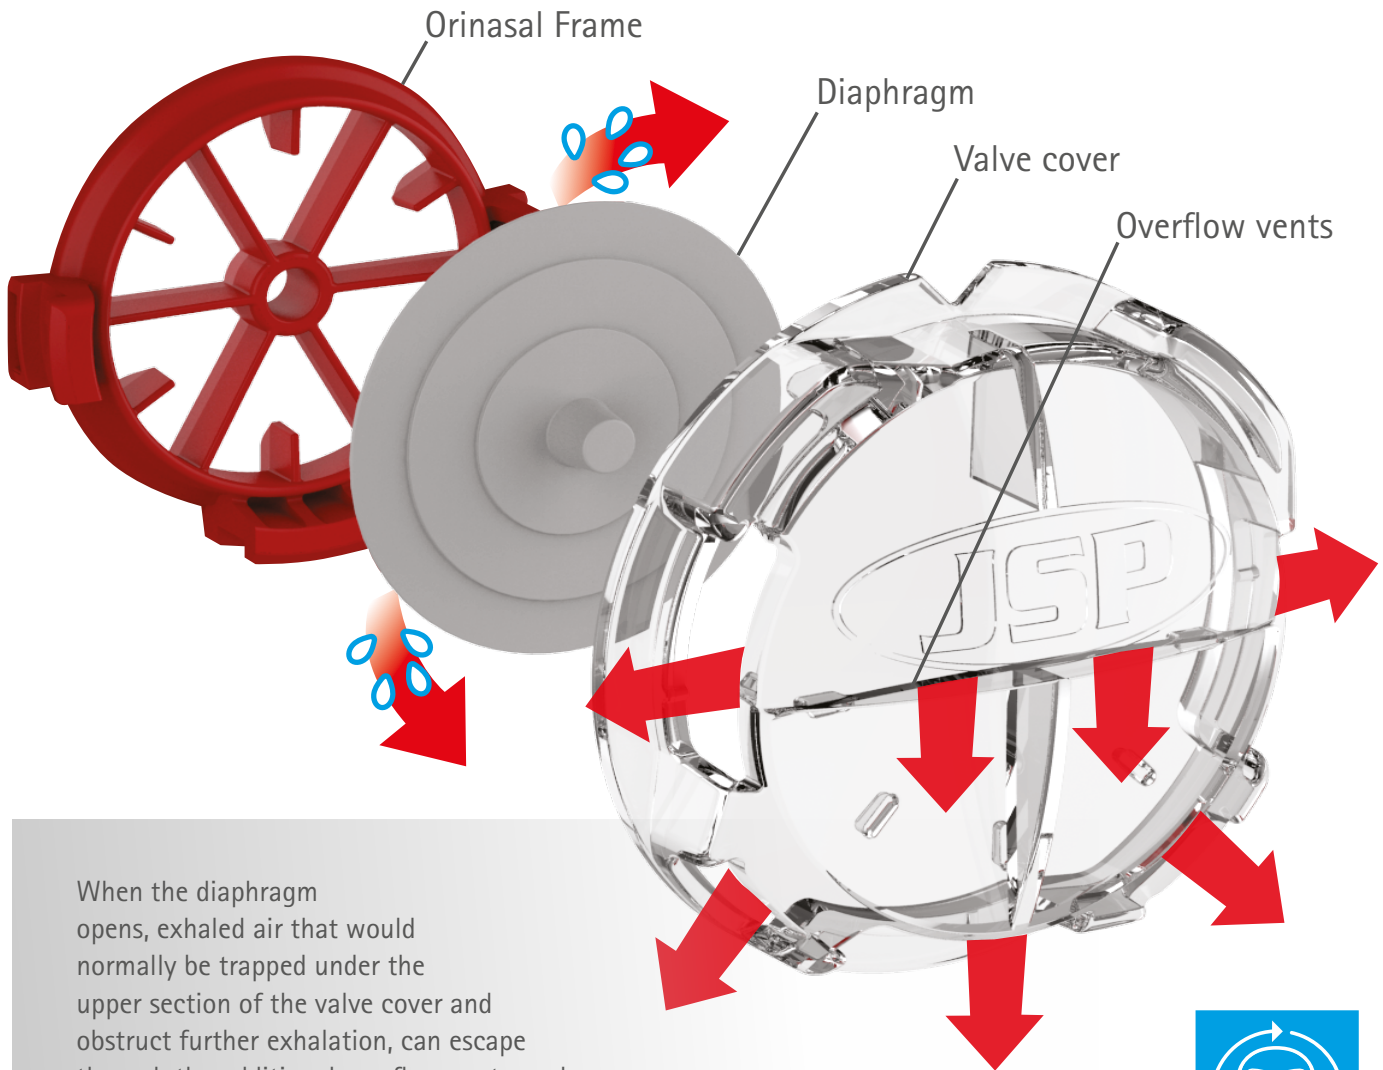

When the diaphragm opens, exhaled air that would normally be trapped under the upper section of the valve cover and obstruct further exhalation, can escape through the additional overflow vents, and assure unrivalled low breathing resistance. The diaphragm is made from silicone, ensuring it is not affected by moisture and can therefore be used with the same high performance under very low temperatures.




Effortless disassembly for cleaning

# SPRINGFIT™ 400 SERIES

## 3-PLY FOLD FLAT, WITH INTEGRATED ENDOSKELETON



The SpringFit™ fold flat disposable mask achieves an unrivalled secure fit with the use of a unique endoskeleton structure. SpringFit™ introduces an abundance of features that maximise fit, comfort, compatibility and performance, available with Typhoon™ valve technology offering ultra-low breathing resistance.



SPRINGFIT™ MASKS INDIVIDUALLY WRAPPED EN 149			Filtration efficiency	Fine dusts	Brick dust	Concrete	Ferrous metal fume	Fibre glass	Lead fume	MDF (hand tools)	Mineral fibres	Plaster	Rockwool	Sandstone	Silica	Welding	Wood soft	Wood hard	
BGA122-202-000		421ML FFP2 non-valved (box of 10)	94%					✓		✓	✓		✓						
BGA132-206-000		431ML FFP3 non-valved (box of 10)	99%	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
BGA172-202-000		425ML FFP2 with Typhoon™ valve (box of 10)	94%					✓		✓	✓		✓						
BGA182-206-000		435ML FFP3 with Typhoon™ valve (box of 10)	99%	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
BGA802-206-000		436ML FFP3 with Typhoon™ valve and nuisance carbon layer (box of 10)	99%	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

# SPRINGFIT™ 400 SERIES - DETECTABLE

## DETECTABLE TECHNOLOGY, FOR CRITICAL ENVIRONMENTS



Combining the unique Springfit™ endoskeleton and integrated spring feature with detectable technology, the new Springfit™ Detectable respirators provide an excellent fit and comfortable wear in manufacturing environments requiring contamination control. The masks are designed with no detachable parts and are individually packed for hygiene.



SPRINGFIT™ DETECTABLE FOLD FLAT MASKS INDIVIDUALLY WRAPPED EN 149			Filtration efficiency	Fine dusts	Brick dust	Concrete	Ferrous metal fume	Fibre glass	Lead fume	MDF (hand tools)	Mineral fibres	Plaster	Rockwool	Sandstone	Silica	Welding	Wood soft	Wood hard	
BGA172-305-000		Springfit™ Detectable 429ML FFP2 with Typhoon™ valve (box of 10)	94%					✓		✓	✓		✓						
BGA182-305-000		Springfit™ Detectable 439ML FFP3 with Typhoon™ valve (box of 10)	99%	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

# F600 SERIES

## DISPOSABLE FOLD FLAT MASKS



Vertical fold flat respirators with foam padded adjustable nose clip and extended chin coverage. The F622 model features a low-resistance exhalation valve.



F621 / F622 DISPOSABLE FOLD FLAT MASKS INDIVIDUALLY WRAPPED EN 149			Filtration efficiency	Fine dusts	Brick dust	Concrete	Ferrous metal fume	Fibre glass	Lead fume	MDF (hand tools)	Mineral fibres	Plaster	Rockwool	Sandstone	Silica	Welding	Wood soft	Wood hard	
BGW170-000-S00		F622 - FFP2 valved (box of 30)	94%					✓		✓	✓		✓						
BGV120-000-Q00		F621 - FFP2 non-valved (box of 40)	94%					✓		✓	✓		✓						

# FLEXINET® 800 SERIES MOULDED CUP, ERGONOMIC 3D MESH



Flexinet® has an ergonomic 3D mesh facepiece, designed to help the mask retain its shape and offer an effective fit. Available with advanced low-resistance valve.



FLEXINET® MOULDED MASKS EN 149			Filtration efficiency	Fine dusts	Brick dust	Concrete	Ferrous metal fume	Fibre glass	Lead fume	MDF (hand tools)	Mineral fibres	Plaster	Rockwool	Sandstone	Silica	Welding	Wood soft	Wood hard	
BEQ122-201-A00		Flexinet® 821 - FFP2 non-valved (box of 10)	94%					✓		✓	✓		✓						
BER122-201-A00		Flexinet® 822 - FFP2 valved (box of 10)	94%					✓		✓	✓		✓						
BER130-001-M00		Flexinet® 832 - FFP3 valved (box of 5)	99%	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

# 700 SERIES TYPHOON™ MOULDED CUP, ULTRA-LOW BREATHING RESISTANCE



The range features the unique Typhoon™ valve for ultra-low breathing resistance, moisture and CO2 build-up.



700 SERIES TYPHOON™ MOULDED MASKS EN 149			Filtration efficiency	Fine dusts	Brick dust	Concrete	Ferrous metal fume	Fibre glass	Lead fume	MDF (hand tools)	Mineral fibres	Plaster	Rockwool	Sandstone	Silica	Welding	Wood soft	Wood hard	
BEP120-001-A00		725 - FFP2 valved (box of 10)	94%					✓		✓	✓		✓						
BEP150-001-A00		726 - FFP2 valved and nuisance carbon layer (box of 10)	94%					✓		✓	✓		✓						
BEK136-101-A00		735 - FFP3 valved (box of 10)	99%	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

# M632 - FFP3 VALVED DISPOSABLE MOULDED MASK



Moulded disposable respirator with comfort foam surround, adjustable nose clip, 4-point harness and exhalation valve.



M632 DISPOSABLE MOULDED MASK EN 149			Filtration efficiency	Fine dusts	Brick dust	Concrete	Ferrous metal fume	Fibre glass	Lead fume	MDF (hand tools)	Mineral fibres	Plaster	Rockwool	Sandstone	Silica	Welding	Wood soft	Wood hard	
BGZ130-000-A00		M632 - FFP3 valved (box of 10)	99%	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

# FILTERSPEC® THE INTEGRATED SOLUTION TO INCOMPATIBILITY



Worn together, safety eyewear and respirators often reduce each other's effectiveness because eyewear frames compromise the seal of the respirator, leading to lens misting and reduced respiratory protection. FilterSpec® combines both protective devices into an integrated unit.

**FILTERSPEC® PRO**  
 Respirator: EN 149 Goggle: EN 166  
 Clear lens: EN 170



<b>AGE130-201-100</b>	Black/clear FFP3V
<b>ASG03B-101-100</b>	FFP3 valved filters - Pk10

Ultraviolet filter scale number	Optical class (1=high, 3=low)	Low energy impact 120 m/s	Protection at extremes of temperature	Anti-mist coating	Liquid droplets	Large dust particles (>5 microns)	Molten metals and hot solids
2C-1.2	1	B	T	✓	✓	✓	✓

## 532 - FFP3 VALVED DISPOSABLE MOULDED MASK



Moulded disposable respirator with exhalation valve for low breathing resistance. Passes optional clogging (D) requirements. An adjustable 4-point head strap and 360° comfort foam enables a comfortable fit for all head sizes and shapes.



532 DISPOSABLE MOULDED MASK EN 149		Filtration efficiency	Fine dusts	Brick dust	Concrete	Ferrous metal fume	Fibre glass	Lead fume	MDF (hand tools)	Mineral fibres	Plaster	Rockwool	Sandstone	Silica	Welding	Wood soft	Wood hard
<b>BEK130-002-M00</b>		99%	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
532 - FFP3 valved (box of 5)																	

## MARTCARE® RANGE DISPOSABLE MOULDED MASKS



The Martcare® range offers cost-effective respiratory protection, subject to the same rigorous batch testing and conformity procedures applied to all JSP PPE.



MARTCARE® DISPOSABLE MASKS EN 149			Filtration efficiency	Fine dusts	Brick dust	Concrete	Ferrous metal fume	Fibre glass	Lead fume	MDF (hand tools)	Mineral fibres	Plaster	Rockwool	Sandstone	Silica	Welding	Wood soft	Wood hard
<b>BEH120-002-A00</b>		M22 - FFP2 valved (box of 10)	94%					✓		✓	✓		✓					
<b>BEG120-002-B00</b>		M21 - FFP2 non-valved (box of 20)	94%					✓		✓	✓		✓					
<b>BEH130-002-A00</b>		M32 - FFP3 valved (box of 10)	99%	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
<b>BEG130-002-B00</b>		M31 - FFP3 non-valved (box of 20)	99%	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

# USE CLEAN REPEAT

Keeping PPE clean is crucial for hygiene and protection. Unclean equipment can cause irritation for the wearer and may not be able to perform at the intended level. Following the proper cleaning and maintenance procedures maximises usage life, allowing PPE to be reused for longer.

JSP offer a range of non-abrasive, alcohol-free cleaning products, designed to enable easy maintenance and protect your PPE.



## LENS & PPE CLEANING STATION

Wall mounted Lens and PPE Cleaning Station including 4 boxes of 280 tissues and 1 bottle of cleaning spray. All items can be replaced and refitted in the cleaning station which helps to keep all necessary equipment contained and in one place.

**ASU200-000-200** Complete with 4x boxes of 280 tissues, 1x500ml cleaning fluid, label & mirror

## TISSUES

Each box contains 280 tissues that are low lint, soft, non-abrasive and absorbent for easy cleaning. Use with cleaning spray for best results.

**ASU200-000-300** Box of 280 multi function cleaning tissues

## WIPES

100 alcohol-free PPE cleaning wipe sachets suitable for a range of JSP PPE, including safety spectacles, goggles, faceshields, reusable half and full face masks, and ear defenders.

**ASU200-000-100** Box of 100 pre-moistened lens and PPE wipes

## CLEANING SPRAY

Anti-bacterial, anti-static spray cleaning fluid. Alcohol- and silicone-free.

**ASU200-000-400** 500ml bottle of lens and PPE cleaning fluid

## JSP GUIDES ONLINE


Digital user guides and tutorial videos demonstrate how to fit and maintain products correctly.



# EYE & FACE PROTECTION

Eye and face hazards present a multitude of risks to workers which, if not properly controlled, can cause irreversible, lifelong injuries. As experts in safety, we are committed to helping keep workplaces safe and healthy.

JSP design high quality, innovative eye and face protection products to help combat hazards encountered in the workplace – our eye and face protection range is developed and manufactured using the latest design and production technologies to create high performance, user-friendly solutions. Testing is carried out in the dedicated Quality Assurance laboratory, which houses specialist equipment for optical properties, impact resistance, and lens surface damage testing. JSP eye and face protection includes prescription-compatible options and a full range of accessories, with technical support available for help with selection, use and cleaning of PPE.

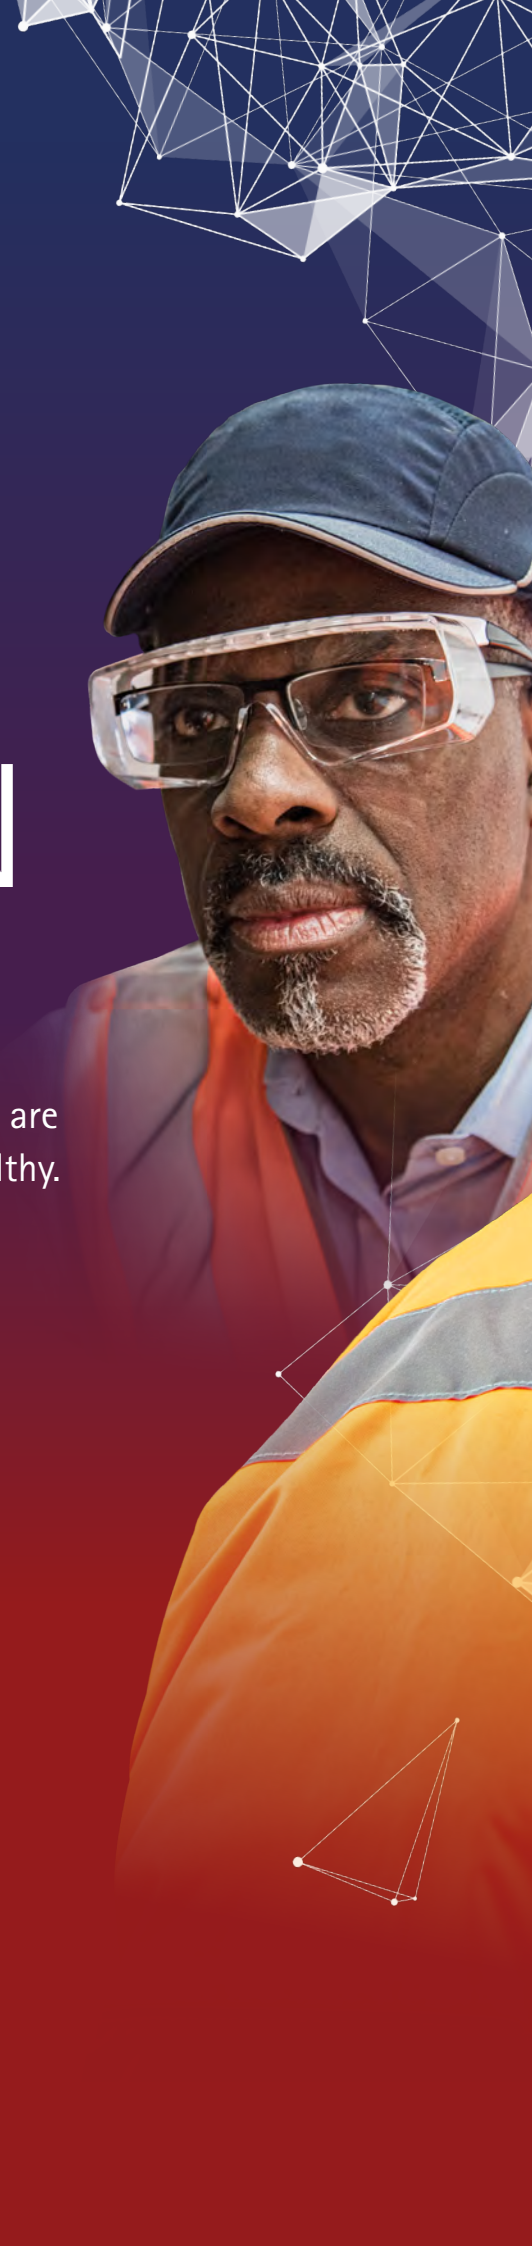



# STANDARDS ARE CHANGING

NEW eye & face  
ISO standards



Scan to view

# MARKINGS GUIDE

Eye and face protectors are marked to show level of protection and fields of use. Marking requirements, set out in EN 166, are divided into ocular (lens) and frame markings, with a separate requirement in place for where the ocular and frame form a single unit. Please note this guide details marking formats; marking positions can vary

between products. For example, an ocular marking can appear on the side or top of spectacle lenses. Also shown are JSP icons for eye and face protectors performance properties which can be used to select and compare products in this guide.

## FRAME MARKINGS



Manufacturers trademark

EN 166

EN standard

3 4 9

Fields of use

BT

Impact protection



## LENS MARKINGS

2C

Lens shade

1.2

Light transmission



Manufacturers trademark

1

Optical class

BT

Impact protection

9

Fields of use







KN

Additional markings




## OPTICAL CLASS MARKINGS

Optical class is marked by a singular number, either 1, 2, or 3 with 1 being optimum and 3 being only for short-term wear. All applicable JSP eye and face protection is optical class 1.

					
1 (highest)		2		3 (lowest)	
Suitable for continuous, long-term use		Suitable for intermittent use			

## LENS SHADE MARKINGS

The shade of the lens and UV / solar filtering is shown by a series of numbers. The first number signifies the radiation protection afforded by the lens.

	2-	UV protection
	2C- / 3-	UV protection with good colour recognition
	5-	UV and solar protection






## LIGHT TRANSMISSION MARKINGS

The second part signifies the light transmission offered by the lens. These two values are separated by a hyphen ( - ) meaning the full lens shade marking will appear as 2C-1.2, for example.

	1.2	74.4% - 100% (clear)
	1.7	43.2% - 58.1% (indoor / outdoor)
	2.5	17.8% - 29.1% (light smoke)
	3.1	8.0% - 17.8% (dark smoke)






## IMPACT PROTECTION MARKINGS

Impact protection is marked with a letter. Some impact ratings are only applicable to certain product types. If applicable, the letter 'T' is shown immediately after the impact marking, for example AT.

				
A	B	F	S	T
Withstands high speed particles, high energy impact (faceshield only)	Withstands high speed particles, medium energy impact (goggle and faceshield only)	Withstands high speed particles, low energy impact	Increased robustness (mesh eye protectors)	Protection at extremes of temperature






## FIELDS OF USE MARKINGS


Fields of use are marked with a separate, single number.

				
3	4	5	8	9
Protection against liquid droplets (goggle) and liquid splash (faceshield)	Protection against large dust particles (>5 microns) (goggle only)	Protection against gases and fine dust particles (<5 microns) (goggle only)	Protection against short circuit electric arc (faceshield only)	Protection against molten metals and hot solids

## ADDITIONAL MARKINGS

Additional features and properties of the eye protector are marked with a separate, single letter. All JSP eye and face protectors feature the relevant EN standard and manufacturer marking.

				EN 166	
K		N		European standard for personal eye protection	Manufacturer's trade mark
Resistance to surface damage by fine particles (anti-scratch)		Resistance to fogging of oculars (anti-mist)			

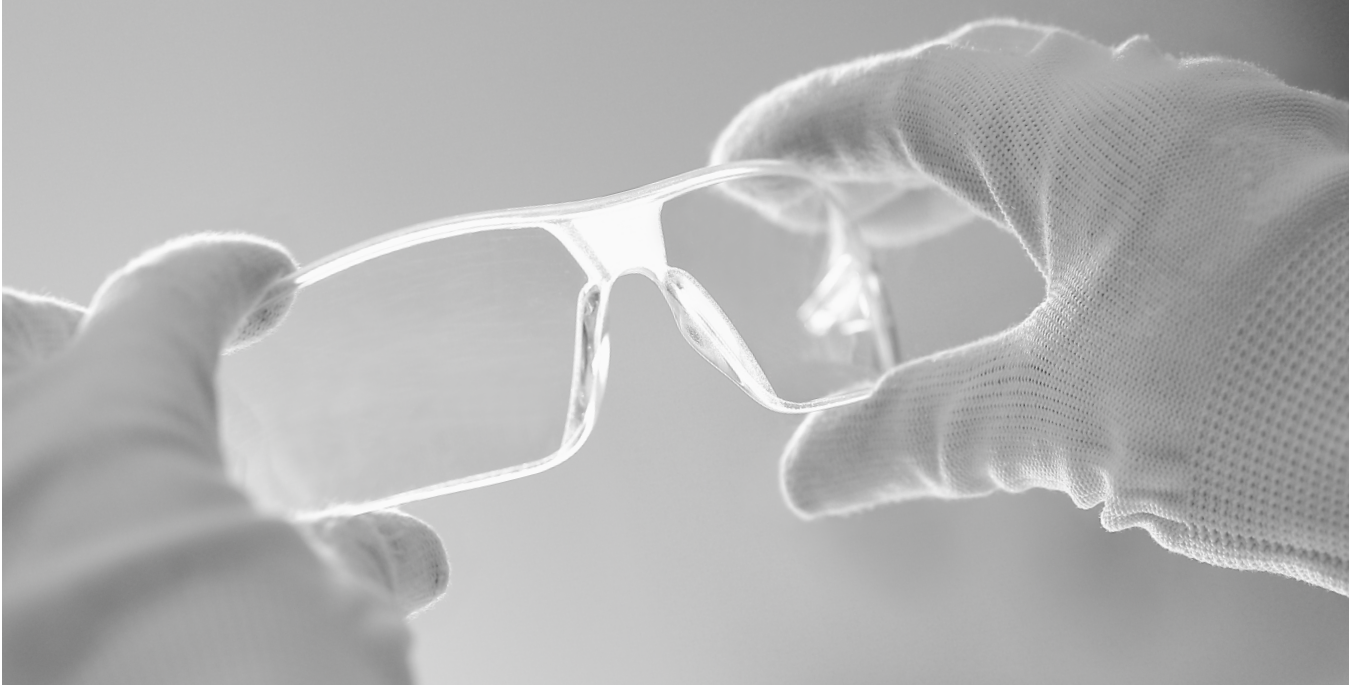


# EYEWEAR INFORMATION

Harmful optical radiation can damage the eye in different ways depending on its wavelength and properties. Certain infrared, ultraviolet, and blue light can cause partial or total blindness. In some cases effects can be immediate, and in others damage is sustained over time. Leading to eye problems or blindness later in life. The chart below shows different forms of light, their wavelengths and

properties, as well as the types of damage that can be sustained as a result of exposure. Eye and face protection should be selected with an appropriate shade to filter the specific form of harmful light identified through risk assessment and legal guidance. The JSP lens shades guide on page 86 provides more information on available lenses and the types of protection offered.

## CONSEQUENCES OF OPTICAL RADIATION

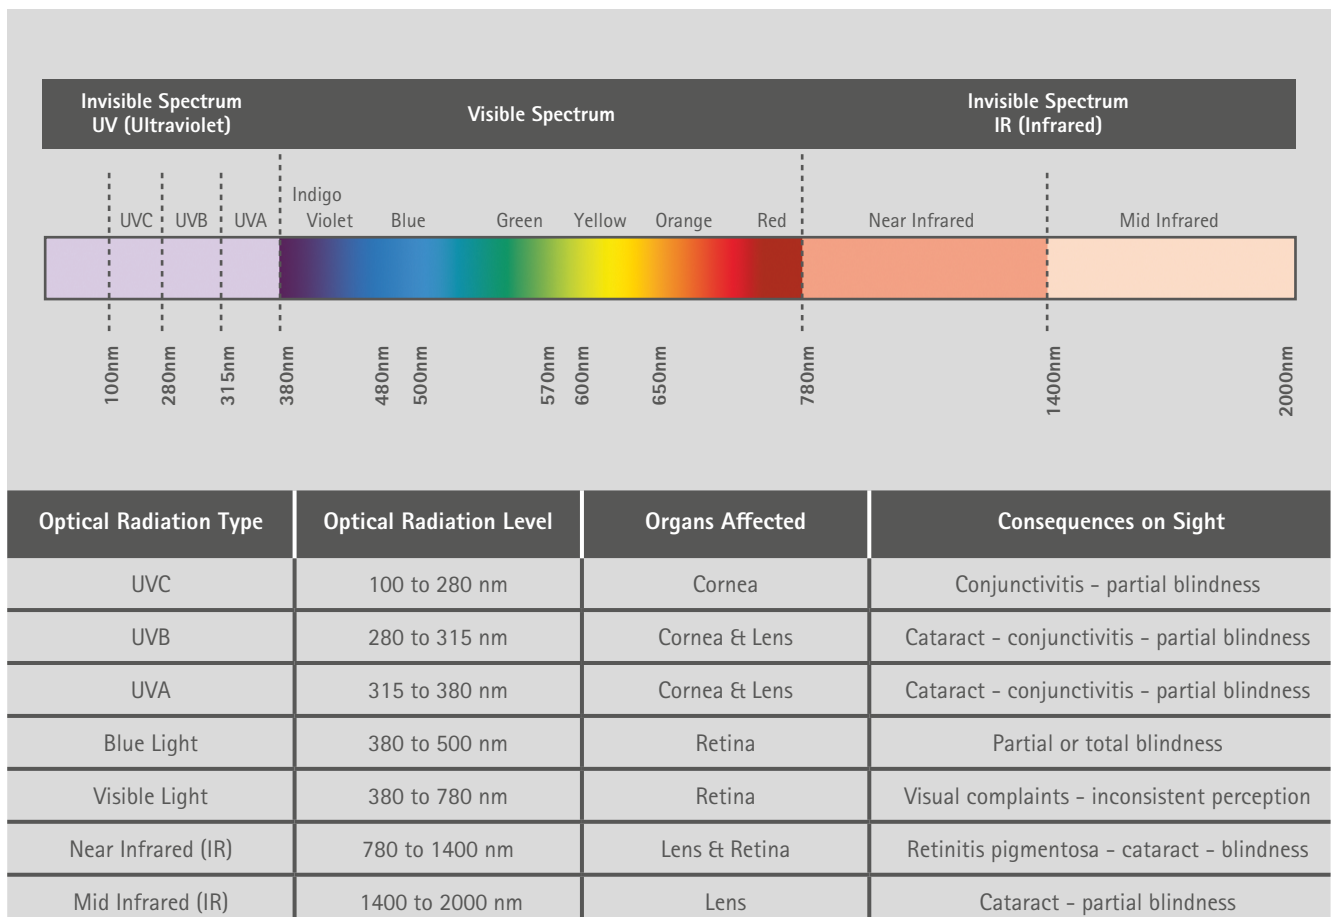

## GUIDE TO JSP LENS SHADES

Selection of a lens shade must take into account the optical radiation hazard(s) and filtering requirements. It is also important to consider the need for good visibility and colour recognition. Some lenses have limitations due to the low light transmission value required to provide effective filtering. This means the lens may not





be safe for use where colour recognition is imperative, such as for driving or electrical work. The table below provides information on JSP lens shades, showing levels of UV and IR light absorption, light transmission value, and guidance on use.

Marking	UV Absorption 280–380 nm	IR Absorption 780–1400 nm	Light Transmission Value (LTV)	Lens Shade		Functions and Suitable Uses
2-1.2 2C-1.2	 (99.99%)	 (11%)	74.4% - 100% 74.4% - 100%	Clear		Suitable for use in good visibility conditions.
5-1.4 5-1.7	 (99.99%)	 (34%)	58.1% - 74.4% 48% - 56%	Indoor / Outdoor		Reduces dazzling and harmful effects of blue light. Ideal when moving between light and dark areas.
5-2.5	 (99.99%)	 (23%)	17.8% - 29.1%	Mid Smoke		Crisp optics and glare protection whilst providing true colour recognition.
5-3.1	 (99.99%)	 (23%)	8.5% - 17.8%	Smoke		For direct sunlight and bright glare conditions.
5-2.5	 (99.99%)	 (40%)	17.8% - 29.1%	Blue Mirror		Ideal protection against sun glare as it reflects solar rays before filtering UV.
5-3.1	 (99.99%)	 (23%)	8.5% - 17.8%	Polarised		Stops horizontal reflections, eliminating glare. Ideal for driving & working around water & flat reflective surfaces.
2-1.2	 (99.99%)	 (12%)	74.4% - 100%	Yellow		Offers sharpness, acuity and contrast. Primary function is to block blue light.
2-2	 (99.99%)	 (13%)	36%	Orange 550		Any hazard with Mechanical risk - UV protection 550nm.
5-1.1<2	 (99.99%)	 (9%)	90% - 36%	Photochromic		Any hazard with Mechanical risk - Auto dark lens for anti glare adjustment.
5-1.1 / 1.4	 (99.99%)	 (25%)	85%	Gradient		Any hazard with Mechanical risk - Comfort under top light exposure.
2C-1.4	 (100.00%)	 (15%)	67%	Blueblocker Brown		Any hazard with Mechanical risk - Good protection for blue light in any situation facing screens and smartphone.

## GUIDE TO JSP LENS COATINGS

JSP eyewear lens coatings are specially designed to offer the best protection from abrasive scratches and misting. Our coating technologies have been developed over many years to provide

unrivalled Anti-Scratch and Anti-Mist performance. We have developed a range for easy reference:

Coating	Description
	PremierShield™ is a permanent high-performance Anti-Scratch (K) and Anti-Mist (N) coating with Anti-Static properties. Lenses with PremierShield™ are rated EN 166 KN.
	Hardia+™ is a permanent high-performance Anti-Scratch (K) coating. Lenses with Hardia+™ are rated EN 166 K.
	MistResist+™ is a high-performance permanent Anti-Mist (N), Anti-Static coating that also provides medium level scratch resistance. Lenses with MistResist+™ are rated EN 166 N.
	Hardia™ is an entry level Anti-Scratch coating that provides good scratch resistance at an economical price.
	MistResist™ is an entry level Anti-Mist, Anti-Static coating that also provides scratch resistance.

# STEALTH™ 9000

## HIGH PERFORMANCE WITH COMPLETE CUSTOMISATION


**STEALTH  
9000**


Stealth™ 9000 features a wraparound 9 base curve lens and slim, stylish temples with soft rubber to increase grip and enhance comfort. Branding available with company colours and logos.

STEALTH™ 9000 SPECIFICATIONS					Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard							
ASA770-15N-800		Clear	Blue & orange	EN 166 EN 170		1.2	1	F	T		<input checked="" type="checkbox"/> K Rated <input checked="" type="checkbox"/> N Rated
ASA770-16R-100		Indoor / outdoor	Blue & orange	EN 166 EN 172	5	1.7	1	F	T		<input checked="" type="checkbox"/> K Rated
ASA770-15P-900		Amber	Blue & orange	EN 166 EN 170	2	1.2	1	F	T		<input checked="" type="checkbox"/> K Rated <input checked="" type="checkbox"/> N Rated
ASA770-15W-900		Smoke	Blue & orange	EN 166 EN 172	5	2.5	1	F	T		<input checked="" type="checkbox"/> K Rated <input checked="" type="checkbox"/> N Rated
ASA770-16P-000		Smoke blue mirror	Blue & orange	EN 166 EN 172	5	2.5	1	F	T		<input checked="" type="checkbox"/> K Rated
ASA770-1CN-800		GW5 Welding	Blue & orange	EN 166 EN 175			1	F			<input checked="" type="checkbox"/> K Rated
ASA770-16X-600		Smoke polarised	Black & green	EN 166 EN 172	5	3.1	1	F	T		<input checked="" type="checkbox"/> K Rated

# EIGER™

Eiger™ offers lateral coverage with a wraparound lens and built-in side shields. Flexofit™ overmoulded TPR temples, metal-free hinges and an adjustable nose bridge offer a secure, pressure-free fit.



EIGER™ SPECIFICATIONS					Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard							
1E1GGREY23CKN		Clear	Black & grey	EN 166 EN 170		1.2	1	F	T		<input checked="" type="checkbox"/> K Rated <input checked="" type="checkbox"/> N Rated
1E1GGREY23SKN		Smoke	Black & grey	EN 166 EN 172	5	2.5	1	F	T		<input checked="" type="checkbox"/> K Rated) <input checked="" type="checkbox"/> N Rated
4E1GBST (Foam Gasket & Strap Kit)											

# LEONE™

The Leone™ spectacle's contoured design offers a secure grip without exerting pressure and features a metal core nose bridge, enabling maximum adjustment for personalised fitting. The 9 base curve lenses provide excellent side coverage.



## LEONE™ SPECIFICATIONS

Spectacle: EN 166

Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
1LEO21SVAR		Photochromic light grey to mid grey	Brown	EN 166 EN 172							
					5	1.1>2	1	F	T		<input checked="" type="checkbox"/>
1LEOCARB21SPOL		Polarised smoke lens	Carbon style	EN 166 EN 172							
					5	3.1	1	F	T		<input checked="" type="checkbox"/>

# LYSS™

Lyss™ safety spectacles feature wraparound lenses and Flexofit™ technology. The pantoscopic adjustable temples and nose bridge offer a personalised fit, complete with a cushioning browguard to enhance comfort.



## LYSS™ SPECIFICATIONS

Spectacle: EN 166

Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
1LYSDG23CKN		Clear	Black & Grey	EN 166 EN 170							
					2C	1.2	1	F	T		<input checked="" type="checkbox"/>
										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
1LYSDG23SKN		Smoke	Black & Grey	EN 166 EN 172							
					5	2.5	1	F	T		<input checked="" type="checkbox"/>
										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

# ONEX™

With wraparound 9 base curve lenses, Onex™ provides excellent side coverage and field of vision. Flexofit™ adjustable nose bridge and pantoscopic grip arms provide an adaptable fit.



## ONEX™ SPECIFICATIONS

Spectacle: EN 166

Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
1ONEB023CKN		Clear	Black / Orange	EN 166 EN 170							
					2C	1.2	1	F	T		<input checked="" type="checkbox"/>
										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
1ONEB023SKN		Smoke	Black / Orange	EN 166 EN 172							
					5	2.5	1	F	T		<input checked="" type="checkbox"/>
										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

# STEALTH™ 8000

The Stealth™ 8000 is lightweight at just 26g, with wraparound 9 base curve lens and built-in adjustable PVC nose piece for enhanced comfort and increased stability.


**STEALTH  
8000**


## STEALTH™ 8000 SPECIFICATIONS

Spectacle: EN 166

Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
ASA790-1A1-300		Clear	Clear & red	EN 166 EN 170	2C	1.2		F	T		
										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
ASA790-151-300		Clear	Clear & red	EN 166 EN 170	2C	1.2		F	T		
ASA790-161-300		Clear	Clear & red	EN 166 EN 170	2C	1.2		F	T		
ASA790-162-900		Indoor / outdoor	Clear & red	EN 166 EN 172	5	1.7		F	T		
ASA790-161-200		Amber	Amber & black	EN 166 EN 170	2	1.2		F	T		
ASA790-166-400		Smoke	Smoke & red	EN 166 EN 172	5	2.5		F	T		
ASA106-121-300 (LED version)		Clear	Black & red	EN 166 EN 170	2C	1.2		F	T		
										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

# SEEZ™

Seez™ features wraparound 10 base curve lenses for high optical clarity. Flexofit™ technology offers a secure and comfortable fit with non-slip shape memory arms and flexible nose bridge.



## SEEZ™ SPECIFICATIONS

Spectacle: EN 166

Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
1SEZBG23CKN		Clear	Black & grey	EN 166 EN 170	2C	1.2		F	T		
										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
1SEZBG23SKN		Smoke	Black & grey	EN 166 EN 172	5	2.5		F	T		
										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

# CONTINENTAL™

Continental™ features a wraparound frame and side shields with non-slip nose bridge and temples. Available with a range of lenses including Blue Blocker and gradient options.



## CONTINENTAL™ SPECIFICATIONS

Spectacle: EN 166  
Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
1CONT21GR		Clear / light smoke gradient	Black	EN 166 EN 172	5	1.1 / 1.4	1	F	T	<b>HARDJ</b>	<input checked="" type="checkbox"/>
1CONT23BB		Brown 65% Blue Blocker	Brown	EN 166 EN 172	5	1.7	1	F	T	<b>MistResist</b>	<input checked="" type="checkbox"/>
1CONT23C		Clear	Clear	EN 166 EN 170	2C	1.2	1	F	T	<b>MistResist</b>	<input checked="" type="checkbox"/>
1CONT23S		Smoke	Black	EN 166 EN 172	5	2.5	1	F	T	<b>MistResist</b>	<input checked="" type="checkbox"/>

# RIGI™

Rigi™ is lightweight at only 19g. The spectacle features unique Flex Flat temples offering an adaptable fit that stays secure even on narrow face shapes, to ensure a firm grip without exerting pressure.



## RIGI™ SPECIFICATIONS

Spectacle: EN 166  
Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
1RIG23CKN		Clear	Black & blue	EN 166 EN 170	2C	1.2	1	F	T	<b>premier SHIELD</b>	<input checked="" type="checkbox"/> K Rated <input checked="" type="checkbox"/> N Rated
1RIG23SKN		Smoke	Black & blue	EN 166 EN 172	5	2.5	1	F	T	<b>premier SHIELD</b>	<input checked="" type="checkbox"/> K Rated <input checked="" type="checkbox"/> N Rated
1RIG23IO		Indoor / outdoor	Clear & light grey	EN 166 EN 172	5	1.7	1	F	T	<b>MistResist</b>	<input checked="" type="checkbox"/>
1RIG23C		Clear	Black & blue	EN 166 EN 170	2C	1.2	1	F	T	<b>MistResist</b>	<input checked="" type="checkbox"/>
1RIG23S		Smoke	Black & blue	EN 166 EN 172	5	2.5	1	F	T	<b>MistResist</b>	<input checked="" type="checkbox"/>
1RIGBB21LB		Light brown	Light brown	EN 166 EN 170	2C	1.4	1	F	T	<b>HARDJ</b>	<input checked="" type="checkbox"/>

# STEALTH™ 16g

## JSP'S LIGHTEST SPECTACLE

JSP's lightest safety eyewear, weighing just 16g, with ultra-thin and ultra-strong optically perfect lenses.



STEALTH  
16g



### STEALTH™ 16g SPECIFICATIONS

Spectacle: EN 166

Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
ASA920-1A1-300		Clear	Clear	EN 166 EN 170	2C	1.2	1	F	T	 K Rated	 N Rated
ASA920-161-300		Clear	Clear	EN 166 EN 170	2C	1.2	1	F	T	 K Rated	
ASA920-163-000		Smoke	Smoke	EN 166 EN 172	5	2.5	1	F	T	 K Rated	
ASA920-161-200		Amber	Amber	EN 166 EN 170	2	1.2	1	F	T	 K Rated	

# Z4000™

Clear framed spectacle with wraparound polycarbonate lens and detachable cord, providing low-energy impact protection and UV filtering.



Z4000



### Z4000™ SPECIFICATIONS

Spectacle: EN 166

Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
ASA440-151-300		Clear	Clear	EN 166 EN 170	2C	1.2	1	F			

# M9700

Soft flexible nose pad and rubber temple tips ensure comfort fit and reduce slippage. Dual curved lenses offer a wide field of vision.



### M9700 SPECIFICATIONS

Spectacle: EN 166

Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
ASA748-161-100		Clear	Black / red	EN 166 EN 170	2C	1.2	1	F			
ASA748-165-800		Smoke	Black / blue	EN 166 EN 172	5	2.5	1	F			

# M9400

The M9400 safety spectacle weighs only 24g, with wraparound single lens design and built-in nose bridge for comfortable all-day wear.



## M9400 SPECIFICATIONS

Spectacle: EN 166  
Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
ASA718-161-100		Clear	Black	EN 166 EN 170							
ASA718-165-000		Smoke	Black	EN 166 EN 172							

# STEALTH™ JUNIOR

Stealth™ Junior is extremely lightweight and comfortable, with contoured design offering a great fit for smaller faces.



## STEALTH™ JUNIOR SPECIFICATIONS

Spectacle: EN 166  
Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Protection at extremes of temperature	Designed to suit small heads	Anti-scratch coating	Anti-mist coating
ASA918-321-100		Clear	Clear	EN 166 EN 170								

# M9200 VISISPEC

Single lens safety spectacle offering excellent value for money, with clear polycarbonate lens, temples and built-in side shields.



## M9200 VISISPEC SPECIFICATIONS

Spectacle: EN 166  
Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
ASD020-121-300		Clear	Clear	EN 166							

## M9100

Wraparound spectacle with side shields, offering a wide field of vision and complete protection. Moulded nose bridge and adjustable temples for enhanced comfort.



### M9100 SPECIFICATIONS

Spectacle: EN 166  
Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
ASA240-021-100		Clear	Black	EN 166							
								F			

## JUNIOR WRAPAROUND

The Junior Wraparound spectacle features a one-piece lens with contoured side arms designed to offer a great fit for smaller faces.



### JUNIOR WRAPAROUND SPECIFICATIONS

Spectacle: EN 166  
Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Protection at extremes of temperature	Designed to suit small heads	Anti-scratch coating	Anti-mist coating
ASA908-321-100		Clear	Black	EN 166 EN 170								
								F				

## M9300 OVERSPEC

Overspectacle with extended wraparound polycarbonate lens and side shield temples. Suitable for use with prescription (Rx) eyewear.



### M9300 OVERSPEC SPECIFICATIONS

Spectacle: EN 166  
Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
ASD028-261-300		Clear	Clear	EN 166							
								F			

# STEALTH™ COVERLITE™ LIGHTEST OVERSPECTACLE

STEALTH  
COVERLITE



The lightweight and spacious design of the Stealth™ Coverlite™ enables comfortable wear with prescription (Rx) eyewear. The overspectacle weighs just 34g and features pantoscopic temples with soft TPR grip pads to provide a secure, pressure-free fit.



## STEALTH™ COVERLITE™ SPECIFICATIONS

Overspectacle: EN 166  
Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact: 45 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
ASA940-0A3-000		Clear	Black & Blue	EN 166 EN 170	2C	1.2		F	T		
ASA940-061-300		Clear	Black	EN 166 EN 170	2C	1.2		F	T		
ASA940-063-000		Smoke	Black	EN 166 EN 172	5	2.5		F	T		

# COVERLITE™

Coverlite™ fits over prescription (Rx) eyewear to provide unrestricted clear vision. The overspectacle is flexible with metal-free hinges and Flexofit™ pantoscopic grip arms, providing an adaptable fit. Orange 550 lens available for specific applications such as light lamp, dentist and medical application. GW5 shade for welding applications. GW5 shade for welding applications.



## COVERLITE™ SPECIFICATIONS

Overspectacle: EN 166  
Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact: 45 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
1COV23OR550		UV Orange	Black & orange	EN 166 EN 170	2	2		F	T		
1COV23W5		GW5 Welding	Black	EN 166 EN 169	5			F			

# STEALTH™ HYBRID COMBINED PROTECTION

Stealth™ Hybrid functions as a spectacle and goggle. The temples disconnect to enable fitting of the supplied head strap, with optional replacement lenses available, for versatile and adaptable protection.



STEALTH  
HYBRID



## STEALTH™ HYBRID SPECIFICATIONS

Spectacle/Goggle: EN 166

Lenses: Clear lens: EN 170 / Smoke lens: EN 172

Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Low energy impact 45 m/s	Medium energy impact 120 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating
					UV	VLT	1	F	B	T	✓	✓
ASA450-151-102 (Spectacle Mode)		Clear	Black	EN 166 EN 170	2C	1.2	1	F	T	T	premier SHIELD™	
	✓										✓	
ASA450-151-102 (Goggle Mode)		Clear	Black	EN 166 EN 170	2C	1.2	1	B	B	T	premier SHIELD™	
	✓										✓	
ASB450-051-300 (Replacement lens)		Clear		EN 166 EN 170	2C	1.2	1	F*	B**	T	premier SHIELD™	
	✓										✓	
ASB450-0A3-000 (Replacement lens)		Smoke		EN 166 EN 172	5	2.5	1	F*	B**	T	premier SHIELD™	
	✓										✓	

\*F-rated impact when in spectacle mode  
\*\*B-rated impact when in goggle mode

# STEALTH™ 9200 FACESHIELD GOGGLE

A combination of indirect vented goggle and face protection with a sleek, modern design, engineered to offer outstanding performance and comfort.



STEALTH  
9200



## STEALTH™ 9200 SPECIFICATIONS

Goggle/Faceshield: EN 166

Clear lens: EN 170

Product Code	Product Reference	Lens Colour	Frame	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Medium energy impact 120 m/s	Protection at extremes of temperature	Liquid droplets	Large dust particles (>5 microns)	Gases and fine dust particles (<5 microns)	Molten metals and hot solids	Anti-scratch coating	Anti-mist coating
					UV	VLT	1	B	T	3	4	5	9	✓	✓
AGW010-603-000		Opaque grey	Opaque Grey	EN 166 EN 170	2C	1.2	1	B	T	✓	✓	✓	✓	MistResist+	
															✓

\*Faceshield attachment provides impact resistance only.

# PANOWELD® WELDING GOGGLE

Panoramic shade 5 goggle with indirect vent, soft comfort frame and wide elasticated adjustable headband. 2.5mm green polycarbonate lens with anti-mist coating.



PANOWELD® SPECIFICATIONS					Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Medium energy impact 120 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating	Liquid droplets	Large dust particles (>5 microns)	Gases and fine dust particles (<5 microns)	Molten metals and hot solids
Product Code	Product Reference	Lens Colour	Frame Colour	Product Standard											
G-Panoweld		Green	Red Et Black	EN 166 EN 169	5			B		MistResist+		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>

# EVO® GOGGLE THERMEX™ FOG-FREE VISION

With a polycarbonate outer lens and acetate inner lens, EVO® goggle Thermex™ provides efficient fogging resistance with Moisture Control technology for fog-free vision even at low temperatures.



**THERMEX**



EVO® GOGGLE THERMEX™ SPECIFICATIONS					Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Medium energy impact 120 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating	Liquid droplets	Large dust particles (>5 microns)	Gases and fine dust particles (<5 microns)	Molten metals and hot solids
Product Code	Product Reference	Lens Colour	Frame	Product Standard											
AGM020-723-000		Clear double lens	Opaque Grey Et Black	EN 166 EN 170	2C	1.2		B	T	premier SHIELD™ <input checked="" type="checkbox"/> K Rated <input checked="" type="checkbox"/> N Rated		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>

# EVO® GOGGLE LOW PROFILE DESIGN

Engineered to offer outstanding performance, compatibility, comfort, and style, the EVO® goggle range includes three goggles offering protection against different hazards. Compatible with the EVO® range of helmets



**evoGoggle™**  
evolution



EVO® GOGGLE SPECIFICATIONS					Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Medium energy impact 120 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating	Liquid droplets	Large dust particles (>5 microns)	Gases and fine dust particles (<5 microns)	Molten metals and hot solids
Product Code	Product Reference	Lens Colour	Frame	Product Standard											
AGM020-823-000		Clear double lens	Opaque grey Et Black	EN 166 EN 170	2C	1.2		B	T	premier SHIELD™ <input checked="" type="checkbox"/> K Rated <input checked="" type="checkbox"/> N Rated		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>
AGM020-623-000		Clear single lens	Opaque grey Et Black	EN 166 EN 170	2C	1.2		B	T	MistResist+™ <input checked="" type="checkbox"/> N Rated		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>
AGM030-623-000		Clear single lens	Non vented Opaque grey	EN 166 EN 170	2C	1.2		B	T	MistResist+™ <input checked="" type="checkbox"/> N Rated		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

## PROFILE™

Profile™ is made from flexible PVC and features a metal-free adjustable strap. Available with polycarbonate or acetate lens, and vented or non-vented frame. Compatible with prescription (RX) eyewear.



PROFILE™ SPECIFICATIONS					Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Medium energy impact 120 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating	Liquid droplets	Large dust particles (>5 microns)	Gases and fine dust particles (<5 microns)	Molten metals and hot solids
Product Code	Product Reference	Lens Colour	Frame	Product Standard											
2PROV23C		Clear	Clear	EN 166 EN 170	2C	1.2	1	B	T	 K Rated N Rated					
		GW5 Welding	Black	EN 166 EN 169	5		1	B	T		 K Rated N Rated				
2PRONV31C (Acetate lens)		Clear	Non vented clear	EN 166 EN 170	2C	1.2	1	F	T	 N Rated					

## COSMOS™

Cosmos™ features a panoramic lens offering a wide field of vision and compatibility with prescription (RX) eyewear. Indirect ventilation enables airflow, helping to increase comfort and prevent misting.



COSMOS™ SPECIFICATIONS					Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Medium energy impact 120 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating	Liquid droplets	Large dust particles (>5 microns)	Gases and fine dust particles (<5 microns)	Molten metals and hot solids
Product Code	Product Reference	Lens Colour	Frame	Product Standard											
2COS23C		Clear	Clear & Blue	EN 166	2	1.2	1	B	T	 K Rated N Rated					

## STONE™

The Stone™ goggle provides complete protection with indirect ventilation and a wide adjustable elasticated strap for added comfort. Compatible with prescription (RX) eyewear.



STONE™ SPECIFICATIONS					Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Medium energy impact 120 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating	Liquid droplets	Large dust particles (>5 microns)	Gases and fine dust particles (<5 microns)	Molten metals and hot solids
Product Code	Product Reference	Lens Colour	Frame	Product Standard											
2STONEV23C		Clear	Opaque Grey	EN 166 EN 170	2C	1.2	1	B		 N Rated					

# ATLANTIC™

The Atlantic™ goggle features a wide angle panoramic lens with adjustable elasticated headband and indirect ventilation for enhanced comfort.



## ATLANTIC™ SPECIFICATIONS

Goggle: EN 166  
Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Medium energy impact 120 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating	Liquid droplets	Large dust particles (>5 microns)	Gases and fine dust particles (<5 microns)	Molten metals and hot solids
AGN020-441-300		Clear	Clear	EN 166 EN 170											
										<b>MistResist</b>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

# MARTCARE® DV & IDV SAFETY GOGGLE

A compact and lightweight cost-effective goggle with polycarbonate lens and PVC frame. Available with direct or indirect ventilation.



## MARTCARE® DV & IDV SPECIFICATIONS

Goggle: EN 166  
Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Medium energy impact 120 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating	Liquid droplets	Large dust particles (>5 microns)	Gases and fine dust particles (<5 microns)	Molten metals and hot solids
AGC010-301-300		Clear	DV Clear	EN 166											
										<b>HARDJ</b>	<input checked="" type="checkbox"/>				
AGC021-201-300		Clear	IDV Clear	EN 166 EN 170											
										<b>MistResist</b>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
AGC020-301-300		Clear	IDV Clear	EN 166 EN 170											
										<b>HARDJ</b>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			

# JUNIOR IDV SAFETY GOGGLE

The Junior Indirect Vent goggle is designed to offer a great fit for smaller faces.



## JUNIOR IDV SPECIFICATIONS

Goggle: EN 166  
Lens: Standard as listed below

Product Code	Product Reference	Lens Colour	Frame	Product Standard	Lens shade markings	Visible light transmission	Optical class (1=high, 3=low)	Medium energy impact 120 m/s	Protection at extremes of temperature	Anti-scratch coating	Anti-mist coating	Liquid droplets	Large dust particles (>5 microns)	Gases and fine dust particles (<5 microns)	Molten metals and hot solids	Designed to suit small heads
AGT020-141-300		Clear	IDV Clear	EN 166 EN 170												
										<b>MistResist</b>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	H Rated	

# EVOGuard<sup>®</sup>C INDUSTRIAL BROWGUARD SYSTEM



The EVOGuard<sup>®</sup>C Industrial browguard system offers a host of features designed in-house by the JSP R&D team. Developed over three years, EVOGuard<sup>®</sup> maximises compatibility for optimum comfort and protection levels with simple, effortless maintenance.



**EVOGuard<sup>®</sup>C2 INDUSTRIAL BROWGUARD SYSTEM**  
EN 166, EN 170, EN 352-3

**ADB28A-100-400** EVOGuard<sup>®</sup>C2 Industrial Browguard System



**EVOGUARD<sup>®</sup>C INDUSTRIAL BROWGUARD**

**ADB280-000-400** EVOGuard<sup>®</sup>C Industrial Browguard

# EVOGuard<sup>®</sup>C INDUSTRIAL VISOR RANGE



Five high-performance industrial visors are available, enabling users to select the perfect option for their task and price point. Visors are fully compatible with the EVOGuard<sup>®</sup> browguard systems and EVO<sup>®</sup> helmets.

Available for:




## VISOR SPECIFICATIONS

		EN 170	EN 166							*GS-ET-29						
		2C - 1, 2 - UV Filter with Enhanced Colour Recognition	A - High Energy Impact (190m/s)	B - Medium Energy Impact (120m/s)	T - High Speed Particles at Extreme Temperatures	1 - Optical Class	3 - Liquid Droplets & Splash	9 - Molten Metals	K - Anti-Scratch	N - Anti-Mist	8 - Short Circuit Electric Arc	1 - Fault Arc Class	0 - Visible Light Transmittance	Increased Chemical Resistance	Visor Material	Weight (g)
	ADA240-060-000														Polycarbonate Clear Visor	185g
	ADA250-060-000 Visor Length 185mm 7.5"														Polycarbonate Clear Visor	185g
	ADA260-070-000 ADA260-070-00C EVO <sup>®</sup> VISTA <sup>®</sup> Compatible														Co-Polyester Clear Visor	232g
	ADA270-070-000 ADA270-070-00C EVO <sup>®</sup> VISTA <sup>®</sup> Compatible														Polycarbonate Clear Visor	216g
	ADA280-070-000 ADA280-070-00C EVO <sup>®</sup> VISTA <sup>®</sup> Compatible														Polycarbonate Clear Visor	216g

HM = Helmet mounted. BM = Browguard mounted \*The EVOGuard<sup>®</sup> C5 Max should be used as part of an arc flash protective ensemble that also includes suitable arc flash protective clothing and gloves.

# EVOGuard® M FORESTRY HELMET SYSTEMS



The EVOGuard® M Forestry Helmet System combines the robust EVO®5 safety helmet with an EVOGuard® M high-performance forestry visor and Sonis® Compact ear defenders, offering certified-compatible head, eye, face and hearing protection.



**EVOGuard® M2 FORESTRY HELMET SYSTEM**  
EN 397, EN 166, EN 1731, EN 352-3

**AKE24A-400-800** EVOGuard® M2 Forestry System



**EVOGuard® M3 FORESTRY HELMET SYSTEM**  
EN 397, EN 166, EN 1731, EN 352-3

**AKE24A-500-800** EVOGuard® M3 Forestry System

# EVOGuard® M FORESTRY BROWGUARD SYSTEMS



The EVOGuard® M Forestry browguard system and replacement forestry visors offer a host of features designed in-house by the JSP R&D team. Developed over three years, EVOGuard® maximises compatibility for optimum comfort and protection levels with simple, effortless maintenance.



**EVOGuard® M2 FORESTRY BROWGUARD SYSTEM**  
EN 166, EN 170, EN 1731, EN 352-3

**ADB28A-300-800** EVOGuard® M2 Forestry Browguard System

**ADB280-000-800** EVOGuard® M Forestry Browguard only



**EVOGuard® M3 FORESTRY BROWGUARD SYSTEM**  
EN 166, EN 170, EN 1731, EN 352-3

**ADB28A-400-800** EVOGuard® M3 Forestry Browguard System

**ADB280-000-800** EVOGuard® M Forestry Browguard only

# EVOGuard® M FORESTRY VISOR RANGE



Three high-performance forestry visors are available, enabling users to select the perfect option for their task and price point. Visors are fully compatible with the EVOGuard® browguard systems and EVO® helmets.



## VISOR SPECIFICATIONS

Available for:



		EN 1731	S - Increased Robustness	F - Low Energy Impact (45m/s)	Frame Material	Visible Light Transmittance	Visor Material	Weight (g)
	 ADA290-080-000 Visor Length 180mm 7.4"				ABS Overmoulded frame		Woven Nylon Mesh	65g
	 ADA300-080-000 Visor Length 180mm 7.4"				ABS Overmoulded frame		Woven Stainless Steel Mesh	75g
	 ADA310-080-000 EVO® VISTA® Compatible Visor Length 180mm 7.4"				ABS Overmoulded frame		Etched Stainless Steel Mesh	86g

# AFP-25 FACESHIELD - ARC FLASH PROTECTION

Designed to provide the ultimate in industrial-grade arc flash eye and face protection, the AFP-25 faceshield meets GS-ET-29 Class 2 with an ATPV rating of 25cal/cm<sup>2</sup> under ASTM F2178.



Available for:

Available for:

**AFP-25 HELMET MOUNTED FACESHIELD**  
EN 166, EN 170, GS-ET-29



**AFF122-440-408** AFP-25 Helmet Mounted Faceshield

**AFP-25 HELMET MOUNTED FACESHIELD**  
With weight balancing system  
EN 166, EN 170, GS-ET-29



**AFF132-440-408** AFP-25 Helmet Mounted Faceshield with weight balancing system

Should be worn as part of a complete arc flash ensemble.


## FACESHIELD PROPERTIES

	EN 170	EN 166				*GS-ET-29				Weight Balancing System	Integrated Browguard	Integrated Chinguard	Side Plates	Visor Material	Visor Thickness	Weight (g)
		2C - 2 - UV Filter with Enhanced Colour Recognition	B - Medium Energy Impact (120m/s)	1 - Optical Class	K - Anti-Scratch	8 - Short Circuit Electric Arc Class	8 - Short Circuit Electric Arc Class	2 - Fault Arc Class	2 - Visible Light Transmittance							
<b>AFF122-440-408</b> (AFP-25 Faceshield)									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Polycarbonate Visor	2.6mm	465g	
<b>AFF132-440-408</b> (AFP-25 with Weight Balancing System)									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Polycarbonate Visor	2.6mm	497g	


\*AFF122-440-408 is compatible and certified for use with JSP EVO® range of helmets.  
AFF132-440-408 is compatible and certified for use with JSP EVO®5 helmets.

# EVOGuard® C5 MAX ELECTRICAL HELMET SYSTEM

The EVOGuard® C5 MAX Helmet System combines the EVO®5 Olympus® global industrial safety helmet with the EVOGuard® C5 MAX visor, offering Class 1 arc protection. The panoramic visor provides A-rated impact resistance, UV filtering and K&T anti-scratch, anti-mist properties.



**EVOGuard® C5 MAX ELECTRICAL HELMET SYSTEM**  
EN 166, EN 170, GS-ET-29, EN 397, EN 50365



**EN 50365 ELECTRICAL PROTECTION TO 1000V**

**AKE24C-600-100** EVOGuard®C5 MAX Electrical Helmet System

Should be worn as part of a complete arc flash ensemble.

## VISOR SPECIFICATIONS

	EN 170	EN 166						*GS-ET-29			Visor Material	Weight (g)		
		2C - 1, 2 - UV Filter with Enhanced Colour Recognition	A - High Energy Impact (190m/s)	B - Medium Energy Impact (120m/s)	T - High Speed Particles at Extremes of Temperature	1 - Optical Class	3 - Liquid Droplets & Splash	9 - Molten Metals	K - Anti-Scratch	N - Anti-Mist			8 - Short Circuit Electric Arc	1 - Fault Arc Class
<b>EVOGUARD C5 Max</b> ADA280-070-000													Polycarbonate Clear Visor	216g

HM = Helmet mounted. BM = Browguard mounted \*The EVOGuard® C5 Max should be used as part of an arc flash protective ensemble that also includes suitable arc flash protective clothing and gloves.

# COBRA® WELDING, GRINDING FACESHIELD



The Cobra® welding visor features an auto-darkening filter (shades 9-13) and quick change anti-splatter screen, available with adjustable browguard or helmet-mounted for use with EVOLite®.



## COBRA® FACESHIELD

EN 175, EN 379, EN 166

**AFD230-001-100**

Cobra® Welding Visor - DIN 9-13

**AFX230-001-100**

Cobra® Welding Visor for EVO® helmets - DIN 9-13



## EVOLITE® SAFETY HELMET WITH COBRA® WELDING VISOR



EN 397, EN 175, EN 379, EN 166

**AFY230-000-100**

Cobra® welding visor DIN 9-13 with EVOLite® mid peak wheel vented



### FACESHIELD PROPERTIES

	EN 166				Adjustable Browguard	Wheel ratchet adjustment	Integrated Browguard	Visor Material	Width	Height	Length	Weight (g)
	B - Medium Energy Impact (120m/s)	1 - Optical Class	3 - Liquid Droplets Et. Splash	9 - Molten Metals								
 <b>AFD230-001-100</b> (Cobra® Faceshield)								ABS Overmoulded frame	270mm	340mm	300mm	340g
 <b>AFY230-000-100</b> (EVOLite® Safety Helmet with Cobra® Welding Visor)								ABS Overmoulded frame	270mm	365mm	300mm	688g

# MARTCARE® FACESHIELD

Grey browguard with polycarbonate visor, wheel ratchet adjustment and comfort pad.



## MARTCARE® PREMIUM FACESHIELD

**AFPO61-230-400**






Martcare® Premium Faceshield with 20cm Polycarbonate Visor







	EN 166				Adjustable Browguard	Wheel ratchet adjustment	Integrated Browguard	Visor Material	Width	Height	Length	Weight (g)
	B - Medium Energy Impact (120m/s)	1 - Optical Class	3 - Liquid Droplets Et. Splash	9 - Molten metals and hot solids								
								Polycarbonate Clear Visor	215mm	117mm	384mm	465g





# EYE & FACE ACCESSORIES

A range of accessories including storage solutions designed to prevent damage. RX kits integrate prescription lenses, improving compatibility without the need for bespoke prescription safety eyewear. Strap and lens kits optimise protection for different applications.

STORAGE					
Code	Product	Image	Code	Product	Image
ASU120-001-100	Zipped soft spectacle case		ASU100-001-100	Black microfibre spectacle bag	
ASU150-001-100	Zipped hard spectacle case		AGU020-001-100	Black microfibre goggle bag	
ASU080-000-000	Hanging spectacle holder				

ATTACHMENTS & REPLACEMENT PARTS					
Code	Product	Image	Code	Product	Image
AST000-000-000	RX modular prescription kit to fit Force <sup>®</sup> 10 / EVO <sup>®</sup> Goggle / Maxview™ / Filterspec <sup>®</sup> Pro		ASB450-051-300	Stealth™ Hybrid replacement clear PremierShield™ KN	
ASU010-000-000	Panorama spectacle cord loop fitting - black		ASB450-0A3-000	Stealth™ Hybrid replacement smoke PremierShield™ KN	
4EIGBST	Foam gasket & strap kit for Eiger™ safety specs		ADB800-000-300	Replacement EVOGuard <sup>®</sup> Browguard Extended Sweatband - Pack of 1	

DISPLAY STANDS					
Code	Product	Image	Code	Product	Image
VAS060-000-100	JSP spectacle display stand complete with mirror (holds 5)		VAS060-000-000	JSP spectacle display stand (holds 5)	

# USE CLEAN REPEAT

Keeping PPE clean is crucial for hygiene and protection. Unclean equipment can cause irritation for the wearer and may not be able to perform at the intended level. Following the proper cleaning and maintenance procedures maximises usage life, allowing PPE to be reused for longer.

JSP offer a range of non-abrasive, alcohol-free cleaning products, designed to enable easy maintenance and protect your PPE.



## LENS & PPE CLEANING STATION

Wall mounted Lens and PPE Cleaning Station including 4 boxes of 280 tissues and 1 bottle of cleaning spray. All items can be replaced and refitted in the cleaning station which helps to keep all necessary equipment contained and in one place.

**ASU200-000-200** Complete with 4x boxes of 280 tissues, 1x500ml cleaning fluid, label & mirror

## TISSUES

Each box contains 280 tissues that are low lint, soft, non-abrasive and absorbent for easy cleaning. Use with cleaning spray for best results.

**ASU200-000-300** Box of 280 multi function cleaning tissues

## WIPES

100 alcohol-free PPE cleaning wipe sachets suitable for a range of JSP PPE, including safety spectacles, goggles, faceshields, reusable half and full face masks, and ear defenders.

**ASU200-000-100** Box of 100 pre-moistened lens and PPE wipes

## CLEANING SPRAY

Anti-bacterial, anti-static spray cleaning fluid. Alcohol- and silicone-free.

**ASU200-000-400** 500ml bottle of lens and PPE cleaning fluid

## JSP GUIDES ONLINE

Digital user guides and tutorial videos demonstrate how to fit and maintain products correctly.



# JSP LOGO EXPRESS®

## STEALTH™ 9000 BRANDING

### 1 SELECT EYEWEAR COLOUR

Choose the colours for your Stealth™ 9000 and where you want your logo to be printed using the table opposite.

### 2 SUPPLY ARTWORK




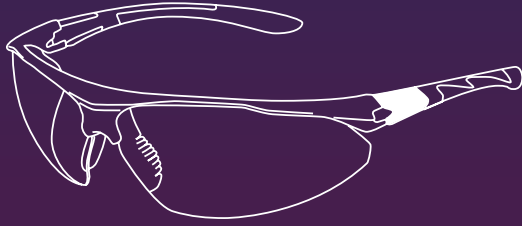
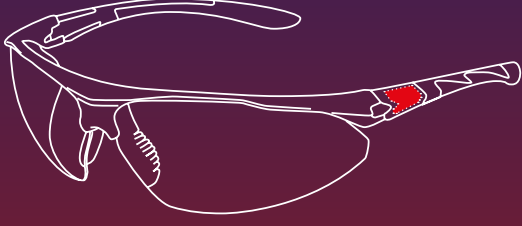
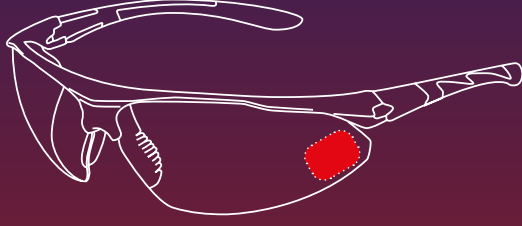
Email logo design artwork and pantone reference number to [logos@jsspsafety.com](mailto:logos@jsspsafety.com), preferably Adobe Illustrator .ai or .eps files as well as a JPEG file. Other file types are accepted, however these may incur additional set-up charges.

### 3 APPROVE PROOFS


JSP will provide colour proofs via email. Confirm your order by contacting [logos@jsspsafety.com](mailto:logos@jsspsafety.com), alternatively state any amendments that you require. Minimum order quantities apply\*.

For delivery lead-times, Minimum Order Quantities and other supply related terms and conditions, please visit [www.jsspsafety.com](http://www.jsspsafety.com) or contact JSP Customer Service.

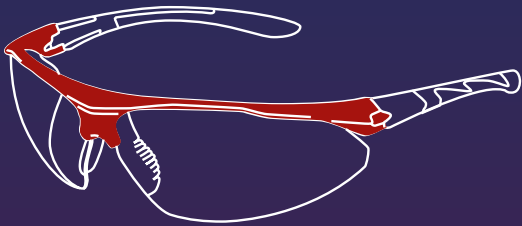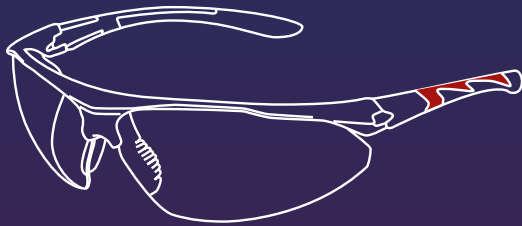

	
<p>FRAME COLOUR</p>	<p>ARM COLOUR</p>
	
<p>ARM GRIP COLOUR</p>	<p>TEMPLE CLIP COLOUR</p>
	
<p>BRAND THE TEMPLE</p>	<p>BRAND THE LENS</p>


Minimum Order Quantities:  
 \*STEALTH™ 9000 MOQ - 1200

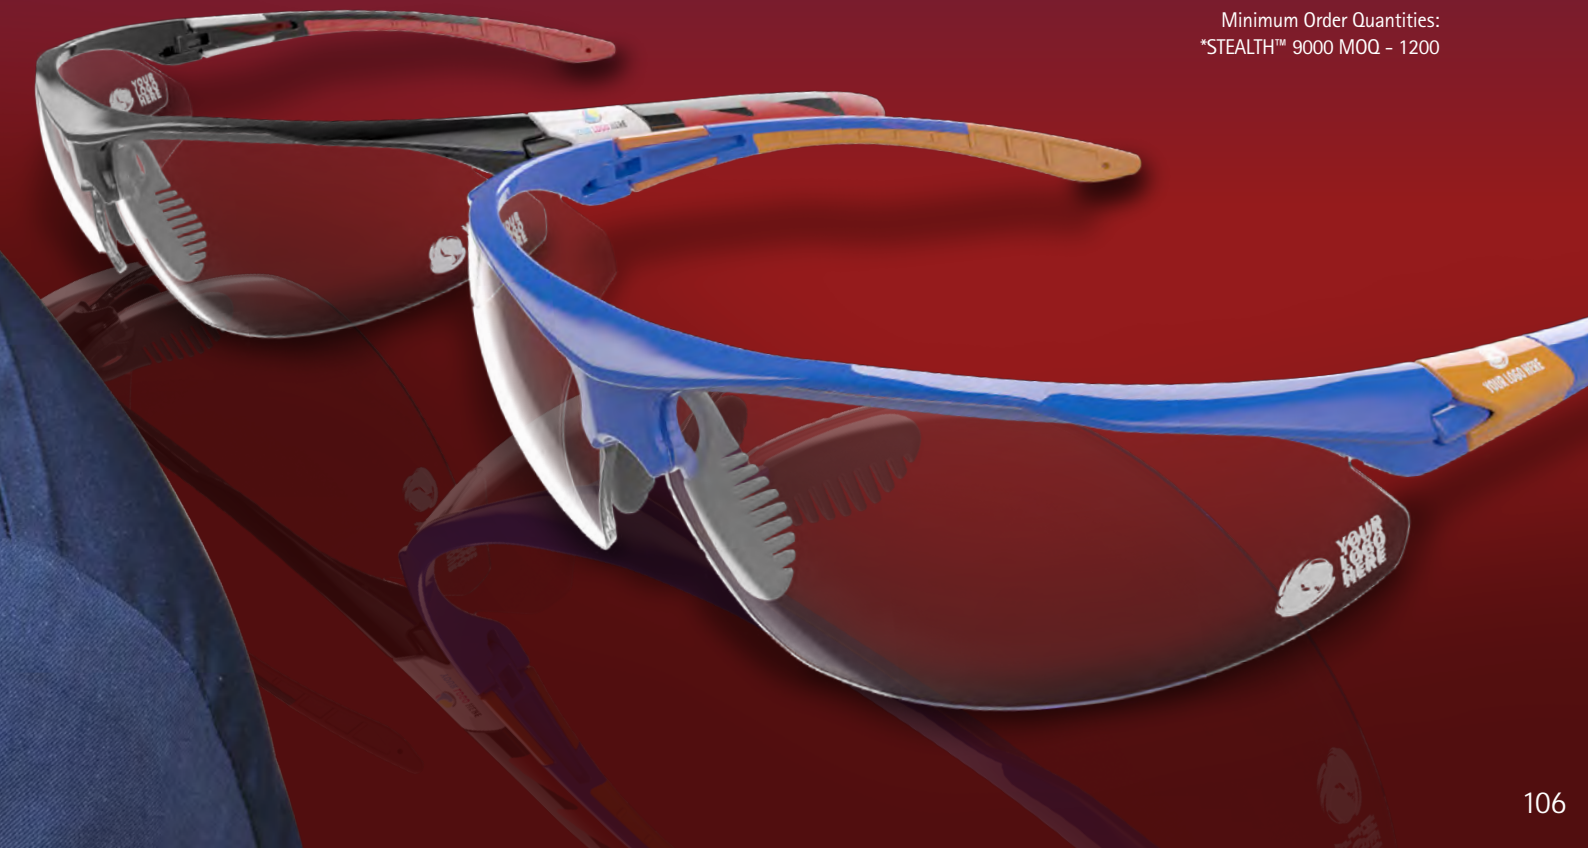

# HEARING PROTECTION

Noise poses a hazard to workers across many industries, risking irreversible health conditions such as tinnitus and hearing loss. We are committed to helping workplaces tackle harmful noise.

JSP design and manufacture high-quality hearing protection, leading the industry with the first range of hearing protective equipment assured by the BSI Kitemark™ scheme. The JSP R&D team work with independent test houses and research facilities to develop innovative noise solutions that perform at the highest levels. State-of-the-art in-house test equipment is used to assess products and support ongoing development. Compatible, customisable options with a wide range of attenuation offer high-performance hearing protection for every site.

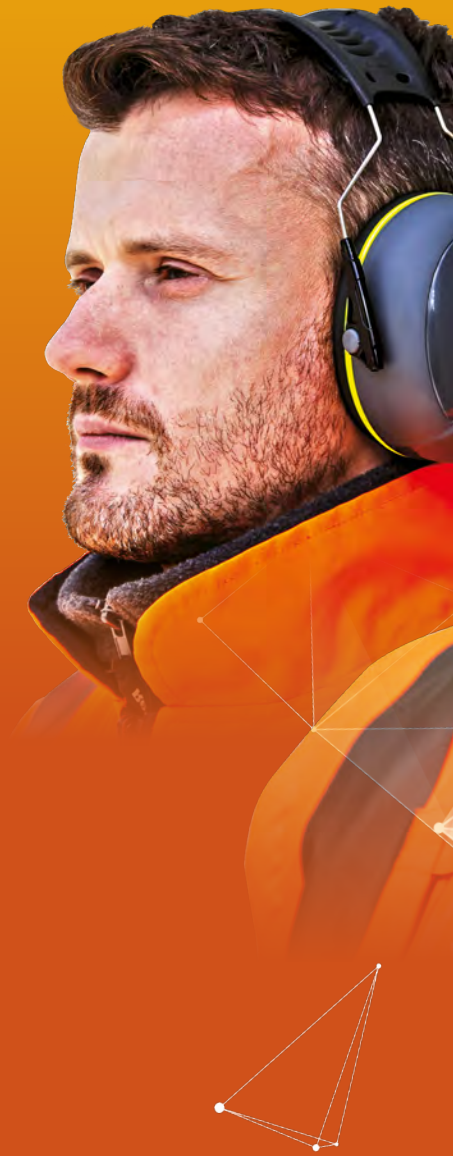



# EAR DEFENDER SELECTION

## WHAT IS SNR?

Hearing protection is given a Single Number Rating (SNR). The SNR is a general means of comparing the protection levels of different ear defenders.

## EXPOSURE LEVEL

The aim when selecting suitable hearing protection is to achieve an average exposure level of 80dB for the wearer.

## EXPOSURE TIME


The amount of time spent in a loud environment can determine which level of protection is required but generally it is based on an 8hr working day.

## OVERPROTECTION

It should be understood that the highest SNR value is not always the most suitable. It is possible to over protect by preventing the wearer from hearing important sounds such as warning signals or approaching vehicles.


## MAKE SELECTION

To calculate the required noise reduction and select the appropriate protection it is necessary to follow the simple steps to the right:

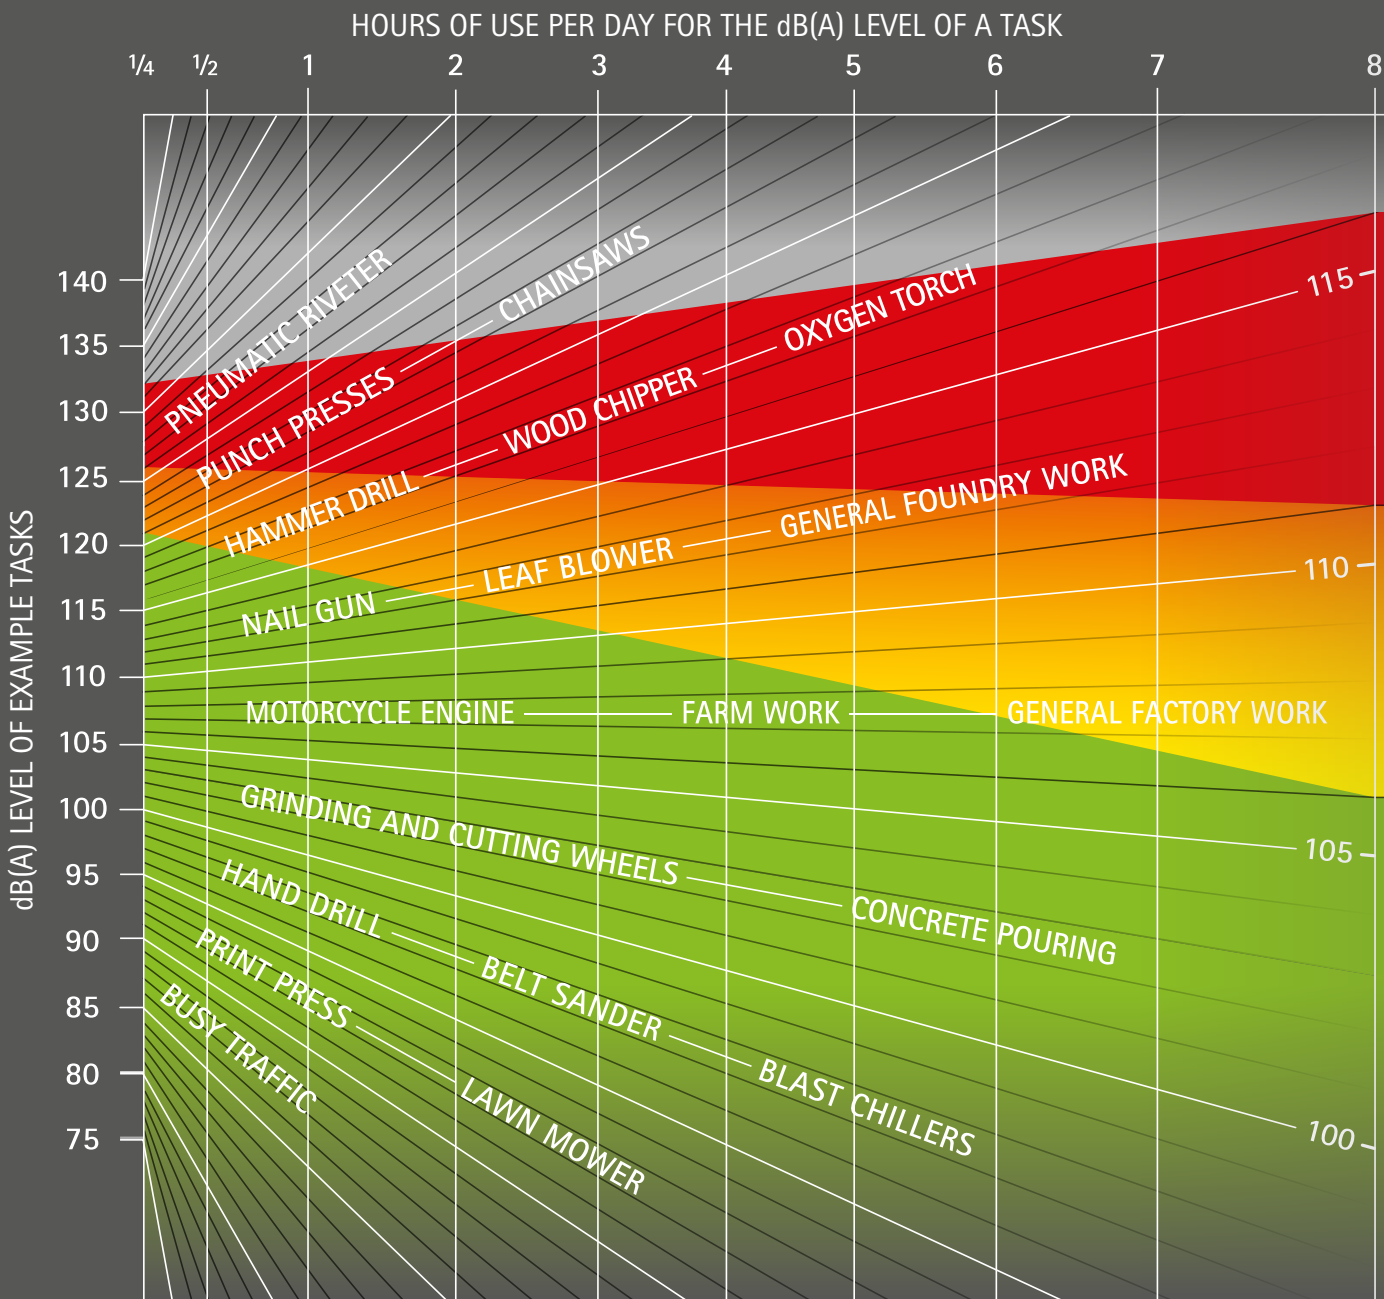

This chart uses decibel levels of work place environments and has example tasks to give an idea of real world sound levels. It includes the amount of time that you could potentially spend in a particular environment. This chart is for general guidance only and should not be considered a substitute for a full risk assessment.

80dB - Desired average exposure level for the wearer

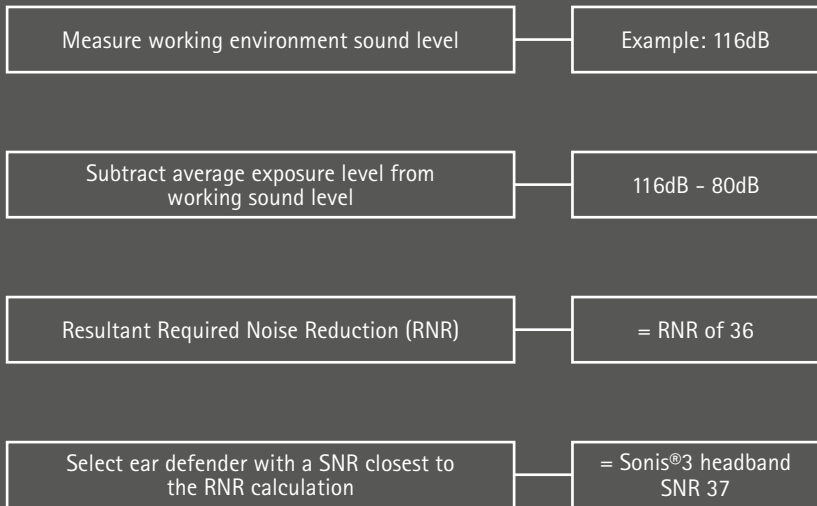

**112-117dB  
HIGH ATTENUATION**

**SONIS®3**  
SNR 37

**SONIS®3**  
SNR 36



**107-112dB  
MEDIUM ATTENUATION**

**SONIS COMPACT**  
SNR 32

**SONIS COMPACT**  
SNR 31

**SONIS®2**  
SNR 31dB

**80-107dB  
LOW ATTENUATION**

**SONIS®1**  
SNR 27

**SONIS®1**  
SNR 26



*"The Kitemark™ is the ultimate accreditation of quality - it is evidence that ALL production is ongoing batch tested to the relevant EN Standard which is then audited and verified by the British Standard Institution."*



# SONIS® HEADBAND EAR DEFENDERS



Working with a leading acoustics research facility, JSP R&D developed an ear defender range that peaks at an unbeaten 37dB SNR. Sonis® ear defenders are fully adjustable with a ventilated comfort headband. Cups can be produced in custom colours and printed with a company logo. Find out more about customisation options on page 115.



**SONIS® 1**  
HEADBAND EAR DEFENDERS  
EN 352-1, SNR=27

**sonis 1**  
SNR 27

Frequency (Hz) H = 31 M = 24 L = 16

SNR=27

**AEB010-0AY-800** Sonis®1 Headband Ear Defenders

**AEB800-000-300** Sonis®1 hygiene kit



**SONIS® 2**  
HEADBAND EAR DEFENDERS  
EN 352-1, SNR=31

**sonis 2**  
SNR 31

Frequency (Hz) H = 34 M = 29 L = 21

SNR=31

**AEB020-0AY-900** Sonis®2 Headband Ear Defenders

**AEB810-000-200** Sonis®2 hygiene kit



**SONIS® COMPACT**  
HEADBAND EAR DEFENDERS  
EN 352-1, SNR=32

**sonis COMPACT**  
SNR 32

Frequency (Hz) H = 35 M = 29 L = 21

SNR=32

**AEB030-0AY-000** Sonis®C Headband Ear Defenders

**AEB820-000-800** Sonis®C hygiene kit



**SONIS® 3**  
HEADBAND EAR DEFENDERS  
EN 352-1, SNR=37

**sonis 3**  
SNR 37

Frequency (Hz) H = 37 M = 35 L = 27

SNR=37

**AEB040-0A1-A00** Sonis®3 Headband Ear Defenders

**AEB830-000-600** Sonis®3 hygiene kit



		HEADBAND
EN STANDARD		EN 352-1
WEIGHT	Sonis®1	210g +/-5g
	Sonis®2	259g +/-5g
	Sonis®C	230g +/-5g
	Sonis®3	358g +/-5g
MATERIALS	Cups/Plate	ABS
	Attachment arm	Steel, acetal & nylon
	Headband	Acetal, Steel, TPE
	Sealing ring	PET-G plate, TPU skin, foamed polymer
	Inner foam	Polyurethane foam



# SONIS® MOUNTED EAR DEFENDERS



Sonis® Mounted ear defenders offer certified compatibility with JSP EVO® helmets and EVOGuard® browguards. The fully adjustable adaptors are designed to fit with a range of visor systems for combined protection. Sonis® cups can be produced in custom colours and printed with a company logo. Find out more about customisation options on page 115.

Certified compatible with:

**SONIS® 1**  
MOUNTED EAR DEFENDERS  
EN 352-3, SNR=26

**Frequency (Hz)** H = 32 M = 23 L = 15  
**SNR=26**

**AEB010-0CY-800** Sonis®1 Mounted Ear Defenders

**AEB800-000-300** Sonis®1 hygiene kit

Certified compatible with:

**SONIS® COMPACT**  
MOUNTED EAR DEFENDERS  
EN 352-3, SNR=31

**Frequency (Hz)** H = 35 M = 28 L = 20  
**SNR=31**

**AEB030-0CY-000** Sonis®C Mounted Ear Defenders

**AEB820-000-800** Sonis®C hygiene kit

Certified compatible with:

**SONIS® COMPACT**  
FULL BRIM MOUNTED  
EAR DEFENDERS  
EN 352-3, SNR=31

**Frequency (Hz)** H = 35 M = 28 L = 20  
**SNR=31**

**AEB030-0DY-000** Sonis®C Full Brim Mounted Ear Defenders

**AEB820-000-800** Sonis®C hygiene kit

Certified compatible with:

**SONIS® 3 MOUNTED**  
EAR DEFENDERS  
EN 352-3, SNR=36

**Frequency (Hz)** H = 37 M = 35 L = 26  
**SNR=36**

**AEB040-0C1-A00** Sonis®3 Mounted Ear Defenders

**AEB830-000-600** Sonis®3 hygiene kit

		MOUNTED
EN STANDARD		EN 352-3
WEIGHT	Sonis®1	208g +/-5g
	Sonis®C	260g +/-5g
	Sonis®3	380g +/-5g
MATERIALS	Cups/Plate	ABS
	Attachment arm	Steel, acetal & nylon
	Pivot Arm	Acetal, Steel
	Sealing ring	PET-G plate, TPU skin, foamed polymer
	Inner foam	Polyurethane foam



Sonis® mounted ear defenders are tested in combination with JSP helmets and the EVOGuard® browguard, ensuring the correct level of hearing protection with each model, for certified compatibility.

# SONIS® COMMS EAR DEFENDERS



**SONIS® COMMS HEADBAND EAR DEFENDERS WITH BLUETOOTH® WIRELESS TECHNOLOGY**  
EN 352-1, SNR=34

<b>Frequency (Hz)</b>	H = 34	M = 31	L = 25	<b>SNR = 34</b>
-----------------------	--------	--------	--------	-----------------

**AEB081-5A7-N00** Sonis® Comms Headband Ear Defenders With Bluetooth® Wireless Technology



**SONIS® COMMS HEADBAND EAR DEFENDERS**  
EN 352-1, SNR=34

<b>Frequency (Hz)</b>	H = 34	M = 31	L = 25	<b>SNR = 34</b>
-----------------------	--------	--------	--------	-----------------

**AEB081-4A8-N00** Sonis® Comms Headband Ear Defenders

## SPARE PARTS LIST:

AEB081-4A0-100	Headband Unit (white plates) without battery Pack, DMC® control pack or antenna
AEB081-5A0-500	Headband Unit (blue plates) without battery pack, DMC® control pack or antenna
AEB081-4C0-100	PPE Mounting Unit (white plates) without battery pack, DMC® control pack or antenna
AEB081-5C0-500	PPE Mounting Unit (blue plates) without battery pack, DMC® control pack or antenna
AEB081-700-000	USB & jack socket plugs
AEB081-100-000	Lithium ion battery pack



Certified compatible with:

**SONIS® COMMS MOUNTED EAR DEFENDERS WITH BLUETOOTH® WIRELESS TECHNOLOGY**  
EN 352-3, SNR=30

<b>Frequency (Hz)</b>	H = 31	M = 27	L = 19	<b>SNR = 30</b>
-----------------------	--------	--------	--------	-----------------

**AEB081-5C7-N00** Sonis® Comms Mounted Ear Defenders With Bluetooth® Wireless Technology



Certified compatible with:

**SONIS® COMMS MOUNTED EAR DEFENDERS**  
EN 352-3, SNR=30

<b>Frequency (Hz)</b>	H = 31	M = 27	L = 19	<b>SNR = 30</b>
-----------------------	--------	--------	--------	-----------------

**AEB081-4C8-N00** Sonis® Comms Mounted Ear Defenders

AEB081-300-000	DMC® control pack
AEB081-600-000	Antenna
AEB082-000-000	Sonis® Comms carry case
AEB081-000-000	AAA battery pack
AEB081-200-000	DMC® (bluetooth® & radio version)
AEB850-000-100	Sonis® Comms Hygiene Kit - White Plates
AEB840-000-500	Sonis® Comms Hygiene Kit - Bluetooth® - Blue Plates

## EAR DEFENDERS

Headband ear defenders offering a range of attenuation levels. Big Blue™ and J-Muff™ provide economical options with cups that slide and tilt to fit.



### BIG BLUE™ EAR DEFENDERS

EN 352-1 SNR=27

Frequency (Hz)

H = 30 M = 24 L = 17

SNR=27

AEA060-040-500

Big Blue™ Ear Defenders

### J-MUFF™ EAR DEFENDERS

EN 352-1 SNR=25

Frequency (Hz)

H = 29 M = 23 L = 15

SNR=25

AEA000-010-200

J-Muff™ Ear Defenders



## EARPLUGS

Reusable, easy-clean silicone earplugs with PVC cord supplied in compact carry case.

### MAXIFIT™ PRO WITH CORD

EN 352-2, SNR=32

Frequency (Hz)

H = 32 M = 29 L = 28

SNR=32

AEE110-060-200

Maxifit™ Pro Earplugs With Cord



Self-adjusting disposable earplugs designed to maximise noise protection and reduce pressure on the ear canal.

### SOUNDSTOPPERS™

EN 352-2 SNR=36

Frequency (Hz)

H = 34 M = 34 L = 31

SNR=36

AEE090-000-200

PU Foam Soundstoppers™ earplugs - 1 pair



## BANDED SOUNDSTOPPERS™

Reusable PU foam earplugs designed to be worn banded under the chin, offering maximum comfort with non-invasive design. The lightweight band provides a convenient method to fit and remove the earplugs.

### BANDED SOUNDSTOPPERS™

EN 352-2 SNR=20

Frequency (Hz)

H = 25 M = 15 L = 13

SNR=20

AEE090-070-21X

PU Foam Soundstoppers™ earplugs with black band



# JSP LOGO EXPRESS®

## CLEAR AND SIMPLE BRANDING

### 1 SELECT EAR DEFENDER

Choose your ear defender model.  
Select the correct attenuation level  
and headband / mounted option.

### 2 SUPPLY ARTWORK

Email logo design artwork to  
[logos@jspsafety.com](mailto:logos@jspsafety.com), preferably  
Adobe Illustrator .ai or .eps files plus  
a JPEG. Other file types accepted but  
may incur additional set-up charges.

### 3 APPROVE PROOFS

JSP will provide colour proofs via  
email. Confirm your order or advise  
any required amendments by  
contacting [logos@jspsafety.com](mailto:logos@jspsafety.com).  
Minimum order quantities apply.\*




For delivery lead-times,  
Minimum Order Quantities and  
other supply related  
terms and conditions, please  
visit [www.jspsafety.com](http://www.jspsafety.com) or  
contact JSP Customer Service.



# HEADBAND

SONIS 1	SONIS COMPACT	SONIS 2	SONIS 3
			
Logo area: 45mm x 25mm			

# MOUNTED

SONIS 1	SONIS COMPACT	SONIS 3
		
Logo area: 45mm x 25mm		

Minimum Order Quantities: MOQ - 40  
on grey or white Sonis® cups, maximum  
of 4 colours per logo. Please note:  
location of logo may differ as shown





MANUFACTURING  
FOR SAFETY



Group Head Office and UK Manufacturing Hub  
JSP LTD Worsham Mill, Minster Lovell, Oxford, OX29 0TA, England  
Tel: +44 (0)1993 826050 Fax: +44 (0)1993 824411  
sales@jgpsafety.com www.jgpsafety.com

Main European Office and Manufacturing Hub  
JSP GmbH, Wiesenstraße 57, 40549 Düsseldorf  
Tel: +49 (0) 211 50668449  
info@jgpsafety.de www.jgpsafety.de



www.jgpsafety.com sales@jgpsafety.com UK tel: +44 (0)1993 826050

**GENERAL DISCLAIMER**

It is the responsibility of Employers and Individuals to carry out a proper risk assessment by qualified Health and Safety personnel of any hazardous situation or activity. The Seller shall not be held liable for any loss, damage or injury sustained where no risk assessment has been carried out.

**DATA**

Product images, dimensions and descriptions are statements of opinion, provided for information only and form no part of the contract. Reasonable changes to designs and materials may be made without notice by the Seller without affecting the validity of the contract. All measurements

are approximate. All information in this publication has been checked for accuracy. However, the Seller cannot accept any liability for errors or omissions. The Seller reserves the right to alter specifications or to withdraw products from range without prior notice. No reproductions of any part of this catalogue may be made without the Seller's consent.